




Designed to illuminate outdoor walls and vertical surfaces, the CL-445-BT Bluetooth RGB-WW Wall Light features a robust square-profile design that provides a modern interpretation of classic path lighting.

Available colors: ANTIQUE BRONZE, BLACK, WHITE

Color Options: RGB + CCT 2700K- 5000K

Reset Button: Include

For straightforward and expert installation, all necessary mounting screws and a positioning template are supplied.

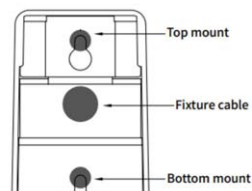

MOUNTING TEMPLATE TO SCALE


Two ways of mounting as below:

Type one: Wiring comes out from the top of the fixture.

1. Using the mounting template provided, align and mark the screws.
2. Insert and thread in the anchors, then insert the screws.

Note: The screws should not be fully screwed in; they need to protrude above the mounting surface. (0.18- 0.19 inch for the top screw and 0.06- 0.07 inch for the bottom screw).

4. Separate the wires, leaving enough space for the screws on top to pass through.
5. Hang the fixture on the screws.
6. Tighten the bottom screw until snug.
7. Connect the fixture wires to the main cable coming from the transformer.

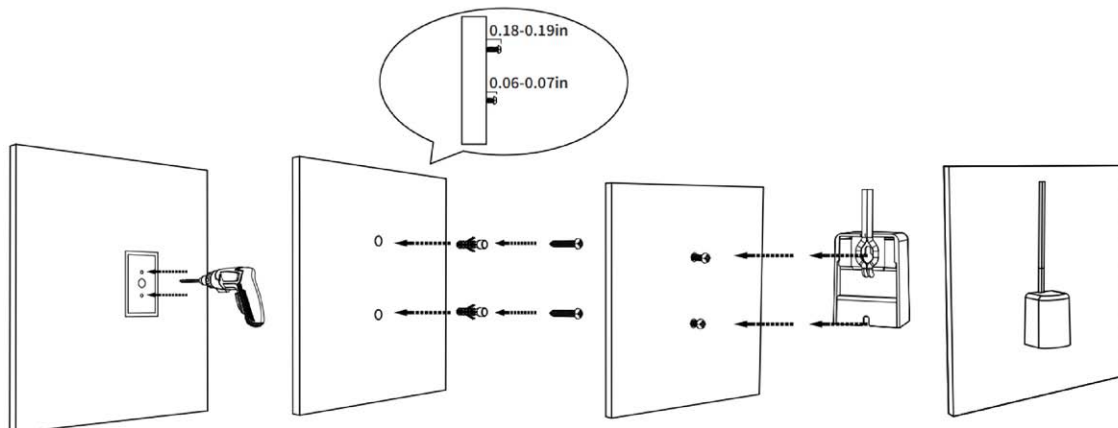

Type Two: Wiring comes out from the back of the fixture.

1. Using the mounting template provided, align and mark the screws and cable hole
2. Drill the appropriate holes for the building materials to which the fixture will be mounted. Pre-drill if needed.
3. Insert and thread in the anchors, then insert the screws.

Note: The screws should not be fully screwed in; they need to protrude above the mounting surface. (0.18- 0.19 inch for the top screw and 0.06- 0.07 inch for the bottom screw).

4. Pass the fixture cable through the larger center hole.
5. Hang the fixture on the screws.
6. Tighten the bottom screw until snug.
7. Connect the fixture wires to the main cable coming from the transformer.

