



The Wireless Gateway is a smart accessory that allows remote Cloud-Based control with Google Home or Alexa integration. **For use with Corona BT App, fixtures & devices only.**

FIAT LUX

- ☐ Phone-App Driven (IOS/Android)
- ☐ Wireless Connection Between Bluetooth Mesh to 2.4ghz/5ghz Wifi Network
- ☐ Supports All Fiat Lux Fixtures & Devices
- ☐ Advanced App Scheduling & Automations
- ☐ Connects to Alexa & Google Home
- ☐ Remote Lighting Control



CX-BTG-2

Available in:
BK- Black



Download the free 'Corona BT' App




GATEWAY FEATURES:

Material: High Impact Molded Plastic
Finish: BK- Black
Mounting: Surface or wall mounted
Ports: 1x USB-C (power)
Power Cable: USB-C/USB-A (w power brick)
Warranty: One Year Warranty

Network Specifications:

Connection: Dual Onboard Antennas
Frequency: 2.4GHZ / 5GHZ
Incoming: Low-Energy Bluetooth Mesh & BLE Long Range
Outgoing: IEEE 802.11 b/g/n Wifi
Max Connections: 128

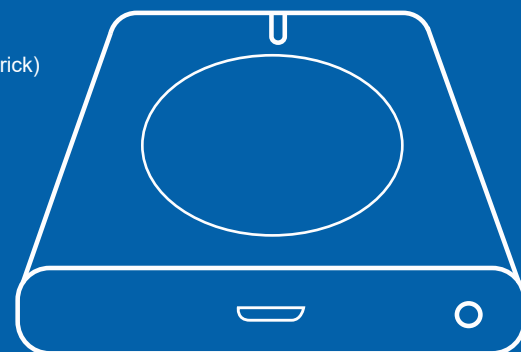

For videos, tutorials, and installation guides please visit:
coronalighting.com/url/btlearn





SCAN TO DOWNLOAD
(iOS / Android)



Step 1: Download the app

Search “**Corona BT**” on the APP store (IOS) for Apple Devices and on the GooglePlay Store for Android Devices. You may also scan the QR code on the right, to be directed to a download page.

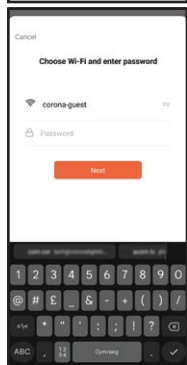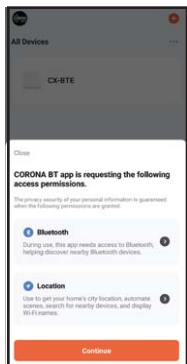

Step 2: Installing Your Gateway

A. Your CX-BTG-2 Gateway should be located inside and have a good 2.4GHZ or 5GHZ Wifi connection. It should also be 40-50 feet from a CX-BTE range extender or 20 feet from any BT fixture located outside, and the gateway must be on the lower-level of your home, if two-story. (For best BT reception, please setup near a window or door).

B. Next connect the USB power cord to your CX-BTG-2, and into a standard outlet with a power brick. Once powered, the indicator light should blink orange to be ready for pairing. The pairing mode will last for up to 15 minutes.

C. Ensure Bluetooth and Wifi are enabled on your Android or Apple device, and open the Corona BT app. **Tap the + on the upper right of the screen, then tap on add device.**

D. Your gateway should now be auto-discovered and prompt you for your **Wifi network & credentials**. Then, you will want to go into your gateway, and associate BLE sub devices to connect your Fiat Lux fixtures (see step 3 for more).

NOTE: You must have an active internet connection to complete this step.

Step 3: Adding Fixtures to Gateway

A. Before proceeding, ensure all the fixtures and devices are set up in the app and working.

B. Open CX-BTG-2 Gateway UI in the app. First tap **BLE Sub-Device**. Next tap, **Device Management**. Then in the sub menu, tap **Associate device**.

C. All available BT devices will populate. Tap the “**Select all**” radio-button in the upper right, then tap **Associate device**. Tap Confirm, when done and wait until adding equipment message is finished. Use the X in upper right to navigate back.

Note: If a BT fixture was associated to the Gateway and you remove or reset the fixture, you'll need to re-associate back to the Gateway.

Step 4: Reset the Gateway

A. Hold the button down in the back for 30 seconds.

B. After reboot, The LED indicator of the CX-BTG-2 will flash orange.

C. Repeat Step 2-C to add Gateway back into app and Step 3 to re-associate devices

