

# SPECIFICATION SHEET

## PRODUCT # : CL-398-BZ

•Rail Lights

• Aluminum

### Fixture Specifications:

**Light Bar Housing:** Cast aluminum. Removable bar for variety of uses.

**Finish:** BZ- Bronze.

**Lighting Source:** Integrated LED, five single cores, 2.5Watt, 140 Lumens, 3000 kelvin, 120° beam spread, 8-18 volt AC operating voltage, 20W Halogen equivalent, -4°F to +140°F ambient temperature.

**Wiring:** Fixture is prewired with a 10-ft 18-2 direct burial cord, pre-stripped for easy connection, wire connector sold separately. Universal connector (CX-839) and silicone filled wire nut (CX-854) are available from Corona Lighting.




**Mounting Bracket:** Stainless steel, glare shield, supplied with screws and anchor bolts. Breakoff corners for easy installation.

**Electrical Notes:** A remote 12V magnetic transformer is required, can be ordered from Corona Lighting, separately. Not for use with electronic transformer. Increasing voltage above 12 volts AC may decrease life of LED cores.

**Applications:** Retaining walls, Patios, Gazebos, Decks, Benches, Stairs, and Outdoors Living Spaces.

**Dimensions:** 7" X 3/4"

**Warranty:** 10 year warranty, with a rated life of 50,000 hours.

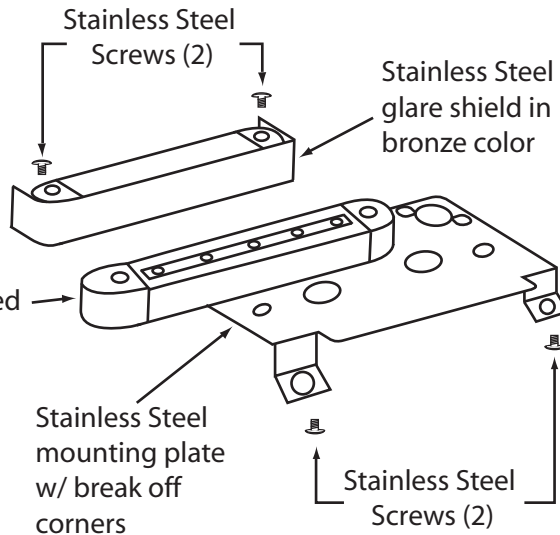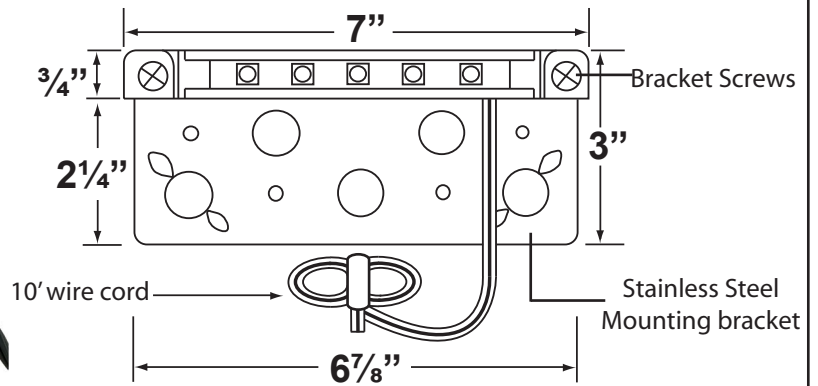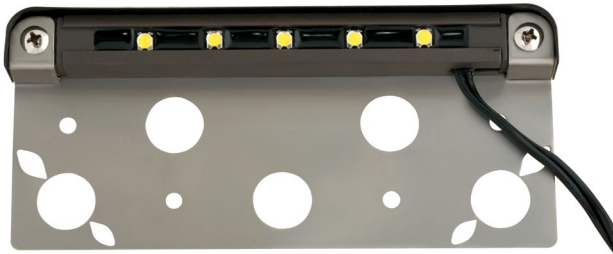

### JOB INFORMATION

TYPE: \_\_\_\_\_ DATE: \_\_\_\_\_  
 JOB NAME & ADDRESS: \_\_\_\_\_  
 PRODUCT #: \_\_\_\_\_  
 TOTAL QUANTITY: \_\_\_\_\_  
 LAMP TYPE & WATTAGE: \_\_\_\_\_  
 TRANSFORMER: \_\_\_\_\_  
 CONTRACTOR: \_\_\_\_\_  
 SPECIFIER: \_\_\_\_\_

## PRODUCT # : CL-398-BZ

•Rail Lights

•Aluminum

### Cable Connectors

- CX-854 Direct Burial Silicone Filled Wire Nut, **Tan**
- CX-858 Speedy Cable Connector, Supply Cable up to 10-2, **Black**
- CX-839 Universal cable connector, Supply cable up to 8-2, one/Pack **Black**

