


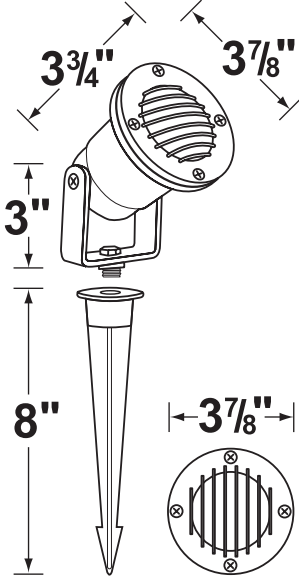



CL-513-SS		 <p style="text-align: center;">CL-512-SS</p>	 <p style="text-align: center;">LED AVAILABLE</p>  <p style="text-align: center;">CX-854 DIRECT BURIAL WIRENUT AVAILABLE</p>
Product Specification Sheet			
HOUSING:	Solid stainless steel.		
FINISH:	SS -Stainless Steel.		
LENS:	Clear, tempered, and heat resistant glass with silicone gasket. See accessories & parts for special effect lenses, honeycomb louver and frosted lens CX-380-FR.		
LAMP TYPE:	12V, MR-16 halogen, 35W max. See lamp guide for LED and color MR-16 lamps.		
MOUNTING:	Stainless steel yoke with 1/2" NPT male bushing mounted on stainless steel ground spike. Wire connector excluded. See accessories & parts for optional mounting hardware.		 <p style="text-align: center;">CORONA Lighting</p> <p style="text-align: center;">WWW.CORONALIGHTING.COM</p> <p style="text-align: center;">Tel: 800-727-9262 213-747-4500</p> <p style="text-align: center;">Fax: 800-727-9957 213-747-3234</p>
WIRING:	Fixture is prewired with a 3-foot pigtail of direct burial cable.		

- Fixture is supplied with 20W MR-16 lamp.
- Remote 12 Volt transformer is required.
- See transformers and accessories for variety of options and choices.