


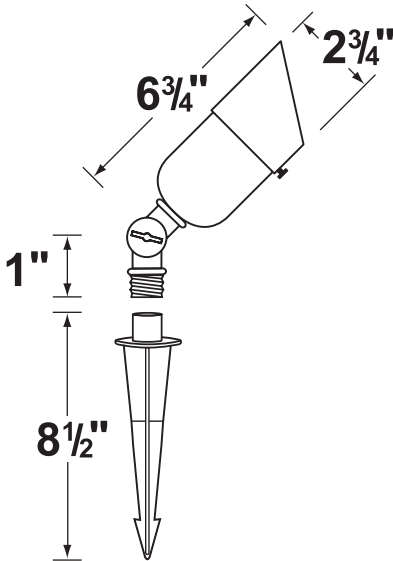



CL-521C-PC			 LED AVAILABLE
Product Specification Sheet			
HOUSING:	Solid copper. 360 degree rotatable shroud fitted to housing with silicone "O" ring gasket.	 CL-521C-PC	 CX-839 CORONA UNIVERSAL CONNECTOR AVAILABLE
FINISH:	PC -Polished Copper.		
LENS:	Clear, tempered, and heat resistant glass. See accessories & parts for special effect lenses and honeycomb louver.		
LAMP TYPE:	12V, MR-16 halogen, 35W max. See lamp guide for LED and color MR-16 lamps.		
MOUNTING:	Adjustable brass knuckle with 1/2" NPT, including ABS ground spike. Wire connector excluded. See accessories & parts for optional mounting hardware.		 WWW.CORONALIGHTING.COM Tel: 800-727-9262 213-747-4500 Fax: 800-727-9957 213-747-3234
WIRING:	Fixture is prewired with a 3-foot pigtail of direct burial cable.		

- Fixture is supplied with 20W MR-16 lamp.
- Remote 12 Volt transformer is required.
- See transformers and accessories for variety of options and choices.