

ARCHITECTURAL GRADE SERIES

SPECIFICATION SHEET

Gasket:

1633 Staunton Ave Los Angeles, CA 90021

(800) 727-9957 (800) 727-9262

(213) 747-3234 (213) 747-4500

E-Mail: sales@coronalighting.com

## PRODUCT #: CL-513-BR

Solid Brass

## **Fixture Specifications:**

Housing: Solid Brass.

Finish: **BR-Natural Brass.** 

Lens: Clear, tempered and heat resistant glass with

silicone gasket

Socket: Top grade ceramic bi-pin socket, with

Iretension clip.

12V, MR-16, 50W max. Lamp:

Available in LED (3.5W & 5W) or without lamp. See the Lamp Guide below for more information.

Wiring: Fixture is prewired with a 3ft 18-2 SPT2-W direct

> burial cord. Wire connector sold seperately. Universal connector (CX-839) and silicone filled wire nut (CX-854) are available from Corona Lighting.

Directional Lights

Silicone "O" ring seals face plate to housing,

providing weather tight protection.

Yoke: Brass yoke with 1/2" NPT bushing for

afixing mounting spike.

Mounting Spike: 8" brass mounting spike with 1/2" NPT

Electrical Notes: A remote 12V transformer is required. Options are


available from Corona Lighting.

Voltage range for LED lamps are 9V-17V. Proper grease/lubricant is suggested on threaded parts during installation process.

Warranty: Limited lifetime warranty on fixture housing against


manufacturer's defects.





3.5W and 5W





| AVAILABLE LED LANIPS (Corona LED lamps have a five (5) year limited warranty against manufacturer's defect | LE LED LAMPS (Corona LED lamps have a five (5) year limited warranty against manufacturer's defects) |
|--|--|
|--|--|

|  |       | BEAM           |       | COLOR & | RATED  | HALOGEN    |  |  |
|--|-------|----------------|-------|---------|--------|------------|--|--|
| LAMP NUMBER  | WATTS | SPREAD         | LUMEN | TEMP.   | HOURS  | EQUIVALENT |  |  |
| L-ED16-3W-SP   | 3.5   | 15° Spot       | 270   | 2700K   | 50,000 | 25 Watt    |  |  |
| L-ED16-3W-FL   | 3.5   | 45° Flood      | 270   | 2700K   | 50,000 | 25 Watt    |  |  |
| L-ED16-3W-WF   | 3.5   | 60° Wide Flood | 270   | 2700K   | 50,000 | 25 Watt    |  |  |
| L-ED16-5W-SP   | 5     | 15° Spot       | 350   | 2700K   | 50,000 | 40 Watt    |  |  |
| L-ED16-5W-FL   | 5     | 45° Flood      | 350   | 2700K   | 50,000 | 40 Watt    |  |  |
| L-ED16-5W-WF   | 5     | 60° Wide Flood | 350   | 2700K   | 50,000 | 40 Watt    |  |  |
| L-ED16-COB5W-SP  | 5     | 15° Spot       | 450   | 2700K   | 50,000 | 50 Watt    |  |  |
| L-ED16-COB5W-FL  | 5     | 38° Flood      | 450   | 2700K   | 50,000 | 50 Watt    |  |  |
| L-ED16-COB5W-WF  | 5     | 60° Wide Flood | 450   | 2700K   | 50,000 | 50 Watt    |  |  |
| L-ED16-COB5W-SP3K  | 5     | 15° Spot       | 470   | 3000K   | 50,000 | 50 Watt    |  |  |
| L-ED16-COB5W-FL3K  | 5     | 38° Flood      | 470   | 3000K   | 50,000 | 50 Watt    |  |  |
| L-ED16-COB5W-WF3K  | 5     | 60° Wide Flood | 470   | 3000K   | 50,000 | 50 Watt    |  |  |
| Single color MR-16 LED available in AMBER, BLUE, GREEN, PURPLE, RED and VIOLET |       |                |       |         |        |            |  |  |

#### JOB INFORMATION

TYPE: DATE:

**JOB NAME & ADDRESS:** 

PRODUCT #:

TOTAL QUANTITY:

LAMP TYPE & WATTAGE:

TRANSFORMER:

CONTRACTOR:

SPECIFIER:

•CL - product # wattage lamp angle CL - 513-BR - L-ED16 - 5W FL

Example: CL-513-BR-L-ED16-5W-FL

<sup>•</sup> When ordering LED lamp with a fixture your part number should follow the format below:

**ARCHITECTURAL GRADE SERIES** 

# **ACCESSORIES SHEET**

Directional Lights

1633 Staunton Ave Los Angeles, CA 90021

TEL. FAX. (800) 727-9262 (800) 727-9957 (213) 747-4500 (213) 747-3234

E-Mail: sales@coronalighting.com

Solid Brass

#### **Mounting Pedestals**

CX-601-BK 1" PVC Mounting Pedestal, ½" NPT, Black

PRODUCT #: CL-513-BR


CX-601-VG 1" PVC Mounting Pedestal, ½" NPT, Verde Green

CX-603-BK 3" PVC Mounting Pedestal, ½" NPT Female Brass Hub

on top, Black

CX-603-VG 3" PVC Mounting Pedestal, ½" NPT Female Brass Hub

on top, Verde Green



CX-604-BK 1" PVC Adjustable Mounting Pedestal, ½" NPT, **Black** 

CX-621-BK 1" PVC Cap, ½" NPT, **Black** 

CX-621-VG 1" PVC Cap, ½" NPT, Verde Green

CX-622-BK 2" PVC Cap, ½" NPT, Black

CX-622-VG 2" PVC Cap, ½" NPT, Verde Green

CX-624-BK 3" PVC Cap, 1/2" NPT Female Brass Hub, Black

CX-624-VG  $\,$  3" PVC Cap,  $\frac{1}{2}$ " NPT Female Brass Hub, **Verde Green** 


#### **Ground Spikes**

CX-646-BR 8" ABS Spike, ½" NPT, Natural Brass



#### **Mounting Canopies**

CX-705B-BR Brass Flat Canopy, ½ NPT, **Natural Brass**CX-709B-BR Brass Raised Canopy, ½ NPT, **Natural Brass** 

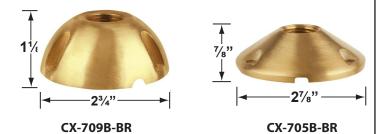

### Special Lenses & Honeycomb Louvers

CX-238 MR-16 Snap-on holder, Silver Plated CX-239 MR-16 honeycomb louver, Black CX-240-AM MR-16 color lens, Amber CX-240-BL MR-16 color lens. Blue CX-240-GR MR-16 color lens, Green CX-240-RD MR-16 color lens, Red CX-240-YL MR-16 color lens, Yellow CX-241 MR-16 lens, Linear Spread CX-242 MR-16 lens, Frosted

CX-243 MR-16 lens, **Prismatic** 

• For MR-16 Lenses and Louvers, you will need the CX-238



#### **Cable Connectors**

CX-854 Direct Burial Silicone Filled Wire Nut, Tan
CX-858 Speedy Cable Connector, Supply Cable up to 10-2, Black
CX-839 Universal cable connector, Supply cable up to 8-2,

one/Pack Black

