

SPECIFICATION SHEET

 1633 Staunton Ave

 Los Angeles, CA
 90021

 TEL.
 FAX.

 (800) 727-9262
 (800) 727-9957

 (213) 747-4500
 (213) 747-3234

E-Mail: sales@coronalighting.com


1

		: Cl	L-717E	3-AB		•Path L	lights			• Solid	Diass
Fixture	Specific	catio	ns:								
Housing:	 Corrosion resistant Solid Brass "L" shaped design 					Wiring:		Fixture is prev	wired with a 3ft.	, 18-2 direct buria	al cord
Stem:		Solid brass pipe with ½" NPT on bottom			5		Wire connector sold seperately. Universal connector (CX-839) and silicone filled wire nut (CX-854) are			nnecto	
Finish:		AB- Antique Bronze. Natural toning process. AB finish will vary due to artistic process. Also in GM, and SI finishes. Aluminum options available in BK and BZ						available from Corona Lighting.			
	AB finish wi Also in GM ,						ng Spike:	Standard injection molded spike with ½" NPT thread female hub.			
Lens:		High impact, sandblasted, heat resistant clear glass. Extra frosted and linear lenses included.					al Notes:	A remote 12V transformer is required. Options are available from Corona Lighting. Voltage range for LED lamps are 8V-21V.		s are	
Socket:		Top grade fixed ceramic bi-pin socket. Easy tool-free lamp access.						Proper grease/lubricant is suggested on threaded parts during installation process.			
Lamp:	Designed to use a 12V, T3 LED lamp only. Available in LED (2W & 2.5W) or without lamp. See the Lamp Guide below for more information. Not to be used with halogen/xenon lamps.					Warranty:		Limited lifetime warranty on fixture housing against manufacturer's defects.			
VAILABLI	E LED LAMF	PS (Coror				nty against man	ufacturer's defec	·			
AMP NUMBE		PS (Coror MATTS	na LED lamps ha BEA SPREAD							DATE:	
. AMP NUMBE -EDT3-2W	R W	2	BEA SPREAD 360°	LUMEN 200	ar limited warran COLOR & TEMP. 2700K	nty against man RATED HOURS 25,000	ufacturer's defec HALOGEN EQUIVALEN 20 Watt			DATE:	
AMP NUMBE -EDT3-2W -EDT3-2.5W -EDT3-2W-3	e r W V 3K	2 2.5 2	BEA SPREAD 360° 180° 360°	LUMEN 200 240 210	ar limited warran COLOR & TEMP. 2700K 2700K 3000K	nty against manu RATED HOURS 25,000 25,000 25,000	ufacturer's defect HALOGEN EQUIVALEN 20 Watt 35 Watt 20 Watt			DATE:	
EDT3-2W EDT3-2.5W EDT3-2.5W EDT3-2.5W	e r W V 3K V-3K	2 2.5	BEA SPREAD 360° 180°	AM LUMEN 200 240	ar limited warran _ COLOR & _ TEMP. _ 2700K _ 2700K	nty against man RATED HOURS 25,000 25,000	ufacturer's defect HALOGEN EQUIVALEN 20 Watt 35 Watt		ORMATION	DATE:	
AMP NUMBE -EDT3-2W -EDT3-2.5W -EDT3-2W-3 -EDT3-2.5W -EDT3-AM*	E R W V 3K V-3K	2 2.5 2.5 2.5	BEA SPREAD 360° 180° 360° 180°	LUMEN 200 240 210 250	ar limited warran COLOR & TEMP. 2700K 2700K 3000K 3000K	nty against manu RATED HOURS 25,000 25,000 25,000 25,000	ufacturer's defect HALOGEN EQUIVALEN 20 Watt 35 Watt 20 Watt 35 Watt	(ts) JOB INF T TYPE: JOB NAME	ORMATION E & ADDRESS: #:	DATE:	
AMP NUMBE -EDT3-2W -EDT3-2.5W -EDT3-2W-3 -EDT3-2.5W -EDT3-AM*	E R W V 3K V-3K	2 2.5 2 2.5 2.5 2	BEA SPREAD 360° 180° 360° 360° 360° 360°	AM LUMEN 200 240 210 250 170	ar limited warran COLOR & TEMP. 2700K 2700K 3000K 3000K	nty against manu RATED HOURS 25,000 25,000 25,000 25,000	ufacturer's defect HALOGEN EQUIVALEN 20 Watt 35 Watt 20 Watt 35 Watt	TYPE: JOB NAME PRODUCT TOTAL QU	ORMATION E & ADDRESS: #:	DATE:	
AMP NUMBE -EDT3-2W -EDT3-2.5W -EDT3-2W-3 -EDT3-2.5W -EDT3-AM*	ER W V 3K V-3K V-3K	2 2.5 2 2.5 2.5 2	BEA SPREAD 360° 180° 360° 360° 360° 360°	AM LUMEN 200 240 210 250 170	ar limited warran COLOR & TEMP. 2700K 2700K 3000K 3000K	nty against manu RATED HOURS 25,000 25,000 25,000 25,000	ufacturer's defect HALOGEN EQUIVALEN 20 Watt 35 Watt 20 Watt 35 Watt	(ts) JOB INF T TYPE: JOB NAME PRODUCT TOTAL QU/ LAMP TYPI	ORMATION E & ADDRESS: #: ANTITY: E & WATTAGE:	DATE:	
-EDT3-2W -EDT3-2.5W -EDT3-2.5W -EDT3-2W-3 -EDT3-2.5W -EDT3-AM*	ER W V 3K V-3K V-3K	2 2.5 2 2.5 2.5 2	BEA SPREAD 360° 180° 360° 360° 360° 360°	AM LUMEN 200 240 210 250 170	ar limited warran COLOR & TEMP. 2700K 2700K 3000K 3000K	nty against manu RATED HOURS 25,000 25,000 25,000 25,000	ufacturer's defect HALOGEN EQUIVALEN 20 Watt 35 Watt 20 Watt 35 Watt	TYPE: JOB NAME PRODUCT TOTAL QU/ LAMP TYPE	ORMATION	DATE:	
AMP NUMBE -EDT3-2W -EDT3-2.5W -EDT3-2W-3 -EDT3-2.5W -EDT3-AM*	ER W V 3K V-3K V-3K	2 2.5 2 2.5 2.5 2	BEA SPREAD 360° 180° 360° 360° 360° 360°	AM LUMEN 200 240 210 250 170	ar limited warran COLOR & TEMP. 2700K 2700K 3000K 3000K	nty against manu RATED HOURS 25,000 25,000 25,000 25,000	ufacturer's defect HALOGEN EQUIVALEN 20 Watt 35 Watt 20 Watt 35 Watt	(ts) JOB INF T TYPE: JOB NAME PRODUCT TOTAL QU/ LAMP TYPI	CRMATION CRMATION E & ADDRESS: #: ANTITY: E & WATTAGE: RMER: TOR:	DATE:	

• CL - product # - lamp - wattage CL - 717B-AB - L-EDT3 - 2W-3K

Example: CL-717B-AB-L-EDT3-2W-3K

• Corona Lighting reserves the right to make any change and/or improvement to the design and construction of this fixure without further notification.

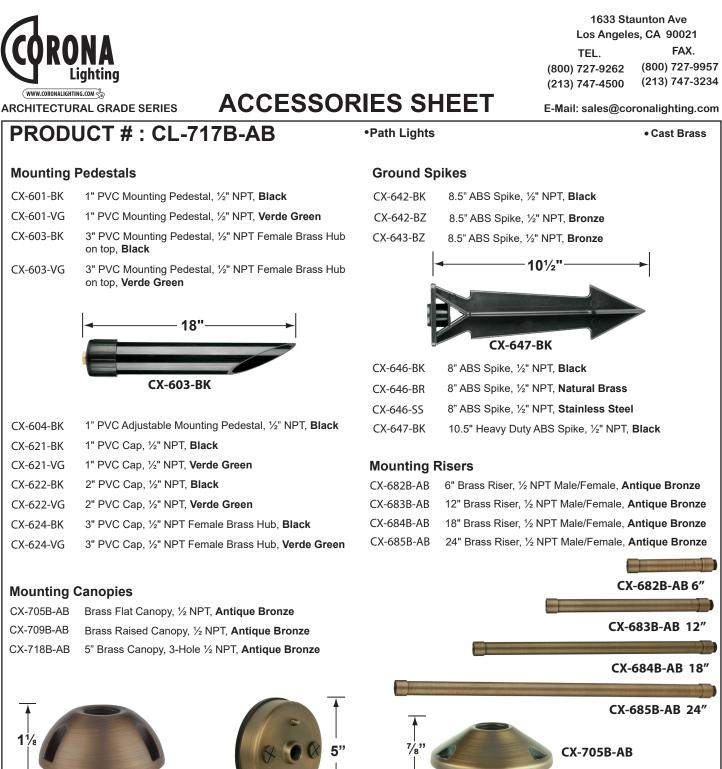

·2³/4" CX-709B-AB



Cable Connectors

CX-854	Direct Burial Silicone Filled Wire Nut, Tan
CX-858	Speedy Cable Connector, Supply Cable up to 10-2, Black
CX-839	Universal cable connector, Supply cable up to 8-2, one/Pack Black

CX-854

3/4"

15/8"

27/8"