


CL-222-GM

SPECIFICATION SHEETS

Fixture Configurations

Well Light	2
Step Light	3
Underwater Light	4

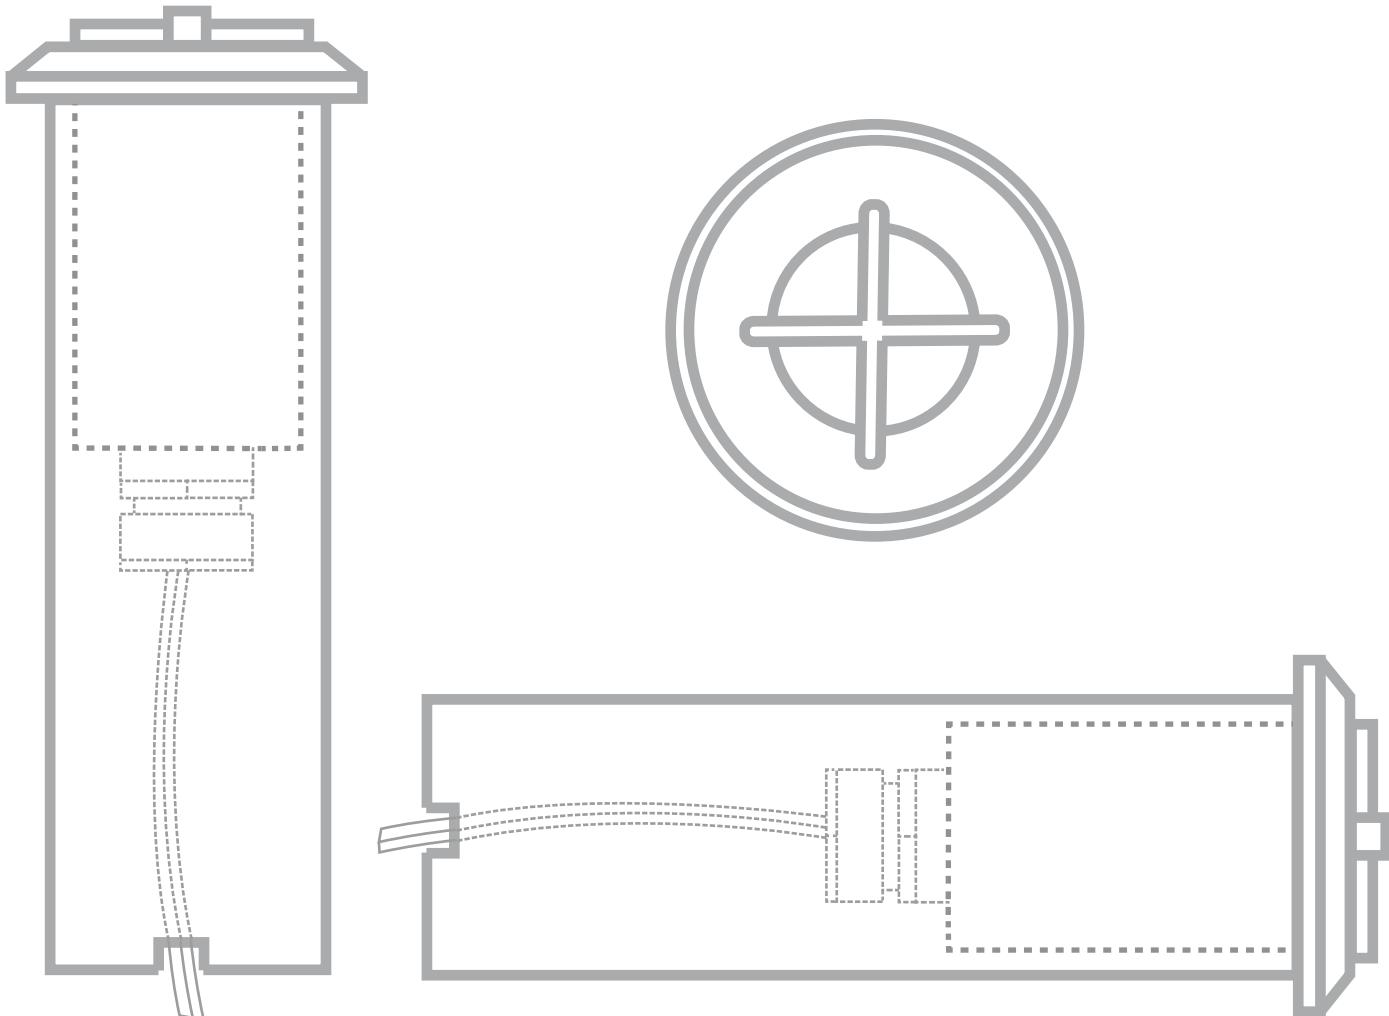

SPECIFICATION SHEET

PRODUCT # : CL-222-GM

• Well Light

• Cast Brass

Fixture Specifications:

Housing: Heavy duty corrosion resistant cast brass with PVC sleeve.

Faceplate: Cast brass cross shape, fitted to housing with silicone "O" ring gasket.

Finish: **GM- Gun Metal** Natural toning process. GM finish will vary due to artistic process. Also in **AB- Antique Bronze**, or **SI- Silver** plated.

Lens: Clear and heat resistant tempered flat glass.

Lighting Source: Integrated CREE LED module, 3 watt, 210 lumens 120° beam spread, 3000K, 20W halogen equivalent. Rated hours: 30,000.

Wiring: Fixture is prewired with a 18-2 20ft SPT-1W direct burial cord, pre-stripped for easy connection. Wire connector sold separately. Silicone filled wire nut (**CX-854**) is available from Corona Lighting.

Gasket:

Silicone "O" ring, seals faceplate to housing, providing weather tight protection.

Mounting:

Recessed flush mount. In-ground direct burial or concrete encasement install. Best used in concrete, brick, or other masonry surfaces.

Electrical Notes:

Integrated CREE LED module is dimmable. A remote 12V magnetic transformer is required. Options are available from Corona Lighting. Not for use with electronic transformers.

Voltage range for LED module is 8-18 Volt AC.


Ambient Temperature: -49°F to 104°F. CRI: Ra > 80 Proper grease/lubricant is suggested on threaded parts during installation process.

Applications:

Best used for up lighting, grazing, or backlighting. Install any place where a tiny recessed fixture may fit.

Warranty:

Limited lifetime warranty on fixture housing and faceplate against manufacturer's defects. Ten (10) year warranty on LED modules and components.

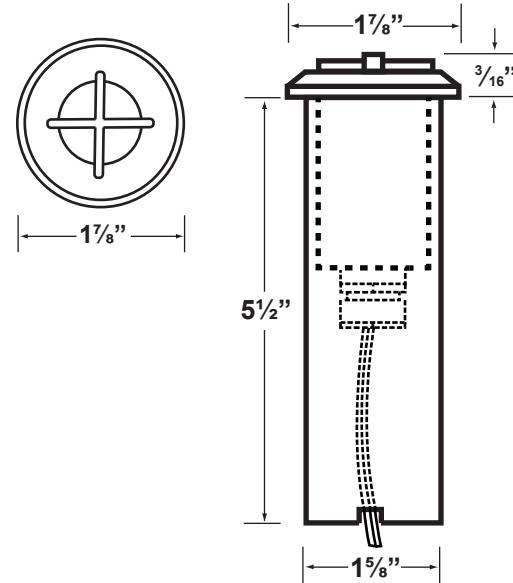

DESIGNER COLOR LENSES INCLUDED WITH THIS FIXTURE:



Frosted




Green



Red



Amber



Yellow



Purple



Blue

JOB INFORMATION

TYPE:

DATE:

JOB NAME & ADDRESS:

PRODUCT #:

TOTAL QUANTITY:

LAMP TYPE & WATTAGE:

TRANSFORMER:

CONTRACTOR:

SPECIFIER:

NOTE: Install additional O-ring (supplied) when color lenses are used.

SPECIFICATION SHEET

 1633 Staunton Ave
 Los Angeles, CA 90021

TEL. FAX.

(800) 727-9262 (800) 727-9957

(213) 747-4500

(213) 747-3234

 E-Mail: sales@coronalighting.com

PRODUCT # : CL-222-GM

•Step Light

•Cast Brass

Fixture Specifications:

Housing: Heavy duty corrosion resistant cast brass with PVC sleeve.

Faceplate: Cast brass cross shape, fitted to housing with silicone "O" ring gasket.

Finish: **GM- Gun Metal** Natural toning process. GM finish will vary due to artistic process. Also in **AB- Antique Bronze**, or **SI- Silver** plated.

Lens: Clear and heat resistant tempered flat glass.

Lighting Source: Integrated CREE LED module, 3 watt, 210 lumens 120° beam spread, 3000K, 20W halogen equivalent. Rated hours: 30,000.

Wiring: Fixture is prewired with a 18-2 20ft SPT-1W direct burial cord, pre-stripped for easy connection. Wire connector sold separately. Silicone filled wire nut (**CX-854**) is available from Corona Lighting.

Gasket: Silicone "O" ring, seals faceplate to housing, providing weather tight protection.

Mounting:

Recessed flush mount. Best used in concrete, brick, or other masonry surfaces.

Electrical Notes: Integrated CREE LED module is dimmable. A remote 12V magnetic transformer is required. Options are available from Corona Lighting. Not for use with electronic transformers.

Voltage range for LED module is 8-18 Volt AC.

Ambient Temperture: -4°F to 104°F. CRI: Ra > 80


Proper grease/lubricant is suggested on threaded parts during installation process.

Applications:

Seat walls, steps, stairs, decking, entry columns, outdoor living spaces, gazebos, or any place where a tiny recessed fixture may fit.

Warranty:

Limited lifetime warranty on fixture housing and faceplate against manufacturer's defects. Ten (10) year warranty on LED modules and components.

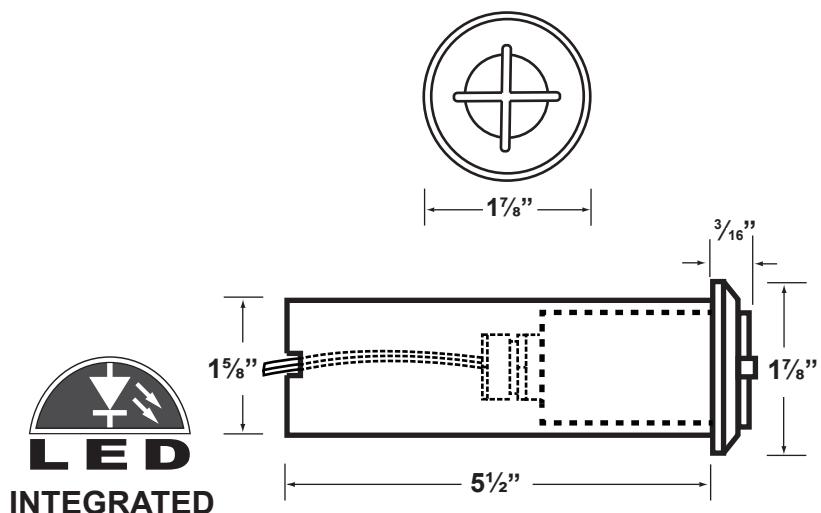

DESIGNER COLOR LENSES INCLUDED WITH THIS FIXTURE:



Frosted



Green



Red



Amber



Yellow



Purple



Blue

JOB INFORMATION

TYPE: DATE:

JOB NAME & ADDRESS:

PRODUCT #:

TOTAL QUANTITY:

LAMP TYPE & WATTAGE:

TRANSFORMER:

CONTRACTOR:

SPECIFIER:

NOTE: Install additional O-ring (supplied) when color lenses are used.

• Corona Lighting reserves the right to make any change and/or improvement to the design and construction of this fixture without further notification.



www.coronalighting.com
ARCHITECTURAL GRADE SERIES

SPECIFICATION SHEET

PRODUCT # : CL-222-GM

• Underwater Light

• Cast Brass

Fixture Specifications:

Housing: Heavy duty corrosion resistant cast brass with PVC sleeve.

Faceplate: Cast brass cross shape, fitted to housing with silicone "O" ring gasket.

Finish: **GM- Gun Metal** Natural toning process. GM finish will vary due to artistic process. Also in **AB- Antique Bronze**, or **SI- Silver** plated.

Lens: Clear and heat resistant tempered flat glass.

Lighting Source: Integrated CREE LED module, 3 watt, 210 lumens 120° beam spread, 3000K, 20W halogen equivalent. Rated hours: 30,000.

Wiring: Fixture is prewired with a 18-2 20ft SPT-1W direct burial cord, pre-stripped for easy connection.

Gasket: Silicone "O" ring, seals faceplate to housing, providing weather tight protection.

Mounting: Recessed flush mount.

Electrical Notes: Integrated CREE LED module is dimmable. A remote 12V magnetic transformer is required. Options are available from Corona Lighting. Not for use with electronic transformers.

Voltage range for LED module is 8-18 Volt AC.


Ambient Temperture: -4°F to 104°F. CRI: Ra > 80

Proper grease/lubricant is suggested on threaded parts during installation process.

Applications: Fountains, water features, ponds, waterfalls, garden pools, or any place where a tiny recessed fixture may fit.

Only to be used in fresh water. **DO NOT** install in swimming pools, lakes, or spas.

Warranty: Limited lifetime warranty on fixture housing and faceplate against manufacturer's defects. Ten (10) year warranty on LED modules and components.

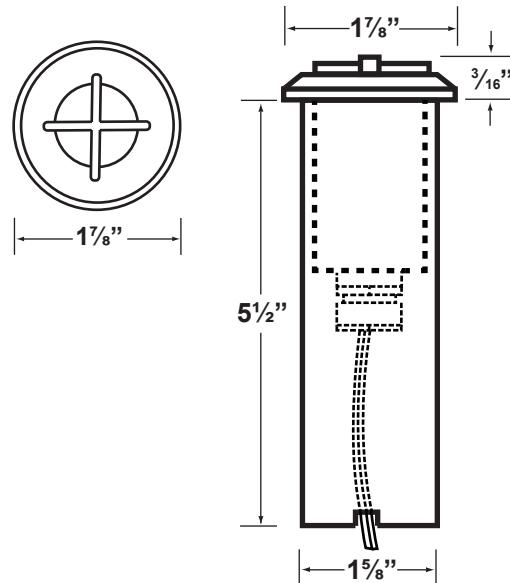

DESIGNER COLOR LENSES INCLUDED WITH THIS FIXTURE:



Frosted



Green



Red



Amber



Yellow



Purple



Blue

JOB INFORMATION

TYPE:

DATE:

JOB NAME & ADDRESS:

PRODUCT #:

TOTAL QUANTITY:

LAMP TYPE & WATTAGE:

TRANSFORMER:

CONTRACTOR:

SPECIFIER:

NOTE: Install additional O-ring (supplied) when color lenses are used.

• Corona Lighting reserves the right to make any change and/or improvement to the design and construction of this fixture without further notification.