


# CL-222-SI

## SPECIFICATION SHEETS

---

## Fixture Configurations

Well Light .....	2
Step Light .....	3
Underwater Light .....	4

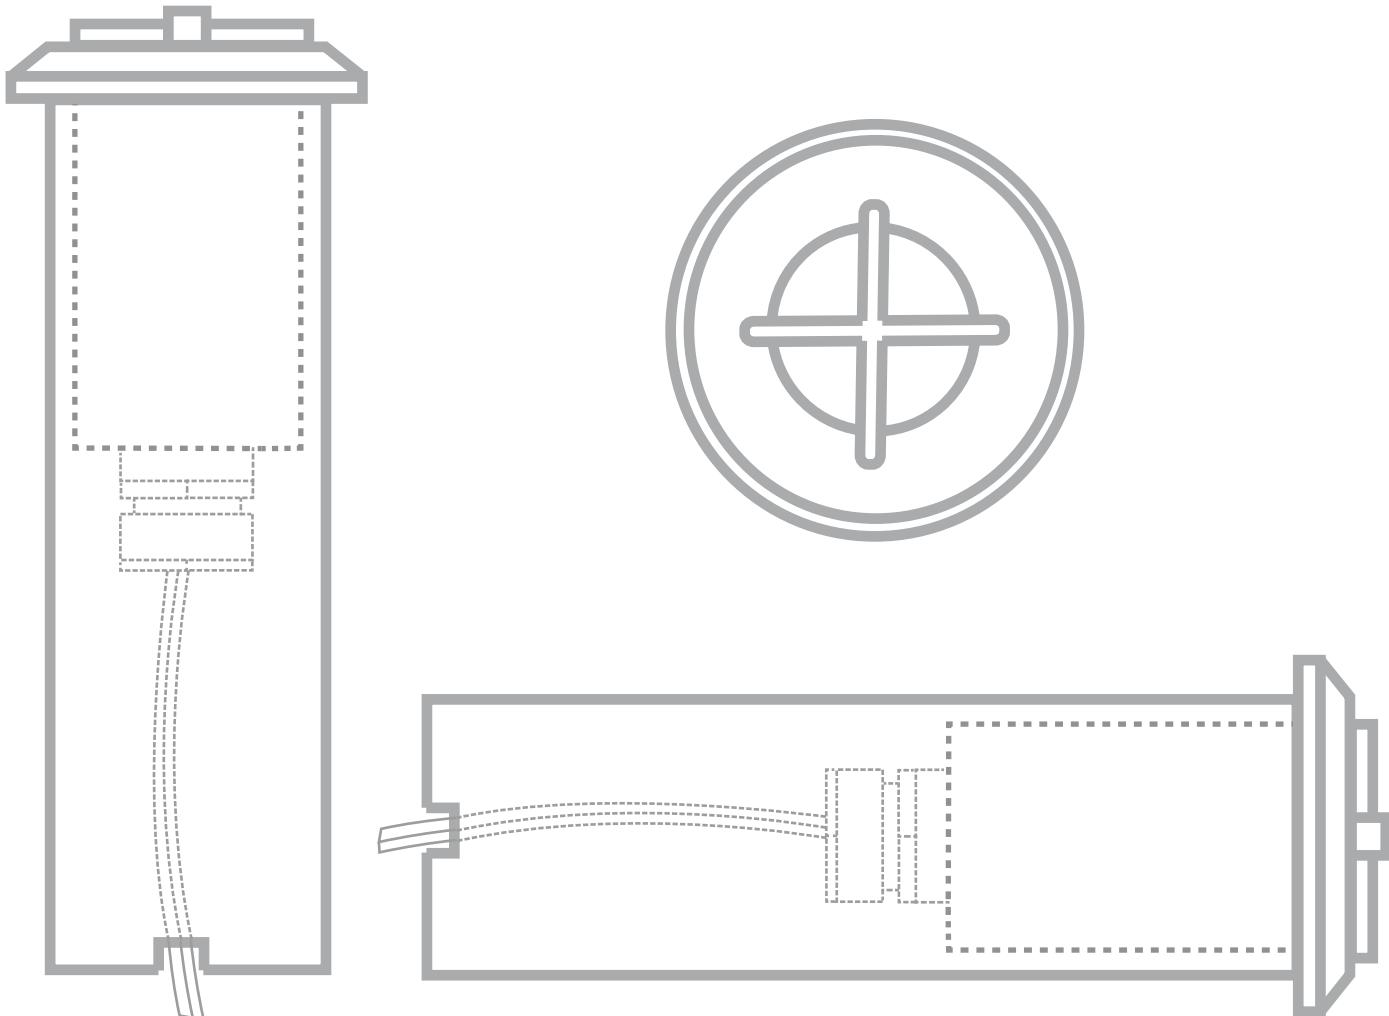

## PRODUCT # : CL-222-SI

• Well Light

• Cast Brass

### Fixture Specifications:

**Housing:** Heavy duty corrosion resistant cast brass with PVC sleeve.

**Faceplate:** Cast brass cross shape, fitted to housing with silicone "O" ring gasket.

**Finish:** **SI- Silver plated.** Natural toning process.  
**AB- Antique Bronze, or GM- Gun Metal available.**

**Lens:** Clear and heat resistant tempered flat glass.

**Lighting Source:** Integrated CREE LED module, 3 watt, 210 lumens 120° beam spread, 3000K, 20W halogen equivalent. Rated hours: 30,000.

**Wiring:** Fixture is prewired with a 18-2 20ft SPT-1W direct burial cord, pre-stripped for easy connection. Wire connector sold separately. Silicone filled wire nut (**CX-854**) is available from Corona Lighting.

**Gasket:**

Silicone "O" ring, seals faceplate to housing, providing weather tight protection.

**Mounting:**

Recessed flush mount. In-ground direct burial or concrete encasement install. Best used in concrete, brick, or other masonry surfaces.

**Electrical Notes:** Integrated CREE LED module is dimmable. A remote 12V magnetic transformer is required. Options are available from Corona Lighting. Not for use with electronic transformers.

Voltage range for LED module is 8-18 Volt AC.


Ambient Temperature: -49°F to 104°F. CRI: Ra > 80 Proper grease/lubricant is suggested on threaded parts during installation process.

**Applications:**

Best used for up lighting, grazing, or backlighting. Install any place where a tiny recessed fixture may fit.

**Warranty:**

Limited lifetime warranty on fixture housing and faceplate against manufacturer's defects. Ten (10) year warranty on LED modules and components.

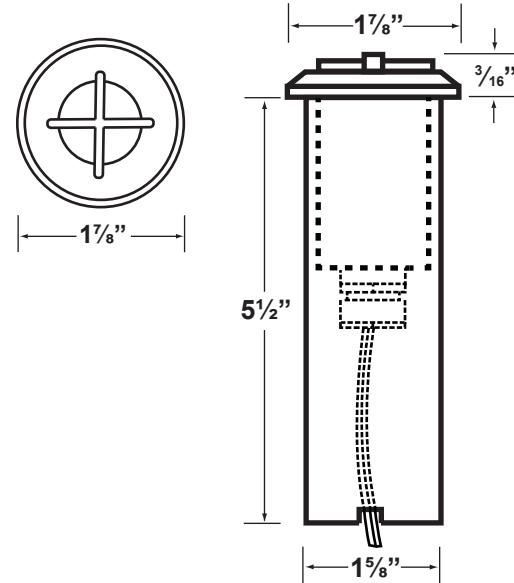

### DESIGNER COLOR LENSES INCLUDED WITH THIS FIXTURE:



Frosted



Green



Red



Amber



Yellow



Purple



Blue

### JOB INFORMATION

TYPE:

DATE:

JOB NAME & ADDRESS:

PRODUCT #:

TOTAL QUANTITY:

LAMP TYPE & WATTAGE:

TRANSFORMER:

CONTRACTOR:

SPECIFIER:

**NOTE:** Install additional O-ring (supplied) when color lenses are used.



WWW.CORONALIGHTING.COM

ARCHITECTURAL GRADE SERIES

# SPECIFICATION SHEET

PRODUCT # : CL-222-SI

• Step Light

• Cast Brass

## Fixture Specifications:

**Housing:** Heavy duty corrosion resistant cast brass with PVC sleeve.

**Faceplate:** Cast brass cross shape, fitted to housing with silicone "O" ring gasket.

**Finish:** **SI- Silver plated.** Natural toning process.  
**AB- Antique Bronze,** or **GM- Gun Metal** available.

**Lens:** Clear and heat resistant tempered flat glass.

**Lighting Source:** Integrated CREE LED module, 3 watt, 210 lumens 120° beam spread, 3000K, 20W halogen equivalent. Rated hours: 30,000.

**Wiring:** Fixture is prewired with a 18-2 20ft SPT-1W direct burial cord, pre-stripped for easy connection. Wire connector sold separately. Silicone filled wire nut (**CX-854**) is available from Corona Lighting.

**Gasket:** Silicone "O" ring, seals faceplate to housing, providing weather tight protection.

**Mounting:**

Recessed flush mount. Best used in concrete, brick, or other masonry surfaces.

**Electrical Notes:** Integrated CREE LED module is dimmable. A remote 12V magnetic transformer is required. Options are available from Corona Lighting. Not for use with electronic transformers.

Voltage range for LED module is 8-18 Volt AC.

Ambient Temperature: -4°F to 104°F. CRI: Ra > 80


Proper grease/lubricant is suggested on threaded parts during installation process.

**Applications:**

Seat walls, steps, stairs, decking, entry columns, outdoor living spaces, gazebos, or any place where a tiny recessed fixture may fit.

**Warranty:**

Limited lifetime warranty on fixture housing and faceplate against manufacturer's defects. Ten (10) year warranty on LED modules and components.

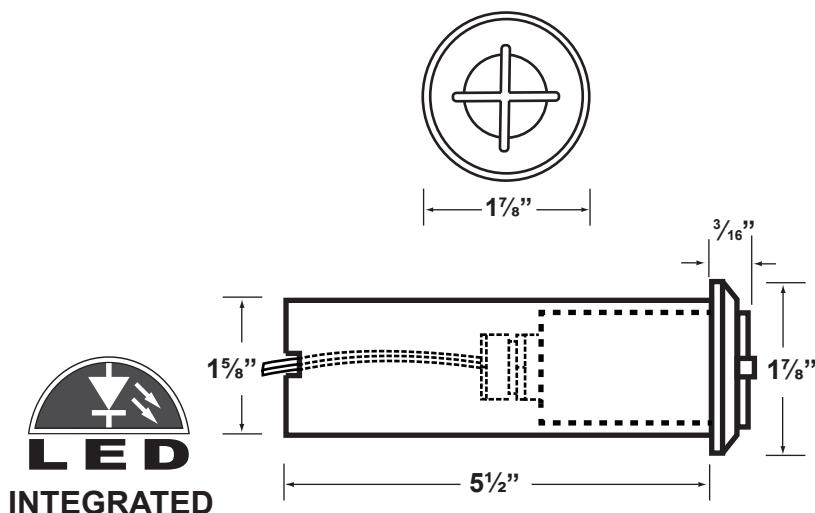

## DESIGNER COLOR LENSES INCLUDED WITH THIS FIXTURE:



Frosted



Green



Red



Amber



Yellow



Purple



Blue

## JOB INFORMATION

TYPE: DATE:

JOB NAME & ADDRESS:

PRODUCT #:

TOTAL QUANTITY:

LAMP TYPE & WATTAGE:

TRANSFORMER:

CONTRACTOR:

SPECIFIER:

NOTE: Install additional O-ring (supplied) when color lenses are used.

• Corona Lighting reserves the right to make any change and/or improvement to the design and construction of this fixture without further notification.



www.coronalighting.com  
ARCHITECTURAL GRADE SERIES

# SPECIFICATION SHEET

PRODUCT # : CL-222-SI

• Underwater Light

• Cast Brass

## Fixture Specifications:

**Housing:** Heavy duty corrosion resistant cast brass with PVC sleeve.

**Faceplate:** Cast brass cross shape, fitted to housing with silicone "O" ring gasket.

**Finish:** **SI- Silver plated.** Natural toning process.  
**AB- Antique Bronze,** or **GM- Gun Metal** available.

**Lens:** Clear and heat resistant tempered flat glass.

**Lighting Source:** Integrated CREE LED module, 3 watt, 210 lumens 120° beam spread, 3000K, 20W halogen equivalent. Rated hours: 30,000.

**Wiring:** Fixture is prewired with a 18-2 20ft SPT-1W direct burial cord, pre-stripped for easy connection.

**Gasket:** Silicone "O" ring, seals faceplate to housing, providing weather tight protection.

**Mounting:** Recessed flush mount.

**Electrical Notes:** Integrated CREE LED module is dimmable. A remote 12V magnetic transformer is required. Options are available from Corona Lighting. Not for use with electronic transformers.

Voltage range for LED module is 8-18 Volt AC.


Ambient Temperture: -4°F to 104°F. CRI: Ra > 80

Proper grease/lubricant is suggested on threaded parts during installation process.

**Applications:** Fountains, water features, ponds, waterfalls, garden pools, or any place where a tiny recessed fixture may fit.

Only to be used in fresh water. **DO NOT** install in swimming pools, lakes, or spas.

**Warranty:** Limited lifetime warranty on fixture housing and faceplate against manufacturer's defects. Ten (10) year warranty on LED modules and components.

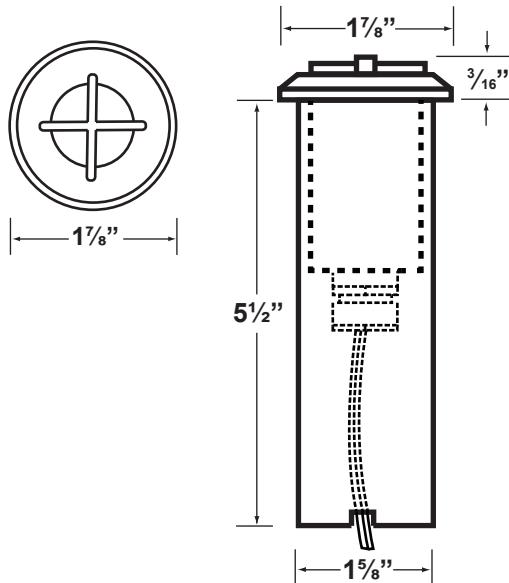

## DESIGNER COLOR LENSES INCLUDED WITH THIS FIXTURE:



Frosted



Green



Red



Amber



Yellow



Purple



Blue

## JOB INFORMATION

TYPE:

DATE:

JOB NAME & ADDRESS:

PRODUCT #:

TOTAL QUANTITY:

LAMP TYPE & WATTAGE:

TRANSFORMER:

CONTRACTOR:

SPECIFIER:

NOTE: Install additional O-ring (supplied) when color lenses are used.

• Corona Lighting reserves the right to make any change and/or improvement to the design and construction of this fixture without further notification.