

PRODUCT # : CL-335-AB

• Well Light

• Cast Brass Faceplate

Fixture Specifications:

Housing: Stainless steel adjustable fixture, suspended inside a reversible PVC sleeve with both flat and angle-cut, options on either end.

Faceplate: Diecast brass louver-designed plate, tightened over housing. Drive-Over rated up to 3,000 LBS.

Finish: **AB- Antique Bronze**, faceplate
Natural toning process. AB finish may vary due to artistic process

Lens: None.

Socket: Top grade adjustable (25° tilt), ceramic screw-in terminal

Lamp: 12V, PAR36 LED
Available in 15W Bluetooth mesh smart RGB-WW, or CCT; 5 / 10 / 15W (adjustable), 6W economy LED or without lamp. See Lamp Guide below for more information.

Wiring: Fixture is prewired with a 5ft 18-2 SJT-W direct burial cord. Wire connector sold separately. Quick-locking connectors (**CX-LOC**) are available from Corona Lighting, see page 2 for details.


Mounting: In-ground direct burial or concrete encasement. Use gravel for proper drainage. Angle-cut end required when installed 3" above ground surface.

Electrical Notes: A remote 12V transformer is required. Options are available from Corona Lighting. Voltage range for lamps are 9V-17V. Proper grease/lubricant is suggested on threaded parts during installation process.

Warranty: Limited lifetime warranty on fixture only, against manufacturer's defects.



**DRIVE-OVER RATED
UP TO 3,000LBS**

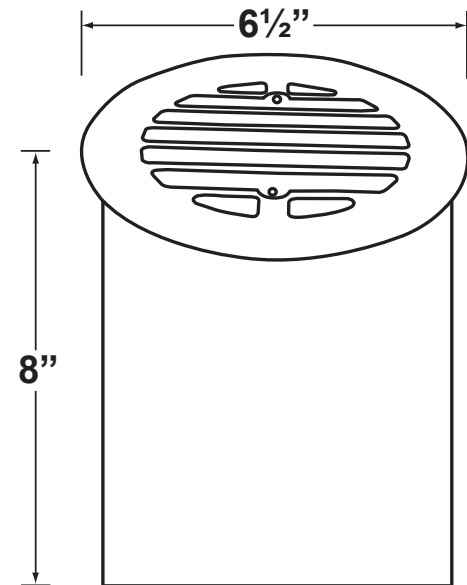

AVAILABLE LED LAMPS

LAMP NUMBER	WATTS	BEAM		COLOR & TEMP.	RATED HOURS	HALOGEN EQUIVALENT
		SPREAD	LUMEN			
Premium LED Lamps (Premium LED lamps have a five (5) year limited warranty against manufacturer's defects)						
L-ED36-15W-BT 	1-15	15° / 38° / 60° / 100°	25-1200	2200K-5700K	50,000	100W
L-ED36-15W-CCT 	0.2-15	15° / 38° / 60° / 100°	25-1200	2200K-5700K	50,000	100W
L-ED36-15W-ADJ	Push Button Adjustable Modes below:					
5W-Mode	5	15° / 38° / 60° / 100°	450	2700K / 3000K	50,000	40W
10W- Mode	10	15° / 38° / 60° / 100°	800	2700K / 3000K	50,000	75W
15W- Mode	15	15° / 38° / 60° / 100°	1200	2700K / 3000K	50,000	100W
Economy LED Lamps (Economy LED lamps have a three (3) year limited warranty against manufacturer's defects)						
L-ED36-6WEC-FL	6	38°	630	2700K	50,000	35W
L-ED36-6WEC-FL-3K	6	38°	700	3000K	50,000	35W

* -Bluetooth connection -Color changing

For more additional Lamps, and accessories visit Coronalighting.com

JOB INFORMATION

TYPE: DATE:

JOB NAME & ADDRESS:

PRODUCT #:

TOTAL QUANTITY:

LAMP TYPE & WATTAGE:

TRANSFORMER:

CONTRACTOR:

SPECIFIER:

• When ordering LED lamp with a fixture your part number should follow the format below:

• CL - product # - lamp - wattage - lamp angle

CL - 335-AB - L-ED36 - 6WEC - FL

Example: CL-335-AB-L-ED36-6WEC-FL

• Corona Lighting reserves the right to make any change and/or improvement to the design and construction of this fixture without further notification.

ARCHITECTURAL GRADE SERIES

ACCESSORIES SHEET

PRODUCT # : CL-335-AB

• Well Lights

• Cast Brass Faceplate

Stainless Steel Pool and Spa Rated Transformers

T-LTF60	60W, 12V, Compact Mini Transformer
T-LT75	75W, 12 and 15V, Single Circuit Transformer w/ Integrated Mechanical Timer.
T-LT150	150W, 12-15V, Single Circuit Transformer.
T-LT300	300W, 12-15V, Single Circuit Transformer.
T-LT600	600W, 12-15V, Dual Circuit Transformer.
T-LT900	900W, 12-22V, Triple Circuit Transformer.
T-FIDT	Field Installed Plug-in Digital Timer.
T-FIT	Field Installed Plug-in Mechanical Timer.
T-TR-FIP	Field Installed Plug-in Photocell



T-LT75



T-FIDT

Faceplates

CX-880B-AB Brass Louvered Coverplate



6 1/2"



T-TR-FIP



T-LT300

Dimmers


CX-DIM-100 100W, Low Voltage Dimmer Switch.
Use with T-LT Series Transformers, Black



CX-DIM-100

Cable Connectors

CX-LOC Quick-locking Cable Connectors, Tan
([Installation Instructions](#))

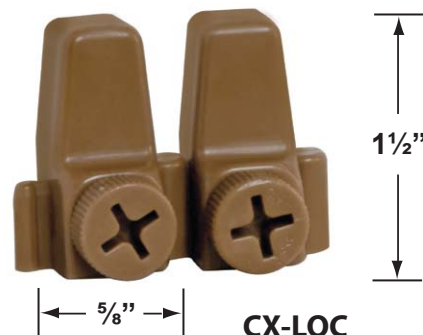

CX-LOC