

SPECIFICATION SHEET

PRODUCT # : CL-343B-GM

• Step Lights

• Cast Brass

Fixture Specifications:

Housing: Corrosion Resistant Cast Brass.

Faceplate: Diecast solid brass, fitted to housing with silicone "O" ring gasket.

Finish: **GM- Gun Metal.** Natural toning process. GM finish will vary due to artistic process. Also available in **AB**, and **SI** finishes

Lens: Frosted and heat resistant flat glass.

Socket: Top grade bi-pin socket.

Lamp: 12V T3 LED.
Available in 3W Bluetooth mesh smart RGB-WW or CCT; 2W, 2.5W LED or without lamp.
See the Lamp Guide below for more information.

Mounting: Surface mounted, includes mounting plate.

Wiring: Fixture is prewired with a 18-2 SPT1-W direct burial cord. Wire connector sold separately. Quick-locking connectors are available from Corona Lighting (**CX-LOC**) find details on page 2.




Gasket: Silicone "O" ring seals faceplate to housing providing weather tight protection

Electrical Notes: A remote 12V transformer is required. Options are available from Corona Lighting (see page 2). Voltage range for LED lamps are 8V-21V, CCT/BT are 9V-17V.
Proper grease/lubricant is suggested on threaded parts during installation process.

Warranty: Limited lifetime warranty on fixture against manufacturer's defects.



Twist To Lock Function
Tool Free relamping.



AVAILABLE LED LAMPS (Corona LED lamps have a five (5) year limited warranty against manufacturer's defects)

LAMP NUMBER	WATTS	BEAM		COLOR & TEMP.	RATED HOURS	HALOGEN EQUIVALENT
		SPREAD	LUMEN			
L-EDT3-3W-BT	0.5 - 3	360°	10-200	2200K-5700K	25,000	20W
(Color-Changing, Color Temperature Changing, Zoning, & Dimming)						
L-EDT3-3W-CCT	0.5 - 3	360°	10 - 250	2200K - 5700K	25,000	20W
(Color Temperature Changing, Zoning, & Dimming)						
L-EDT3-2W	2	360°	200	2700K	25,000	20W
L-EDT3-2.5W	2.5	180°	240	2700K	25,000	35W
L-EDT3-2W-3K	2	360°	210	3000K	25,000	20W
L-EDT3-2.5W-3K	2.5	180°	250	3000K	25,000	35W
L-EDT3-AM*	2	360°	170	2000K	25,000	20W

* AM- Amber color
* -Bluetooth connection
* -Color changing

For more additional Lamps, and accessories visit Coronalighting.com

JOB INFORMATION

TYPE: DATE:

JOB NAME & ADDRESS:

PRODUCT #:

TOTAL QUANTITY:

LAMP TYPE & WATTAGE:

TRANSFORMER:

CONTRACTOR:

SPECIFIER:

• If you are ordering LED lamps you should follow the format below:

• **CL** - **product #** - **lamp** - **wattage**

CL - 343B-GM - L-EDT3 - 2W-3K

Example: CL-343B-GM-L-EDT3-2W-3K

• Corona Lighting reserves the right to make any change and/or improvement to the design and construction of this fixture without further notification.

PRODUCT # : CL-343B-GM

Stainless Steel Pool and Spa Rated Transformers

- T-LT150-Z 150W, 12-15V Smart Zoning Single Circuit
([Spec Sheet](#)) | ([Installation Instructions](#))
- T-LT300-Z 300W, 12-15V Smart Zoning Single Circuit
([Spec Sheet](#)) | ([Installation Instructions](#))
- T-LTF60 60W, 12V, Compact Mini Transformer
- T-LT75 75W, 12 and 15V, Single Circuit Transformer
w/ Integrated Mechanical Timer.
- T-LT150 150W, 12-15V, Single Circuit Transformer.
- T-LT300 300W, 12-15V, Single Circuit Transformer.
- T-LT600 600W, 12-15V, Dual Circuit Transformer.
- T-LT900 900W, 12-22V, Triple Circuit Transformer.
- T-FIDT Field Installed Plug-in Digital Timer.
- T-FIT Field Installed Plug-in Mechanical Timer.
- T-TR-FIP Field Installed Plug-in Photocell

•Step Lights

•Cast Brass



T-LT150-Z



T-TR-FIP




T-FIDT



T-LT300-Z

Cable Connectors

- CX-LOC Quick-locking Cable Connectors, **Tan**
([Installation Instructions](#))

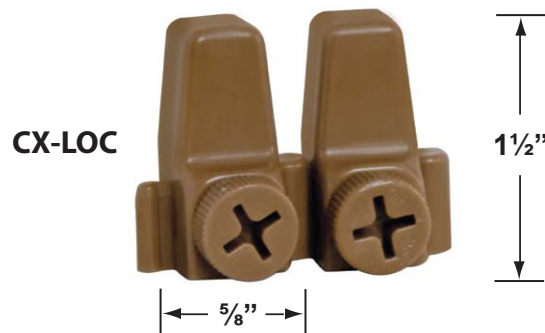

CX-LOC

Dimmers

- CX-DIM-100 100W, Low Voltage Dimmer Switch.
Use with T-LT Series Transformers, **Black**



CX-DIM-100