

SPECIFICATION SHEET

E-Mail: sales@coronalighting.com

PRODUCT # : CL-385

•Hanging Light

•Aluminum

Fixture Specifications:

Housing: Die-cast aluminum.

Finish: Polyester UV powder coated available only in **BK- Black**

Lens: None.

Socket: Top-grade ceramic bi-pin socket, with retension clip.

Lamp: 12V T3 LED.
Available in 3W Bluetooth mesh smart RGB-WW; 2W, 2.5W LED or without lamp.
See the Lamp Guide below for more information.
Also compatible with MR-11 lamps

Wiring:

Fixture is prewired with a 5-ft 18-2 SPT1-W cord. Wire connector sold separately. Quick-locking connectors are available from Corona Lighting (CX-LOC) find details on page 2.



Electrical Notes:

A remote 12V transformer is required. Options are available from Corona Lighting (see page 2) Voltage range for BT lamps are 9-17V, LED are 8-21V. Proper grease/lubricant is suggested on threaded parts during installation process.

Warranty:

One (1) year warranty on fixture and housing against manufacturer's defects

Mounting: Cast aluminum loop with 5-foot stainless steel hanging cable.

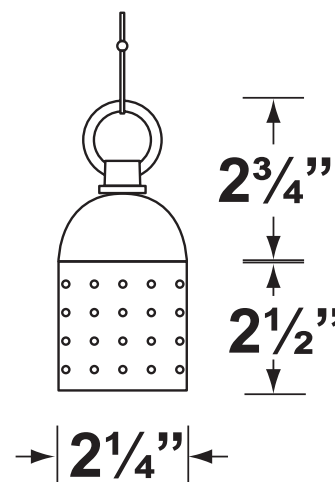

AVAILABLE LED LAMPS (Corona LED lamps have a five (5) year limited warranty against manufacturer's defects)

LAMP NUMBER	WATTS	BEAM		COLOR & TEMP.	RATED HOURS	HALOGEN EQUIVALENT
		SPREAD	LUMEN			
L-EDT3-3W-BT	0.5-3	360°	10-200	2200K-5700K	50,000	---
L-EDT3-2W	2	360°	200	2700K	25,000	20 Watt
L-EDT3-2.5W	2.5	180°	240	2700K	25,000	35 Watt
L-EDT3-2W-3K	2	360°	210	3000K	25,000	20 Watt
L-EDT3-2.5W-3K	2.5	180°	250	3000K	25,000	35 Watt
L-EDT3-AM*	2	360°	170	2000K	25,000	20 Watt
L-ED11-2.5W	2.5	38° FL	180	2700K	50,000	20 Watt

* AM- Amber color
For more additional Lamps, and accessories visit Coronalighting.com

JOB INFORMATION

TYPE: DATE:

JOB NAME & ADDRESS:

PRODUCT #:

TOTAL QUANTITY:

LAMP TYPE & WATTAGE:

TRANSFORMER:

CONTRACTOR:

SPECIFIER:

• When ordering a halogen or xenon lamp add lamp number to the product number. If you are ordering LED lamps you should follow the format below:

• CL - product # - lamp - wattage

CL - 385-BK - L-EDT3 - 2.5W

Example: CL-385-BK-L-EDT3-2.5W

• Corona Lighting reserves the right to make any change and/or improvement to the design and construction of this fixture without further notification.

ACCESSORIES SHEET

PRODUCT # : CL-385

• Hanging Lights

• Aluminum

Stainless Steel Pool and Spa Rated Transformers

T-LTF60	60W, 12V, Compact Mini Transformer
T-LT75	75W, 12 and 15V, Single Circuit Transformer w/ Integrated Mechanical Timer.
T-LT150	150W, 12-15V, Single Circuit Transformer.
T-LT300	300W, 12-15V, Single Circuit Transformer.
T-LT600	600W, 12-15V, Dual Circuit Transformer.
T-LT900	900W, 12-22V, Triple Circuit Transformer.
T-FIDT	Field Installed Plug-in Digital Timer.
T-FIT	Field Installed Plug-in Mechanical Timer.
T-TR-FIP	Field Installed Plug-in Photocell



T-FIDT



T-TR-FIP



T-LT75



T-LT300

T-LT150



Dimmers


CX-DIM-100	100W, Low Voltage Dimmer Switch. Use with T-LT Series Transformers, Black
------------	---



CX-DIM-100

Cable Connectors

CX-LOC	Quick-locking Cable Connectors, Tan (Installation Instructions)
--------	---

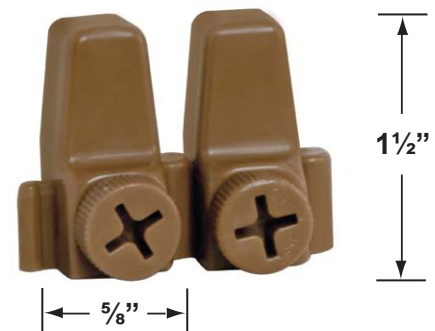

CX-LOC