

SPECIFICATION SHEET

PRODUCT # : CL-514B-GM

•Directional Lights

•Cast Brass

Fixture Specifications:

Housing & Shroud: Corrosion Resistant Cast Brass.

Gasket: Silicone gasket for water tight sealing.

Finish: **GM- Gun Metal** Natural toning process. GM finish will vary due to artistic process. Also available in **AB**, and **RC**.

Knuckle: Adjustable cast brass knuckle with thumb screw and 1/2" NPT threaded male hub on bottom.

Lens: Clear and heat resistant convex glass.

Mounting Spike: Standard injection molded spike with 1/2" NPT threaded female hub.


Socket: Top grade loose bi-pin socket, with spring loaded design.

Electrical Notes: A remote 12V transformer is required. OOptions are available from Corona Lighting (see page 4). Voltage range for BT/LED lamps are 9V-17V. Proper grease/lubricant is suggested on threaded parts during installation process.


Lamp: 12V, MR-16 LED
Available in 5W Bluetooth mesh smart RGB-WW, 3.5W, 5W, 6W or without lamp.
See lamp guide, below for more information.

Warranty: Limited lifetime warranty on fixture housing against manufacturer's defects.

Wiring: Fixture is prewired with a 5-ft 18-2 SPT2-W direct burial cord. Wire connector sold separately. Quick-locking connectors are available from Corona Lighting (CX-LOC) find details on page 2.



3.5W, 5W & 6W

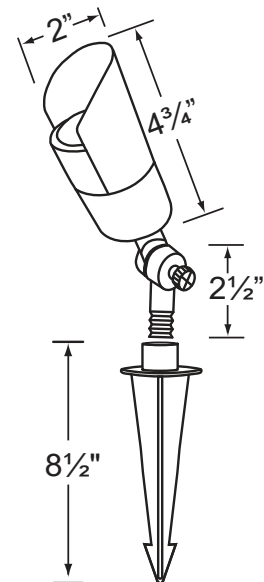

AVAILABLE LED LAMPS

LAMP NUMBER	WATTS	BEAM		COLOR & TEMP.	RATED HOURS	HALOGEN EQUIVALENT
		SPREAD	LUMEN			
L-ED16-5W-BT	1-5	15° / 38° / 60°	25-530	2200K-5700K	50,000	---
L-ED16-3W / 5W-SP	3.5 / 5	15° Spot	270 / 350	2700K	50,000	25 / 40 Watt
L-ED16-3W / 5W-FL	3.5 / 5	45° Flood	270 / 350	2700K	50,000	25 / 40 Watt
L-ED16-3W / 5W-WF	3.5 / 5	60° Wide Flood	270 / 350	2700K	50,000	25 / 40 Watt
L-ED16-COB5W-SP / 3K	5	15° Spot	450 / 470	2700K / 3000K	50,000	50 Watt
L-ED16-COB5W-FL / 3K	5	38° Flood	450 / 470	2700K / 3000K	50,000	50 Watt
L-ED16-COB5W-WF / 3K	5	60° Wide Flood	450 / 470	2700K / 3000K	50,000	50 Watt
L-ED16-6W-SP / 3K	6	15° Spot	600	2700K / 3000K	50,000	75 Watt
L-ED16-6W-FL / 3K	6	38° Flood	600	2700K / 3000K	50,000	75 Watt
L-ED16-6W-WF / 3K	6	60° Wide Flood	600	2700K / 3000K	50,000	75 Watt

■5W Single color MR-16 LED available in AMBER, BLUE, GREEN, PURPLE, RED and VIOLET

JOB INFORMATION

TYPE: _____ DATE: _____
JOB NAME & ADDRESS: _____
PRODUCT #: _____
TOTAL QUANTITY: _____
LAMP TYPE & WATTAGE: _____
TRANSFORMER: _____
CONTRACTOR: _____
SPECIFIER: _____

• When ordering LED lamp with a fixture your part number should follow the format below:

• CL - product # - lamp - wattage - lamp angle

CL - 514B-GM - L-ED16 - 5W - FL

Example: CL-514B-GM-L-ED16-5W-FL

• Corona Lighting reserves the right to make any change and/or improvement to the design and construction of this fixture without further notification.


PRODUCT # : CL-514B-GM

•Directional Lights

•Cast Brass

Mounting Pedestals

CX-603-BK 3" PVC Mounting Pedestal, 1/2" NPT Female Brass Hub on top, **Black**



CX-603-BK

CX-621-BK 1" PVC Cap, 1/2" NPT, **Black**

CX-622-BK 2" PVC Cap, 1/2" NPT, **Black**


CX-624-BK 3" PVC Cap, 1/2" NPT Female Brass Hub, **Black**

Ground Spikes

CX-642-BK 8.5" ABS Spike, 1/2" NPT, **Black**

CX-642-BZ 8.5" ABS Spike, 1/2" NPT, **Bronze**

CX-643-BZ 8.5" ABS Spike, 1/2" NPT, **Bronze**

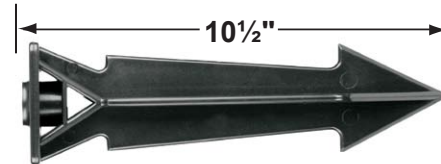

CX-647-BK

CX-646-BK 8" ABS Spike, 1/2" NPT, **Black**

CX-646-BR 8" ABS Spike, 1/2" NPT, **Natural Brass**


CX-646-SS 8" ABS Spike, 1/2" NPT, **Stainless Steel**

CX-647-BK 10.5" Heavy Duty ABS Spike, 1/2" NPT, **Black**

Cable Connectors

CX-LOC Quick-locking Cable Connectors, **Tan**

[\(Installation Instructions\)](#)

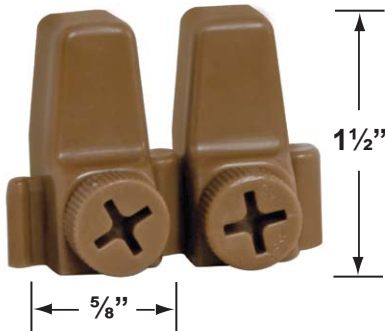

CX-LOC

Mounting Risers

CX-682B-GM 6" Brass Riser, 1/2" NPT Male/Female, **Gun Metal**

CX-683B-GM 12" Brass Riser, 1/2" NPT Male/Female, **Gun Metal**

CX-684B-GM 18" Brass Riser, 1/2" NPT Male/Female, **Gun Metal**

CX-685B-GM 24" Brass Riser, 1/2" NPT Male/Female, **Gun Metal**



CX-682B-GM 6"



CX-683B-GM 12"



CX-684B-GM 18"



CX-685B-GM 24"

Mounting Canopies

CX-705B-GM Brass Flat Canopy, 1/2" NPT, **Gun Metal**

CX-709B-GM Brass Raised Canopy, 1/2" NPT, **Gun Metal**

CX-718B-GM 5" Brass Canopy, 3-Hole 1/2" NPT, **Gun Metal**

CX-719B-GM Brass Tree Mounting Bracket, 1/2" NPT, **Gun Metal**

CX-720-BR Brass Tree mount Canopy with 9" Rubber Strap stretches to 14, **Natural Brass**

CX-721-BR Brass Tree mount Canopy with 15" Rubber Strap stretches to 22", **Natural Brass**

CX-722-BR Brass Tree mount Canopy with 22" Rubber Strap stretches to 33", **Natural Brass**

CX-723-BR Brass Tree mount Canopy with 31" Rubber Strap stretches to 45", **Natural Brass**



CX-709B-GM



CX-705B-GM



CX-719B-GM



CX-718B-GM



CX-722-BR

PRODUCT # : CL-514B-GM

•Directional Lights

•Cast Brass

Mounting Posts For Sign Light & Path Light Applications

- CX-678B-GM 24" Brass Single Head Post, **Gun Metal**
- CX-679B-GM 24" Brass Double Head Post, **Gun Metal**
- CX-690B-GM 18" Brass Single Head Post, **Gun Metal**
- CX-693B-GM 18" Brass Double Head Post, **Gun Metal**

•CX-718B-GM (Mounting Canopies pg 2) is required for sign light installation.



Dimmers

- CX-DIM-100 100W, Low Voltage Dimmer Switch.
Use with T-LT Series Transformers, **Black**



CX-DIM-100

Special Lenses & Honeycomb Louvers

- CX-238 MR-16 Snap-on holder, **Silver Plated**
- CX-239 MR-16 honeycomb louver, **Black**
- CX-240-AM MR-16 color lens, **Amber**
- CX-240-BL MR-16 color lens, **Blue**
- CX-240-GR MR-16 color lens, **Green**
- CX-240-RD MR-16 color lens, **Red**
- CX-240-YL MR-16 color lens, **Yellow**
- CX-241 MR-16 lens, **Linear Spread**
- CX-242 MR-16 lens, **Frosted**
- CX-243 MR-16 lens, **Prismatic**

•For MR-16 Lenses and Louvers, you will need the CX-238



ACCESSORIES SHEET

PRODUCT # : CL-514B-GM

•Directional Lights

• Cast Brass

Stainless Steel Pool and Spa Rated Transformers

- T-LTF60 60W, 12V, Compact Mini Transformer
- T-LT75 75W, 12 and 15V, Single Circuit Transformer w/ Integrated Mechanical Timer.
- T-LT150 150W, 12-15V, Single Circuit Transformer.
- T-LT300 300W, 12-15V, Single Circuit Transformer.
- T-LT600 600W, 12-15V, Dual Circuit Transformer.
- T-LT900 900W, 12-22V, Triple Circuit Transformer.
- T-FIDT Field Installed Plug-in Digital Timer.
- T-FIT Field Installed Plug-in Mechanical Timer.
- T-TR-FIP Field Installed Plug-in Photocell



T-LT75



T-LT150



T-FIDT



T-LT300



T-TR-FIP



T-LT600