



WWW.CORONALIGHTING.COM

ARCHITECTURAL GRADE SERIES

SPECIFICATION SHEET

1633 Staunton Ave

Los Angeles, CA 90021

TEL.

FAX.

(800) 727-9262

(800) 727-9957

(213) 747-4500

(213) 747-3234

E-Mail: sales@coronalighting.com

PRODUCT # : CL-647B-AB

•Area Lights

•Cast Brass

Fixture Specifications:

Housing: Corrosion resistant cast brass.

Stem: Solid brass pipe with 1/2" NPT on bottom.

Finish: **AB- Antique Bronze.** Natural toning process.
AB finish will vary due to artistic process.
Also available in **GM, RC, and SI** finishes

Lens: Frosted polycarbonate, cover over lamp providing
sprinkler water protection.

Socket: Top grade fixed ceramic bi-pin socket. Easy tool
free lamp access.

Lamp: 12V T3 LED.
Available in 3W Bluetooth Mesh smart RGB-WW;
2W, 2.5W LED or without lamp.
See the Lamp Guide below for more information.

Wiring:

Fixture is prewired with a 3-ft 18-2 SPT2-W direct
burial cord. Wire connector sold separately.
Quick-locking connectors are available from Corona
Lighting (**CX-LOC**) find details on page 3.

Mounting Spike:


Standard injection molded spike with 1/2" NPT
threaded female hub.

Electrical Notes:


A remote 12V transformer is required. Options are
available from Corona Lighting (See page 3).
Voltage range for BT lamps are 9-17V, LED are 8-21V.
Proper grease/lubricant is suggested on
threaded parts during installation process.

Warranty:

Limited lifetime warranty on fixture housing and stem
against manufacturer's defects.



2W, 2.5W & 3W

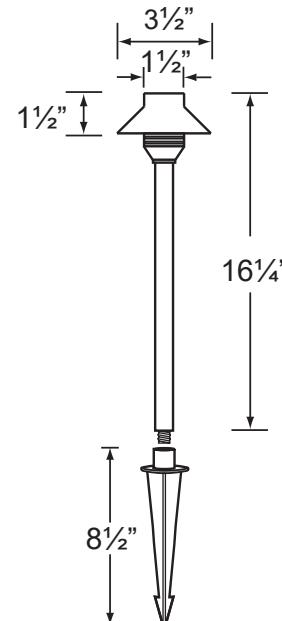

AVAILABLE LED LAMPS

(Corona LED lamps have a five (5) year limited warranty against manufacturer's defects)

| LAMP NUMBER | WATTS | BEAM SPREAD | LUMEN | COLOR & TEMP. | RATED HOURS | HALOGEN EQUIVALENT |
|----------------|-------|-------------|--------|---------------|-------------|--------------------|
| L-EDT3-3W-BT* | 0.5-3 | 360° | 10-200 | 2200K-5700K | 50,000 | --- |
| L-EDT3-2W | 2 | 360° | 200 | 2700K | 25,000 | 20 Watt |
| L-EDT3-2.5W | 2.5 | 180° | 240 | 2700K | 25,000 | 35 Watt |
| L-EDT3-2W-3K | 2 | 360° | 210 | 3000K | 25,000 | 20 Watt |
| L-EDT3-2.5W-3K | 2.5 | 180° | 250 | 3000K | 25,000 | 35 Watt |
| L-EDT3-AM* | 2 | 360° | 170 | 2000K | 25,000 | 20 Watt |

* AM- Amber color

For more additional Lamps, and accessories visit Coronalighting.com

JOB INFORMATION

TYPE: DATE:

JOB NAME & ADDRESS:

PRODUCT #:

TOTAL QUANTITY:

LAMP TYPE & WATTAGE:

TRANSFORMER:

CONTRACTOR:

SPECIFIER:

• When ordering a halogen or xenon lamp add lamp number to the product number. If you are ordering LED lamps you should follow the format below:

•CL - **product #** - **lamp** - **wattage**

Example: CL-647B-AB-L-EDT3-2W-3K

CL - **647B-AB** - **L-EDT3** - **2W-3K**

• Corona Lighting reserves the right to make any change and/or improvement to the design and construction of this fixture without further notification.

ACCESSORIES SHEET

PRODUCT # : CL-647B-AB

Mounting Pedestals

CX-603-BK 3" PVC Mounting Pedestal, $\frac{1}{2}$ " NPT Female Brass Hub on top, **Black**



CX-603-BK

CX-621-BK 1" PVC Cap, $\frac{1}{2}$ " NPT, **Black**

CX-622-BK 2" PVC Cap, $\frac{1}{2}$ " NPT, **Black**

CX-624-BK 3" PVC Cap, $\frac{1}{2}$ " NPT Female Brass Hub, **Black**

Mounting Canopies

CX-705B-AB Brass Flat Canopy, $\frac{1}{2}$ NPT, **Antique Bronze**

CX-709B-AB Brass Raised Canopy, $\frac{1}{2}$ NPT, **Antique Bronze**

CX-718B-AB 5" Brass Canopy, 3-Hole $\frac{1}{2}$ NPT, **Antique Bronze**

CX-719B-AB Brass Tree Mounting Bracket, $\frac{1}{2}$ NPT, **Antique Bronze**


CX-721B-AB Brass Tree Mount Canopy with 15" Rubber Strap stretches to 22", **Antique Bronze**

CX-722B-AB Brass Tree Mount Canopy with 22" Rubber Strap stretches to 33", **Antique Bronze**

CX-723B-AB Brass Tree Mount Canopy with 31" Rubber Strap stretches to 45", **Antique Bronze**



CX-705B-AB




CX-718B-AB



CX-722B-AB



CX-709B-AB

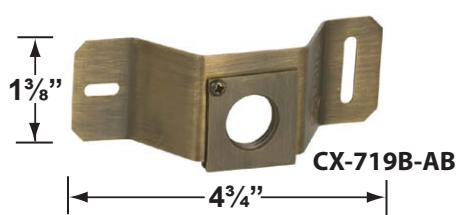


CX-719B-AB

- Area Lights

- Cast Brass

Ground Spike Supplied

CX-645-BK 8.5" ABS Spike, $\frac{1}{2}$ " NPT, **Black**

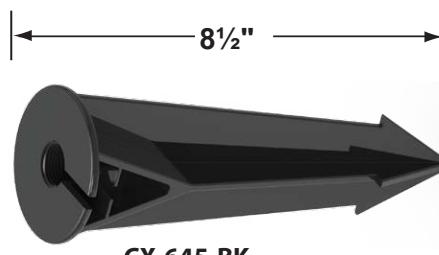


CX-645-BK


Optional Ground Spikes

CX-646-BR 8" h x $\frac{1}{2}$ " w Brass Spike, $\frac{1}{2}$ " NPT, **Natural Brass**

CX-650-BZ 8 1/2" h x 3" w Slotted ABS Spike with Brass Threads, $\frac{1}{2}$ " NPT, **Bronze**

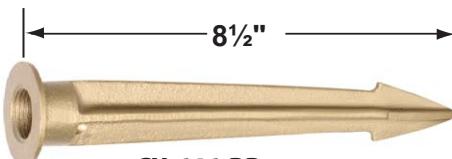

CX-646-BR

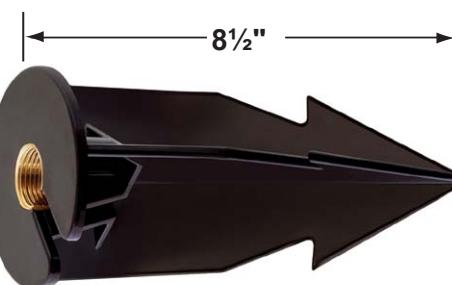

CX-650-BZ

Mounting Risers

CX-682B-AB 6" Brass Riser, $\frac{1}{2}$ NPT Male/Female, **Antique Bronze**

CX-683B-AB 12" Brass Riser, $\frac{1}{2}$ NPT Male/Female, **Antique Bronze**

CX-684B-AB 18" Brass Riser, $\frac{1}{2}$ NPT Male/Female, **Antique Bronze**


CX-685B-AB 24" Brass Riser, $\frac{1}{2}$ NPT Male/Female, **Antique Bronze**



CX-682B-AB 6"



CX-683B-AB 12"



CX-684B-AB 18"



CX-685B-AB 24"

ACCESSORIES SHEET

PRODUCT # : CL-647B-AB

- Area Lights

- Cast Brass

Stainless Steel Pool and Spa Rated Transformers

| | |
|----------|--|
| T-LTF60 | 60W, 12V, Compact Mini Transformer |
| T-LT75 | 75W, 12 and 15V, Single Circuit Transformer w/ Integrated Mechanical Timer. |
| T-LT150 | 150W, 12-15V, Single Circuit Transformer. |
| T-LT300 | 300W, 12-15V, Single Circuit Transformer. |
| T-LT600 | 600W, 12-15V, Dual Circuit Transformer. |
| T-LT900 | 900W, 12-22V, Triple Circuit Transformer. |
| T-FIDT | Field Installed Plug-in Digital Timer. |
| T-FIT | Field Installed Plug-in Mechanical Timer. |
| T-TR-FIP | Field Installed Plug-in Photocell |


T-LT75

T-FIDT

T-LT300

T-TR-FIP

T-LT150

Dimmer

CX-DIM-100 100W, Low Voltage Dimmer Switch.
Use with T-LT Series Transformers, **Black**


CX-DIM-100

Cable Connectors

CX-LOC Quick-locking Cable Connectors, **Tan**
[\(Installation Instructions\)](#)

