

SPECIFICATION SHEET

PRODUCT # : CL-648C-RC

•Area Lights

•Solid Copper

Fixture Specifications:

Housing: Corrosion resistant solid copper.

Stem: Solid copper pipe with ½" NPT on bottom.

Finish: **RC- Raw Copper.** Will age gradually over time.

Lens: Frosted polycarbonate, cover over lamp providing sprinkler water protection.

Socket: Top grade fixed ceramic bi-pin socket. Easy tool free lamp access.



Lamp: 12V T3 LED.
Available in 3W Bluetooth mesh smart RGB-WW or CCT; 2W, 2.5W LED or without lamp.
See the Lamp Guide below for more information.

Wiring: Fixture is prewired with a 3-ft 18-2 SPT2-W direct burial cord. Wire connector sold separately. Quick-locking connectors are available from Corona Lighting (**CX-LOC**) find details on page 2.

Mounting Spike: Standard injection molded spike with ½" NPT threaded female hub.

Electrical Notes: A remote 12V transformer is required. Options are available from Corona Lighting (see page 3). Voltage range for BT lamps are 9-17V, LED are 8-21V. Proper grease/lubricant is suggested on threaded parts during installation process.

Warranty: Limited lifetime warranty on fixture housing and stem against manufacturer's defects.

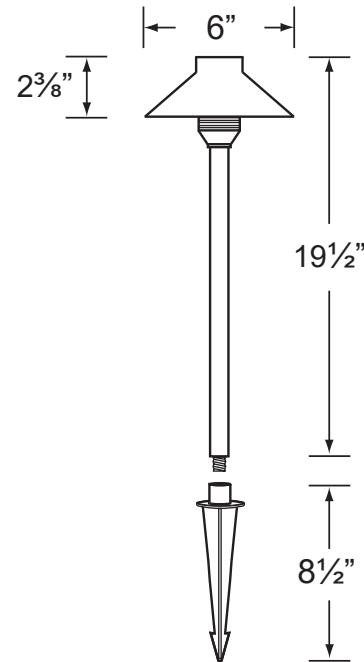

AVAILABLE LED LAMPS (Corona LED lamps have a five (5) year limited warranty against manufacturer's defects)

LAMP NUMBER	WATTS	BEAM		COLOR & TEMP.	RATED HOURS	HALOGEN EQUIVALENT
		SPREAD	LUMEN			
L-EDT3-3W-BT	0.5 - 3	360°	10-200	2200K-5700K	25,000	20W
(Color-Changing, Color Temperature Changing, Zoning, & Dimming)						
L-EDT3-3W-CCT	0.5 - 3	360°	10 - 250	2200K - 5700K	25,000	20W
(Color Temperature Changing, Zoning, & Dimming)						
L-EDT3-2W	2	360°	200	2700K	25,000	20W
L-EDT3-2.5W	2.5	180°	240	2700K	25,000	35W
L-EDT3-2W-3K	2	360°	210	3000K	25,000	20W
L-EDT3-2.5W-3K	2.5	180°	250	3000K	25,000	35W
L-EDT3-AM*	2	360°	170	2000K	25,000	20W

✧ AM- Amber color
✧ -Bluetooth connection
● -Color changing

For more additional Lamps, and accessories visit Coronalighting.com

JOB INFORMATION

TYPE: DATE:

JOB NAME & ADDRESS:

PRODUCT #:

TOTAL QUANTITY:

LAMP TYPE & WATTAGE:

TRANSFORMER:

CONTRACTOR:

SPECIFIER:

• When ordering a halogen or xenon lamp add lamp number to the product number. If you are ordering LED lamps you should follow the format below:

• **CL** - **product #** - **lamp** - **wattage**

CL - 648C-RC - L-EDT3 - 2W-3K

Example: CL-648C-RC-L-EDT3-2W-3K

• Corona Lighting reserves the right to make any change and/or improvement to the design and construction of this fixture without further notification.


PRODUCT # :CL-648C-RC

• Area Lights

• Solid Copper

Mounting Pedestals

CX-603-BK 3" PVC Mounting Pedestal, 1/2" NPT Female Brass Hub on top, **Black**

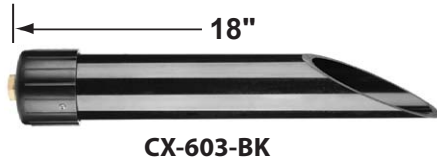

CX-621-BK 1" PVC Cap, 1/2" NPT, **Black**

CX-622-BK 2" PVC Cap, 1/2" NPT, **Black**


CX-624-BK 3" PVC Cap, 1/2" NPT Female Brass Hub, **Black**

Ground Spikes

CX-640-BK 6" Aluminum Spike, 1/2" NPT Male Hub, **Black**

CX-642 8 1/2" h x 1/2" w ABS Spike, 1/2" NPT, **Black, Bronze**

CX-643-BZ 8 1/2" h x 3" w ABS Spike, 1/2" NPT, **Bronze**

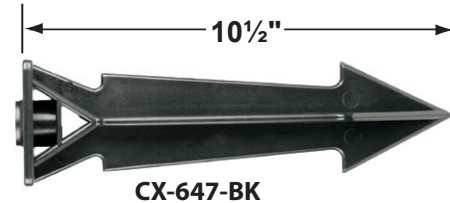

CX-646-BK 8" ABS Spike, 1/2" NPT, **Black**

CX-646-BR 8" h x 1/2" w Brass Spike, 1/2" NPT, **Natural Brass**

CX-647-BK 10.5" Heavy Duty ABS Spike, 1/2" NPT, **Black**

CX-650-BZ 8.5" Slotted ABS Spike with Brass Treads, **Bronze**

Mounting Canopies

CX-705B-BR Brass Flat Canopy, 1/2" NPT, **Natural Brass**

CX-709B-BR Brass Raised Canopy, 1/2" NPT, **Natural Brass**




Mounting Risers

CX-682C-RC 6" Copper Riser, 1/2" NPT Male/Female, **Raw Copper**

CX-683C-RC 12" Copper Riser, 1/2" NPT Male/Female, **Raw Copper**

CX-684C-RC 18" Copper Riser, 1/2" NPT Male/Female, **Raw Copper**

CX-685C-RC 24" Copper Riser, 1/2" NPT Male/Female, **Raw Copper**

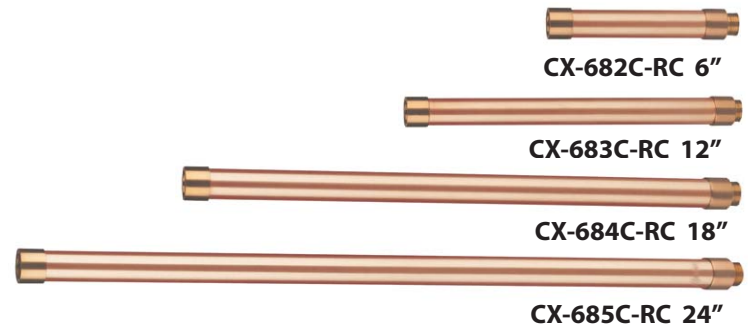


Dimmers

CX-DIM-100 100W, Low Voltage Dimmer Switch. Use with T-LT Series Transformers, **Black**



Cable Connectors

CX-LOC Quick-locking Cable Connectors, **Tan**
([Installation Instructions](#))

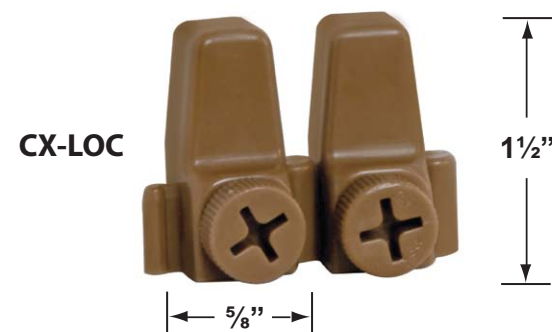

ACCESSORIES SHEET

PRODUCT # :CL-648C-RC

• Area Lights

• Solid Copper

Stainless Steel Pool and Spa Rated Transformers

- T-LT150-Z 150W, 12-15V Smart Zoning Single Circuit
([Spec Sheet](#)) | ([Installation Instructions](#))
- T-LT300-Z 300W, 12-15V Smart Zoning Single Circuit
([Spec Sheet](#)) | ([Installation Instructions](#))
- T-LTF60 60W, 12V, Compact Mini Transformer
- T-LT75 75W, 12 and 15V, Single Circuit Transformer
w/ Integrated Mechanical Timer.
- T-LT150 150W, 12-15V, Single Circuit Transformer.
- T-LT300 300W, 12-15V, Single Circuit Transformer.
- T-LT600 600W, 12-15V, Dual Circuit Transformer.
- T-LT900 900W, 12-22V, Triple Circuit Transformer.
- T-FIDT Field Installed Plug-in Digital Timer.
- T-FIT Field Installed Plug-in Mechanical Timer.
- T-TR-FIP Field Installed Plug-in Photocell



T-LT150-Z



T-LT300



T-FIDT



T-LT300-Z



T-LT75



T-LT150



T-TR-FIP