

SPECIFICATION SHEET

PRODUCT # : CL-649B-AB

•Area Lights

•Cast Brass

Fixture Specifications:

Housing: Brass shade, adjustable in height for light control.

Stem: Solid brass pipe with 1/2" NPT on bottom.

Finish: **AB- Antique Bronze.** Natural toning process. AB finish will vary due to artistic process. Also available in **GM- Gun Metal**

Lens: Clear glass, cover over lamp providing sprinkler water protection. Frosted lens (**CX-308-FR**) available.

Socket: S.C. Bayonet socket, easy tool free lamp access.

Lamp: 12V S.C. Bayonet LED.
Available in 3W Bluetooth mesh smart RGB-WW or CCT; 2W, 2.5W LED or without lamp.
See the Lamp Guide below for more information.


Gasket: Silicone "O" ring gasket seals lens to socket housing for water tight sealing.

Wiring: Fixture is prewired with a 3-ft 18-2 SPT2-W direct burial cord. Wire connector sold separately. Quick-locking connectors are available from Corona Lighting (**CX-LOC**) find details on page 2.

Mounting Spike: Standard injection molded spike with 1/2" NPT threaded female hub.

Electrical Notes: A remote 12V transformer is required. Options are available from Corona Lighting (see page 3). Voltage range for BT lamps are 9-17V, LED are 8-21V. Proper grease/lubricant is suggested on threaded parts during installation process.

Warranty: Limited lifetime warranty on fixture housing and stem against manufacturer's defects.

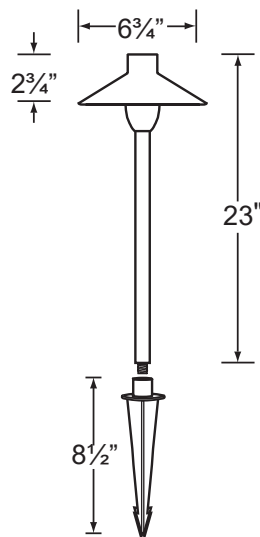
CL-649B-AB
18" Standard
stem shown


2W, 2.5W & 3W


CL-649B-AB-12
12" Stem shown

Stem
options

CL-649B-AB-24
24" Stem shown

AVAILABLE LED LAMPS (Corona LED lamps have a five (5) year limited warranty against manufacturer's defects)

LAMP NUMBER	WATTS	BEAM		COLOR & TEMP.	RATED HOURS	HALOGEN EQUIVALENT
		SPREAD	LUMEN			
L-EDBA-3W-BT	0.5 - 3	360°	10-200	2200K - 5700K	25,000	20W
(Color-Changing, Color Temperature Changing, Zoning, & Dimming)						
L-EDBA-3W-CCT	0.5 - 3	360°	10 - 250	2200K - 5700K	25,000	20W
(Color Temperature Changing, Zoning, & Dimming)						
L-EDBA-2W	2	360°	200	2700K	25,000	20W
L-EDBA-2.5W	2.5	180°	240	2700K	25,000	35W
L-EDBA-2W-3K	2	360°	210	3000K	25,000	20W
L-EDBA-2.5W-3K	2.5	180°	250	3000K	25,000	35W
L-EDBA-AM*	2	360°	170	2000K	25,000	20W

* AM- Amber color

* -Bluetooth connection

* -Color changing

For more additional Lamps, and accessories visit Coronalighting.com

JOB INFORMATION

TYPE: DATE:

JOB NAME & ADDRESS:

PRODUCT #:

TOTAL QUANTITY:

LAMP TYPE & WATTAGE:

TRANSFORMER:

CONTRACTOR:

SPECIFIER:

• When ordering a halogen or xenon lamp add lamp number to the product number. If you are ordering LED lamps you should follow the format below:

• CL - product # - Length - lamp - wattage

CL - 649B-AB - 18 - L-EDBA - 2W-3K

Example: CL-649B-AB-18-L-EDBA-2W-3K

• Corona Lighting reserves the right to make any change and/or improvement to the design and construction of this fixture without further notification.


PRODUCT # : CL-649B-AB

• Area Lights

• Cast Brass

Mounting Pedestals

CX-603-BK 3" PVC Mounting Pedestal, 1/2" NPT Female Brass Hub on top, **Black**



CX-603-BK

CX-621-BK 1" PVC Cap, 1/2" NPT, **Black**

CX-622-BK 2" PVC Cap, 1/2" NPT, **Black**

CX-624-BK 3" PVC Cap, 1/2" NPT Female Brass Hub, **Black**

Mounting Canopies

CX-705B-AB Brass Flat Canopy, 1/2 NPT, **Antique Bronze**

CX-709B-AB Brass Raised Canopy, 1/2 NPT, **Antique Bronze**

CX-718B-AB 5" Brass Canopy, 3-Hole 1/2 NPT, **Antique Bronze**


CX-721B-AB Brass Tree Mount Canopy with 15" Rubber Strap stretches to 22", **Antique Bronze**

CX-722B-AB Brass Tree Mount Canopy with 22" Rubber Strap stretches to 33", **Antique Bronze**


CX-723B-AB Brass Tree Mount Canopy with 31" Rubber Strap stretches to 45", **Antique Bronze**



CX-705B-AB



CX-709B-AB



CX-718B-AB




CX-722B-AB

Ground Spikes

CX-640-BK 6" Aluminum Spike, 1/2" NPT Male Hub, **Black**

CX-642 8 1/2" h x 1/2" w ABS Spike, 1/2" NPT, **Black, Bronze**

CX-643-BZ 8 1/2" h x 3" w ABS Spike, 1/2" NPT, **Bronze**

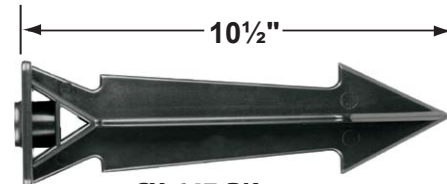

CX-647-BK

CX-646-BK 8" ABS Spike, 1/2" NPT, **Black**

CX-646-BR 8" h x 1/2" w Brass Spike, 1/2" NPT, **Natural Brass**

CX-647-BK 10.5" Heavy Duty ABS Spike, 1/2" NPT, **Black**

CX-650-BZ 8.5" Slotted ABS Spike with Brass Treads, **Bronze**


Mounting Risers

CX-682B-AB 6" Brass Riser, 1/2 NPT Male/Female, **Antique Bronze**

CX-683B-AB 12" Brass Riser, 1/2 NPT Male/Female, **Antique Bronze**


CX-684B-AB 18" Brass Riser, 1/2 NPT Male/Female, **Antique Bronze**

CX-685B-AB 24" Brass Riser, 1/2 NPT Male/Female, **Antique Bronze**

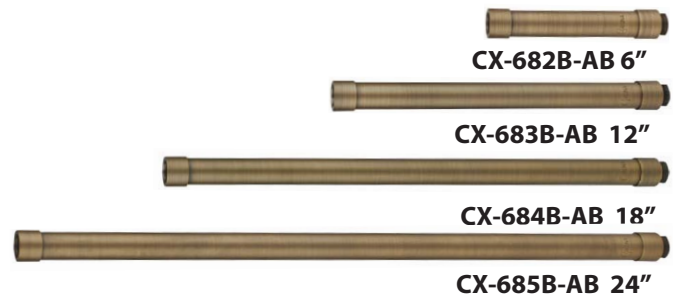

Cable Connectors

CX-LOC Quick-locking Cable Connectors, **Tan**
([Installation Instructions](#))

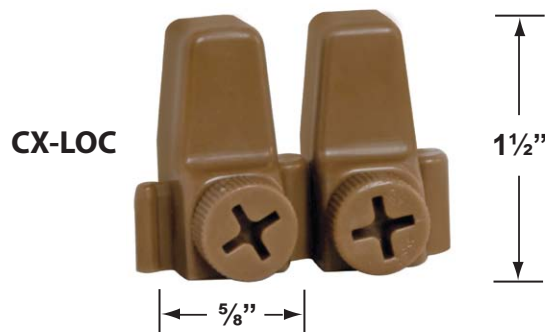

CX-LOC

PRODUCT # : CL-649B-AB

• Area Lights

• Cast Brass

Stainless Steel Pool and Spa Rated Transformers

- T-LT150-Z 150W, 12-15V Smart Zoning Single Circuit
([Spec Sheet](#)) | ([Installation Instructions](#))
- T-LT300-Z 300W, 12-15V Smart Zoning Single Circuit
([Spec Sheet](#)) | ([Installation Instructions](#))
- T-LTF60 60W, 12V, Compact Mini Transformer
- T-LT75 75W, 12 and 15V, Single Circuit Transformer
w/ Integrated Mechanical Timer.
- T-LT150 150W, 12-15V, Single Circuit Transformer.
- T-LT300 300W, 12-15V, Single Circuit Transformer.
- T-LT600 600W, 12-15V, Dual Circuit Transformer.
- T-LT900 900W, 12-22V, Triple Circuit Transformer.
- T-FIDT Field Installed Plug-in Digital Timer.
- T-FIT Field Installed Plug-in Mechanical Timer.
- T-TR-FIP Field Installed Plug-in Photocell



T-LT150-Z



T-LT300



T-FIDT



T-LT300-Z



T-TR-FIP



T-LT150

Dimmers

CX-DIM-100

100W, Low Voltage Dimmer Switch.
Use with T-LT Series Transformers, **Black**



CX-DIM-100