

# SPECIFICATION SHEET

## PRODUCT # : CL-650B-AB

•Area Lights

•Cast Brass

### Fixture Specifications:

**Housing:** Corrosion resistant cast brass.

**Stem:** Solid brass pipe with ½" NPT on bottom.

**Finish:** **AB- Antique Bronze.** Natural toning process. AB finish will vary due to artistic process.

**Lens:** Frosted polycarbonate, cover over lamp providing sprinkler water protection.

**Socket:** Top grade fixed ceramic bi-pin socket. Easy tool free lamp access.



**Lamp:** 12V T3 LED.  
Available in 3W Bluetooth mesh smart RGB-WW or CCT; 2W, 2.5W LED or without lamp.  
See the Lamp Guide below for more information.

**Wiring:** Fixture is prewired with a 3-ft 18-2 direct burial cord. Wire connector sold separately. Quick-locking connectors are available from Corona Lighting (**CX-LOC**) find details on page 2.

**Mounting Spike:** Standard injection molded spike with ½" NPT threaded female hub.

**Electrical Notes:** A remote 12V transformer is required. Options are available from Corona Lighting (see page 3). Voltage range for BT lamps are 9-17V, LED are 8-21V. Proper grease/lubricant is suggested on threaded parts during installation process.

**Warranty:** Limited lifetime warranty on fixture housing and stem against manufacturer's defects.

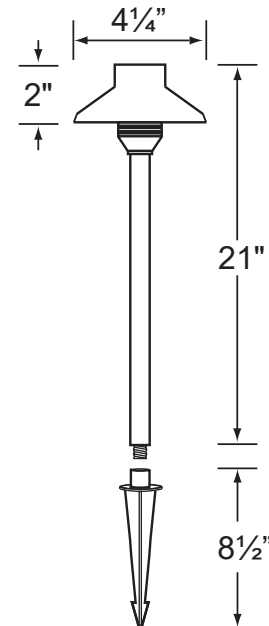

### AVAILABLE LED LAMPS (Corona LED lamps have a five (5) year limited warranty against manufacturer's defects)

| LAMP NUMBER                                                                                       | WATTS   | BEAM SPREAD | LUMEN    | COLOR & TEMP. | RATED HOURS | HALOGEN EQUIVALENT |
|---------------------------------------------------------------------------------------------------|---------|-------------|----------|---------------|-------------|--------------------|
| L-EDT3-2W-BT   | 0.5 - 2 | 360°        | 10 - 120 | 2200K-5700K   | 25,000      | 20W                |
| (Color-Changing, Color Temperature Changing, Zoning, & Dimming)                                   |         |             |          |               |             |                    |
| L-EDT3-2W-CCT  | 0.5 - 2 | 360°        | 10 - 200 | 2200K - 5700K | 25,000      | 20W                |
| (Color Temperature Changing, Zoning, & Dimming)                                                   |         |             |          |               |             |                    |
| L-EDT3-2W                                                                                         | 2       | 360°        | 200      | 2700K         | 25,000      | 20W                |
| L-EDT3-2.5W                                                                                       | 2.5     | 180°        | 240      | 2700K         | 25,000      | 35W                |
| L-EDT3-2W-3K                                                                                      | 2       | 360°        | 210      | 3000K         | 25,000      | 20W                |
| L-EDT3-2.5W-3K                                                                                    | 2.5     | 180°        | 250      | 3000K         | 25,000      | 35W                |
| L-EDT3-AM*                                                                                        | 2       | 360°        | 170      | 2000K         | 25,000      | 20W                |

\* AM- Amber color  
 -Bluetooth connection  
 -Color changing

For more additional Lamps, and accessories visit Coronalighting.com

### JOB INFORMATION

TYPE: DATE:

JOB NAME & ADDRESS:

PRODUCT #:

TOTAL QUANTITY:

LAMP TYPE & WATTAGE:

TRANSFORMER:

CONTRACTOR:

SPECIFIER:

• When ordering a halogen or xenon lamp add lamp number to the product number. If you are ordering LED lamps you should follow the format below:

• **CL** - **product #** - **lamp** - **wattage**

Example: CL-650B-AB-L-EDT3-2W-3K

**CL - 650B-AB - L-EDT3 - 2W-3K**

• Corona Lighting reserves the right to make any change and/or improvement to the design and construction of this fixture without further notification.


## PRODUCT # : CL-650B-AB

• Area Lights

• Cast Brass

### Mounting Pedestals

CX-603-BK 3" PVC Mounting Pedestal, 1/2" NPT Female Brass Hub on top, **Black**



**CX-603-BK**

CX-621-BK 1" PVC Cap, 1/2" NPT, **Black**

CX-622-BK 2" PVC Cap, 1/2" NPT, **Black**

CX-624-BK 3" PVC Cap, 1/2" NPT Female Brass Hub, **Black**

### Mounting Canopies

CX-705B-AB Brass Flat Canopy, 1/2" NPT, **Antique Bronze**


CX-709B-AB Brass Raised Canopy, 1/2" NPT, **Antique Bronze**

CX-718B-AB 5" Brass Canopy, 3-Hole 1/2" NPT, **Antique Bronze**

CX-721B-AB Brass Tree mount Canopy with 15" Rubber Strap stretches to 22", **Antique Bronze**

CX-722B-AB BrassTree Mount Canopy with 22" Rubber Strap stretches to 33", **Antique Bronze**



CX-723B-AB Brass Tree Mount Canopy with 31" Rubber Strap stretches to 45", **Antique Bronze**



**CX-705B-AB**



**CX-709B-AB**



**CX-718B-AB**




**CX-722B-AB**

### Ground Spikes

CX-640-BK 6" Aluminum Spike, 1/2" NPT Male Hub, **Black**

CX-642 8 1/2" h x 1 1/2" w ABS Spike, 1/2" NPT, **Black, Bronze**

CX-643-BZ 8 1/2" h x 3" w ABS Spike, 1/2" NPT, **Bronze**

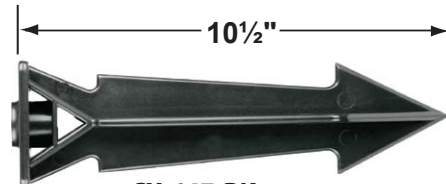

**CX-647-BK**

CX-646-BK 8" ABS Spike, 1/2" NPT, **Black**

CX-646-BR 8" h x 1 1/2" w Brass Spike, 1/2" NPT, **Natural Brass**

CX-647-BK 10.5" Heavy Duty ABS Spike, 1/2" NPT, **Black**

CX-650-BZ 8.5" Slotted ABS Spike with Brass Treads, **Bronze**

### Mounting Risers

CX-682B-AB 6" Brass Riser, 1/2" NPT Male/Female, **Antique Bronze**

CX-683B-AB 12" Brass Riser, 1/2" NPT Male/Female, **Antique Bronze**

CX-684B-AB 18" Brass Riser, 1/2" NPT Male/Female, **Antique Bronze**

CX-685B-AB 24" Brass Riser, 1/2" NPT Male/Female, **Antique Bronze**



**CX-682B-AB 6"**



**CX-683B-AB 12"**



**CX-684B-AB 18"**




**CX-685B-AB 24"**


### Cable Connectors

CX-LOC Quick-locking Cable Connectors, **Tan**  
([Installation Instructions](#))

**CX-LOC**

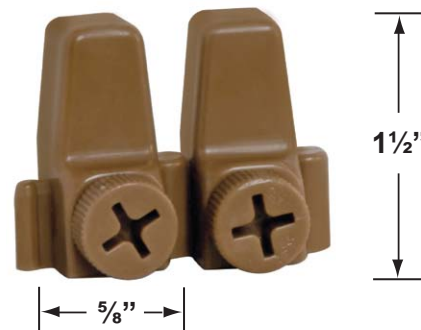

**1 1/2"**



**5/8"**

## PRODUCT # : CL-650B-AB

• Area Lights

• Cast Brass

### Stainless Steel Pool and Spa Rated Transformers

- T-LT150-Z 150W, 12-15V Smart Zoning Single Circuit  
([Spec Sheet](#)) | ([Installation Instructions](#))
- T-LT300-Z 300W, 12-15V Smart Zoning Single Circuit  
([Spec Sheet](#)) | ([Installation Instructions](#))
- T-LTF60 60W, 12V, Compact Mini Transformer
- T-LT75 75W, 12 and 15V, Single Circuit Transformer  
w/ Integrated Mechanical Timer.
- T-LT150 150W, 12-15V, Single Circuit Transformer.
- T-LT300 300W, 12-15V, Single Circuit Transformer.
- T-LT600 600W, 12-15V, Dual Circuit Transformer.
- T-LT900 900W, 12-22V, Triple Circuit Transformer.
- T-FIDT Field Installed Plug-in Digital Timer.
- T-FIT Field Installed Plug-in Mechanical Timer.
- T-TR-FIP Field Installed Plug-in Photocell



T-LT150-Z



T-FIDT



T-LT300-Z



T-LT300



T-TR-FIP



T-LT150

### Dimmers

CX-DIM-100

100W, Low Voltage Dimmer Switch.  
Use with T-LT Series Transformers, **Black**



CX-DIM-100