



WWW.CORONALIGHTING.COM

1633 Staunton Ave
Los Angeles, CA 90021

TEL. FAX.

(800) 727-9262 (800) 727-9957

(213) 747-4500 (213) 747-3234

ARCHITECTURAL GRADE SERIES

SPECIFICATION SHEET

E-Mail: sales@coronalighting.com

PRODUCT # : CL-717B-BK

• Path Lights

• Cast Brass

Fixture Specifications:

Housing: Corrosion resistant Solid Brass "L" shaped design

Stem: Solid brass pipe with 1/2" NPT on bottom

Finish: **B-BK- Black Brass.**
Also in **AB, GM** and **SI** finishes. Aluminum options available in **BK** and **BZ**

Lens: High impact, sandblasted, heat resistant clear glass. Extra frosted and linear lenses included.

Socket: Top grade fixed ceramic bi-pin socket. Easy tool-free lamp access.

Lamp: Designed to use a 12V, T3 LED lamp only. Available in LED (2W & 2.5W) or without lamp. See the Lamp Guide below for more information. Not to be used with halogen/xenon lamps.

Wiring:

Fixture is prewired with a 3ft, 18-2 direct burial cord Wire connector sold separately. Universal connector (**CX-839**) and silicone filled wire nut (**CX-854**) are available from Corona Lighting.

Mounting Spike:


Standard injection molded spike with 1/2" NPT threaded female hub.

Electrical Notes:

A remote 12V transformer is required. Options are available from Corona Lighting. Voltage range for LED lamps are 8V-21V. Proper grease/lubricant is suggested on threaded parts during installation process.

Warranty:

Limited lifetime warranty on fixture housing against manufacturer's defects.

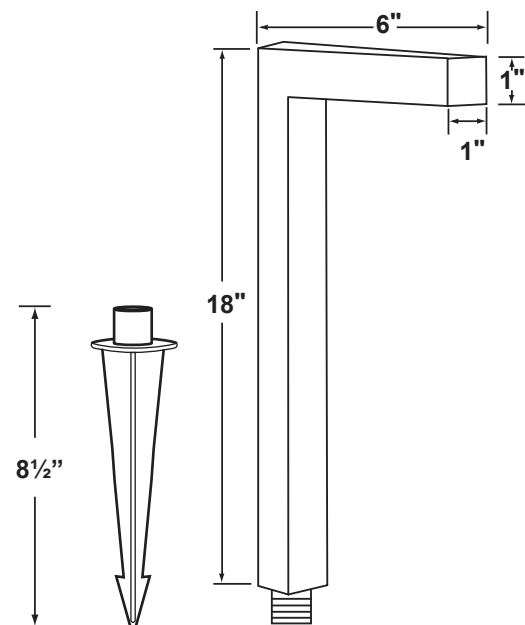

AVAILABLE LED LAMPS (Corona LED lamps have a five (5) year limited warranty against manufacturer's defects)

LAMP NUMBER	WATTS	BEAM		COLOR & TEMP.	RATED HOURS	HALOGEN EQUIVALENT
		SPREAD	LUMEN			
L-EDT3-2W	2	360°	200	2700K	25,000	20 Watt
L-EDT3-2.5W	2.5	180°	240	2700K	25,000	35 Watt
L-EDT3-2W-3K	2	360°	210	3000K	25,000	20 Watt
L-EDT3-2.5W-3K	2.5	180°	250	3000K	25,000	35 Watt
L-EDT3-AM*	2	360°	170	2000K	25,000	20 Watt

* AM- Amber color

For more additional Lamps, and accessories visit Coronalighting.com

JOB INFORMATION

TYPE: DATE:

JOB NAME & ADDRESS:

PRODUCT #:

TOTAL QUANTITY:

LAMP TYPE & WATTAGE:

TRANSFORMER:

CONTRACTOR:

SPECIFIER:

• When ordering LED lamp with a fixture your part number should follow the format below:

• **CL** - **product #** - **lamp** - **wattage**

Example: CL-717B-BK-L-EDT3-2W-3K

CL - **717B-BK** - **L-EDT3** - **2W-3K**

• Corona Lighting reserves the right to make any change and/or improvement to the design and construction of this fixture without further notification.

ACCESSORIES SHEET


PRODUCT # : CL-717B-BK

• Path Lights

• Cast Brass

Mounting Pedestals

CX-603-BK 3" PVC Mounting Pedestal, 1/2" NPT Female Brass Hub on top, **Black**

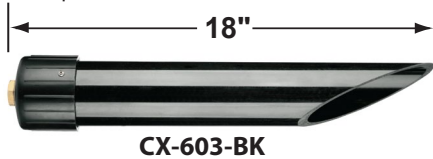


Ground Spikes

CX-642-BK 8.5" ABS Spike, 1/2" NPT, **Black**

CX-642-BZ 8.5" ABS Spike, 1/2" NPT, **Bronze**

CX-643-BZ 8.5" ABS Spike, 1/2" NPT, **Bronze**

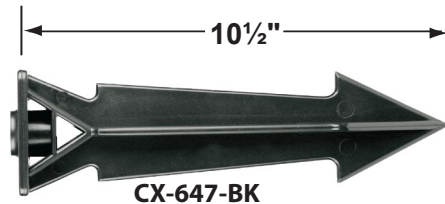

Mounting Canopies

CX-701-BK Aluminum Mini 3 Hole Round Canopy, 1/2" NPT, **Black**

CX-702-BK Aluminum Rectangular Canopy, 1/2" NPT, **Black**

CX-709-BK Aluminum Raised Canopy, 1/2" NPT, **Black**

CX-718-BK 5" Aluminum Canopy, 3-Hole 1/2" NPT, **Black**

CX-721-BK Aluminum Tree mount Canopy with 15" Rubber Strap stretches to 22", **Black**

CX-722-BK Aluminum Tree mount Canopy with 22" Rubber Strap stretches to 33", **Black**

CX-723-BK Aluminum Tree mount Canopy with 31" Rubber Strap stretches to 45", **Black**

CX-646-BK 8" ABS Spike, 1/2" NPT, **Black**

CX-646-BR 8" ABS Spike, 1/2" NPT, **Natural Brass**

CX-646-SS 8" ABS Spike, 1/2" NPT, **Stainless Steel**

CX-647-BK 10.5" Heavy Duty ABS Spike, 1/2" NPT, **Black**



CX-718-BK



Cable Connectors

CX-854 Direct Burial Silicone Filled Wire Nut, **Tan**

CX-858 Speedy Cable Connector, Supply Cable up to 10-2, **Black**

CX-839 Universal cable connector, Supply cable up to 8-2, one/Pack **Black**

CX-854




PRODUCT # : CL-717B-BK

• Path Lights

• Cast Brass

Stainless Steel Pool and Spa Rated Transformers

- T-LTF60 60W, 12V, Compact Mini Transformer
- T-LT75 75W, 12 and 15V, Single Circuit Transformer w/ Integrated Mechanical Timer.
- T-LT150 150W, 12-15V, Single Circuit Transformer.
- T-LT300 300W, 12-15V, Single Circuit Transformer.
- T-LT600 600W, 12-15V, Dual Circuit Transformer.
- T-LT900 900W, 12-22V, Triple Circuit Transformer.
- T-FIDT Field Installed Plug-in Digital Timer.
- T-FIT Field Installed Plug-in Mechanical Timer.
- T-TR-FIP Field Installed Plug-in Photocell

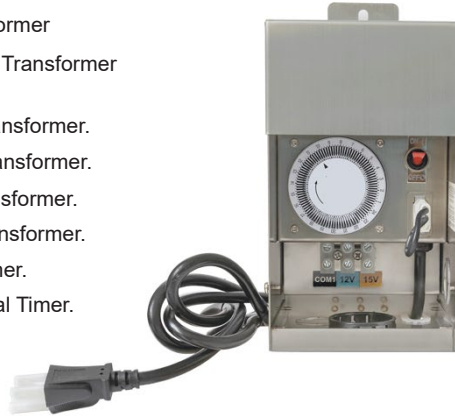

T-LT75




T-LT150



T-FIDT



T-LT300



T-TR-FIP

Dimmers

- CX-DIM-100 100W, Low Voltage Dimmer Switch.
Use with T-LT Series Transformers, **Black**



CX-DIM-100