

SPECIFICATION SHEET

PRODUCT # : CL-801-D-BK

•Flexible BBQ- Deck Light

•Aluminum & Steel


Fixture Specifications:

Head: Diecast aluminum, wedge shaped head.
Arm: Flexible steel black polyolefin shrink wrap arm, in 12", 24", and 36" lengths.
Finish: Polyester UV powder coated, in **BK-** Black
Lens: Clear, tempered and heat resistant glass.
Socket: Top grade, bi-pin socket
Lamp: 12V T3 LED.
Available in 3W Bluetooth Mesh smart RGB-WW; 2W, 2.5W LED or without lamp.
See the Lamp Guide below for more information.
Mounting: 3" round aluminum base canopy with on/off push button covered by rubber boot.


Wiring: Fixture is prewired with a 3ft direct burial cable. Wire connector sold separately. Quick-locking connectors (**CX-LOC**) are available from Corona Lighting, see page 2 for details.
Electrical Notes: A remote 12V transformer is required. Options are available from Corona Lighting find options on page 2. Voltage range for BT lamps are 9-17V, LED are 8-21V. Some assembly needed. Proper grease/lubricant is suggested on threaded parts during installation.
Warranty: One (1) year warranty on fixture against manufacturer's defects.



CL-801-D-BK-24 Shown

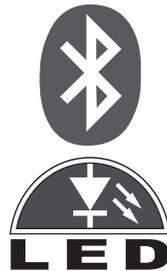

2W and 2.5W

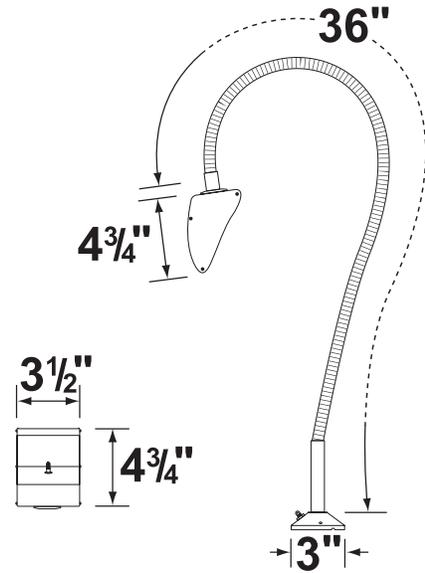

AVAILABLE LED LAMPS (Corona LED lamps have a five (5) year limited warranty against manufacturer's defects)

LAMP NUMBER	WATTS	BEAM		COLOR & TEMP.	RATED HOURS	HALOGEN EQUIVALENT
		SPREAD	LUMEN			
L-EDT3-3W-BT ✱	0.5-3	360°	10-200	2200K-5700K	50,000	---
L-EDT3-2W	2	360°	200	2700K	25,000	20 Watt
L-EDT3-2.5W	2.5	180°	240	2700K	25,000	35 Watt
L-EDT3-2W-3K	2	360°	210	3000K	25,000	20 Watt
L-EDT3-2.5W-3K	2.5	180°	250	3000K	25,000	35 Watt
L-EDT3-AM✱	2	360°	170	2000K	25,000	20 Watt

✱AM- Amber color
For more additional Lamps, and accessories visit Coronalighting.com

JOB INFORMATION

TYPE: _____ DATE: _____
 JOB NAME & ADDRESS: _____
 PRODUCT #: _____
 TOTAL QUANTITY: _____
 LAMP TYPE & WATTAGE: _____
 TRANSFORMER: _____
 CONTRACTOR: _____
 SPECIFIER: _____

• If you are ordering LED lamps you should follow the format below:

• CL - product # - Length - lamp - wattage
 CL - 801-D-BK - 24 - L-EDT3 - 2W-3K

Example: CL-801-D-BK-24-L-EDT3-2W-3K

• Corona Lighting reserves the right to make any change and/or improvement to the design and construction of this fixture without further notification.

PRODUCT # : CL-801-D-BK

•Flexible BBQ- Deck Light

•Aluminum & Steel

Stainless Steel Pool and Spa Rated Transformers

- T-LTF60 60W, 12V, Compact Mini Transformer
- T-LT75 75W, 12 and 15V, Single Circuit Transformer w/ Integrated Mechanical Timer.
- T-LT150 150W, 12-15V, Single Circuit Transformer.
- T-LT300 300W, 12-15V, Single Circuit Transformer.
- T-LT600 600W, 12-15V, Dual Circuit Transformer.
- T-LT900 900W, 12-22V, Triple Circuit Transformer.
- T-FIDT Field Installed Plug-in Digital Timer.
- T-FIT Field Installed Plug-in Mechanical Timer.
- T-TR-FIP Field Installed Plug-in Photocell



T-LT75



T-LT150



T-LT300



T-FIDT



T-TR-FIP

Dimmers


- CX-DIM-100 100W, Low Voltage Dimmer Switch. Use with T-LT Series Transformers, **Black**



CX-DIM-100

Cable Connectors

- CX-LOC Quick-locking Cable Connectors, **Tan** ([Installation Instructions](#))

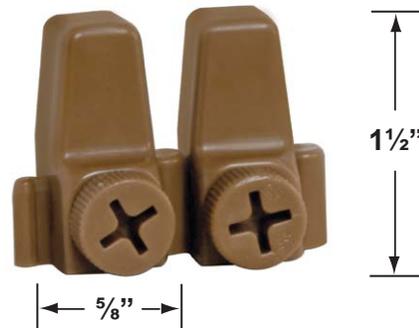

CX-LOC