

SPECIFICATION SHEET

PRODUCT # : CL-801-F-BK

• Flexible Garden Light

• Aluminum & Steel

Fixture Specifications:



Head: Diecast aluminum, wedge shaped head.
Arm: Flexible steel black polyolefin shrink wrap arm, in 12", 24", and 36" lengths.
Finish: Polyester UV powder coated, in **BK- Black**
Lens: Clear, tempered and heat resistant glass.
Socket: Top grade bi-pin socket.
Lamp: 12V T3 LED.
 Available in 3W Bluetooth Mesh Smart RGB-WW; 2W, 2.5W LED or without lamp.
 See the Lamp Guide below for more information.

Wiring: Fixture is prewired with a 3ft direct burial cable. Wire connector sold separately.
 Quick-locking connectors (**CX-LOC**) are available from Corona Lighting.

Electrical Notes: A remote 12V transformer is required. Options are available from Corona Lighting.
 Voltage range for BT lamps are 9-17V, LED are 8-21V. Some assembly needed. Proper grease/lubricant is suggested on threaded parts during installation.

Warranty: One (1) year warranty on fixture against Manufacturer's defects.

Mounting: Standard injection-molded ground spike with 1/2" NPT hub on bottom.

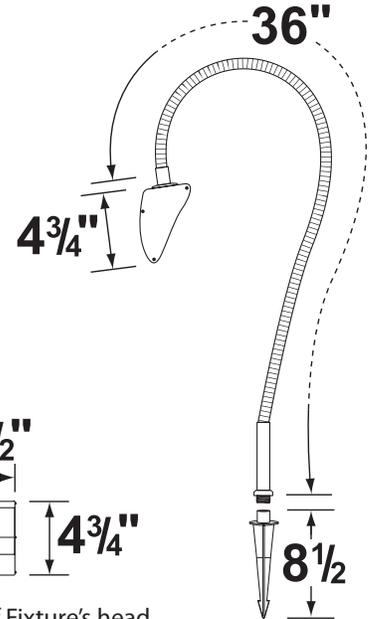

Top of Fixture's head

AVAILABLE LED LAMPS (Corona LED lamps have a five (5) year limited warranty against manufacturer's defects)

LAMP NUMBER	WATTS	BEAM		COLOR & TEMP.	RATED HOURS	HALOGEN EQUIVALENT
		SPREAD	LUMEN			
L-EDT3-3W-BT	0.5-3	360°	10-200	2200K-5700K	50,000	---
L-EDT3-2W	2	360°	200	2700K	25,000	20 Watt
L-EDT3-2.5W	2.5	180°	240	2700K	25,000	35 Watt
L-EDT3-2W-3K	2	360°	210	3000K	25,000	20 Watt
L-EDT3-2.5W-3K	2.5	180°	250	3000K	25,000	35 Watt
L-EDT3-AM*	2	360°	170	2000K	25,000	20 Watt

*AM- Amber color
 For more additional Lamps, and accessories visit Coronalighting.com

JOB INFORMATION

TYPE: _____ DATE: _____
 JOB NAME & ADDRESS: _____
 PRODUCT #: _____
 TOTAL QUANTITY: _____
 LAMP TYPE & WATTAGE: _____
 TRANSFORMER: _____
 CONTRACTOR: _____
 SPECIFIER: _____

• If you are ordering LED lamps you should follow the format below:

• CL - **product #** - **Length** - **lamp** - **wattage**
 CL - 801-F-BK - 24 - L-EDT3 - 2W-3K

Example: CL-801-F-BK-24-L-EDT3-2W-3K

• Corona Lighting reserves the right to make any change and/or improvement to the design and construction of this fixture without further notification.

ACCESSORIES SHEET


PRODUCT # : CL-801-F-BK

• Flexible Garden Light

• Aluminum & Steel

Mounting Pedestals

CX-603-BK 3" PVC Mounting Pedestal, 1/2" NPT Female Brass Hub on top, **Black**

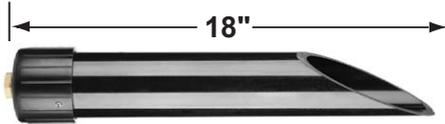

CX-603-BK

CX-621-BK 1" PVC Cap, 1/2" NPT, **Black**


CX-622-BK 2" PVC Cap, 1/2" NPT, **Black**

CX-624-BK 3" PVC Cap, 1/2" NPT Female Brass Hub, **Black**

Cable Connectors

CX-LOC Quick-locking Cable Connectors, **Tan**
[\(Installation Instructions\)](#)

CX-LOC

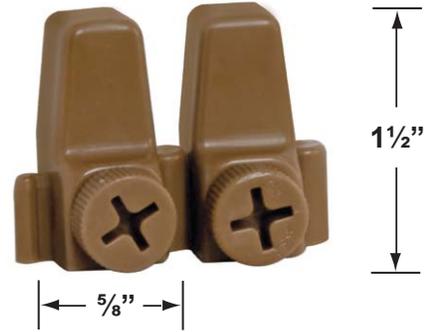


Ground Spikes

CX-640-BK 6" Aluminum Spike, 1/2" NPT Male Hub, **Black**

CX-642 8 1/2" h x 1/2" w ABS Spike, 1/2" NPT, **Black, Bronze**

CX-643-BZ 8 1/2" h x 3" w ABS Spike, 1/2" NPT, **Bronze**

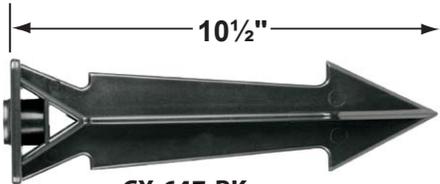

CX-647-BK

CX-646-BK 8" ABS Spike, 1/2" NPT, **Black**

CX-646-BR 8" h x 1/2" w Brass Spike, 1/2" NPT, **Natural Brass**

CX-647-BK 10.5" Heavy Duty ABS Spike, 1/2" NPT, **Black**

CX-650-BZ 8.5" Slotted ABS Spike with Brass Treads, **Bronze**

Stainless Steel Pool and Spa Rated Transformers

T-LTF60 60W, 12V, Compact Mini Transformer

T-LT75 75W, 12 and 15V, Single Circuit Transformer w/ Integrated Mechanical Timer.

T-LT150 150W, 12-15V, Single Circuit Transformer.

T-LT300 300W, 12-15V, Single Circuit Transformer.

T-LT600 600W, 12-15V, Dual Circuit Transformer.

T-LT900 900W, 12-22V, Triple Circuit Transformer.

T-FIDT Field Installed Plug-in Digital Timer.

T-FIT Field Installed Plug-in Mechanical Timer.

T-TR-FIP Field Installed Plug-in Photocell



T-LT300



T-TR-FIP



T-FIDT



T-LT75