

# SPECIFICATION SHEET

## PRODUCT # : CL-806-D-SI

• Flexible B.B.Q.- Deck Light

• Steel

### Fixture Specifications:

**Head:** Solid brass bell head.

**Arm:** Flexible steel arm, available in 24" and 36" lengths.

**Finish:** Chrome plated fixture and flexible arm  
Available in **SI- Silver**

**Lens:** None

**Socket:** Top grade, single contact socket

**Lamp:** 12V S.C Bayonet LED.  
Available in 3W Bluetooth Mesh smart RGB-WW; 2W, 2.5W LED or without lamp.  
See the Lamp Guide below for more information.

**Mounting:** 3" round aluminum base canopy, chrome plated, with on/off push button covered by rubber boot


**Wiring:** Fixture is prewired with a 3ft direct burial cable. Wire connector sold separately.  
Quick-locking connectors (**CX-LOC**) are available from Corona Lighting, see page 2 for details.

**Electrical Notes:** A remote 12V transformer is required. Options are available from Corona Lighting. Find options on page 2. Voltage range for BT lamps are 9-17V, LED are 8-21V. Some assembly needed. Proper grease /lubricant is suggested on threaded parts during installation.


**Warranty:** One (1) year warranty on fixture housing against manufacturer's defects.



CL-806-D-SI-36 shown



2W and 2.5W

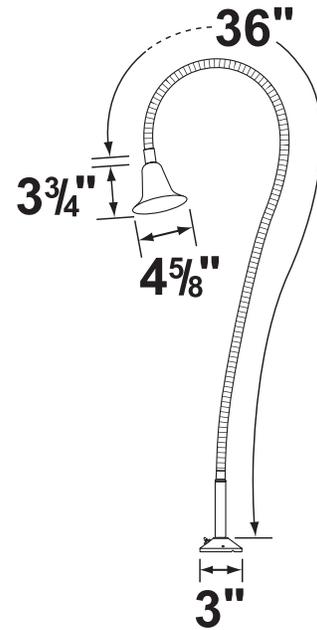

### AVAILABLE LED LAMPS (Corona LED lamps have a five (5) year limited warranty against manufacturer's defects)

LAMP NUMBER	WATTS	BEAM		COLOR & TEMP.	RATED HOURS	HALOGEN EQUIVALENT
		SPREAD	LUMEN			
L-EDBA-3W-BT	0.5-3	360°	10-200	2200K - 5700K	50,000	---
L-EDBA-2W	2	360°	200	2700K	25,000	20 Watt
L-EDBA-2.5W	2.5	180°	240	2700K	25,000	35 Watt
L-EDBA-2W-3K	2	360°	210	3000K	25,000	20 Watt
L-EDBA-2.5W-3K	2.5	180°	250	3000K	25,000	35 Watt
L-EDBA-AM*	2	360°	170	2000K	25,000	20 Watt

\* AM- Amber color  
For more additional Lamps, and accessories visit [Coronalighting.com](http://Coronalighting.com)

### JOB INFORMATION

TYPE: \_\_\_\_\_ DATE: \_\_\_\_\_

JOB NAME & ADDRESS: \_\_\_\_\_

PRODUCT #: \_\_\_\_\_

TOTAL QUANTITY: \_\_\_\_\_

LAMP TYPE & WATTAGE: \_\_\_\_\_

TRANSFORMER: \_\_\_\_\_

CONTRACTOR: \_\_\_\_\_

SPECIFIER: \_\_\_\_\_

• If you are ordering LED lamps you should follow the format below:

• CL - **product #** - **Length** - **lamp** - **wattage**  
CL - 806-D-SI - 36 - L-EDBA - 2W-3K

Example: CL-806-D-SI-36-L-EDBA-2W-3K

• Corona Lighting reserves the right to make any change and/or improvement to the design and construction of this fixture without further notification.

## PRODUCT # : CL-806-D-SI

• Flexible B.B.Q.- Deck Light

• Steel

### Stainless Steel Pool and Spa Rated Transformers

- T-LTF60 60W, 12V, Compact Mini Transformer
- T-LT75 75W, 12 and 15V, Single Circuit Transformer w/ Integrated Mechanical Timer.
- T-LT150 150W, 12-15V, Single Circuit Transformer.
- T-LT300 300W, 12-15V, Single Circuit Transformer.
- T-LT600 600W, 12-15V, Dual Circuit Transformer.
- T-LT900 900W, 12-22V, Triple Circuit Transformer.
- T-FIDT Field Installed Plug-in Digital Timer.
- T-FIT Field Installed Plug-in Mechanical Timer.
- T-TR-FIP Field Installed Plug-in Photocell



T-LT75



T-LT150



T-LT300



T-FIDT



T-TR-FIP

### Dimmers


- CX-DIM-100 100W, Low Voltage Dimmer Switch.  
Use with T-LT Series Transformers, **Black**



CX-DIM-100

### Cable Connectors

- CX-LOC Quick-locking Cable Connectors, **Tan**  
([Installation Instructions](#))

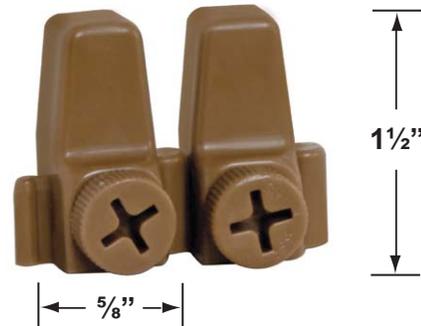

CX-LOC

1 1/2"

5/8"