

# SPECIFICATION SHEET

## PRODUCT # : CL-806-F

• Flexible Garden Light

• Steel

### Fixture Specifications:



**Head:** Solid brass bell.  
**Arm:** Flexible steel arm, available in 24" and 36" lengths  
**Finish:** Chrome plated fixture and flexible arm, available in SI- Silver  
**Lens:** None  
**Socket:** Top grade single contact bayonet socket tools-free easy access.  
**Lamp:** 12V S.C Bayonet LED.  
 Available in 3W Bluetooth Mesh Smart RGB-WW; 2W, 2.5W LED or without lamp.  
 See the Lamp Guide below for more information.

**Wiring:** Fixture is prewired with a 3ft direct burial cable. Wire connector sold separately.  
 Quick-locking connectors (**CX-LOC**) are available from Corona Lighting, see page 2 for details.

**Electrical Notes:** A remote 12V transformer is required. Find options on page 2.  
 Voltage range for BT lamps are 9-17V, LED are 8-21V. Some assembly needed. Proper grease/lubricant is suggested on threaded parts during installation.

**Warranty:** One (1) year warranty on fixture housing and stem against manufacturer's defects.

**Mounting:** Standard injection molded spike with 1/2" NPT threaded female hub.

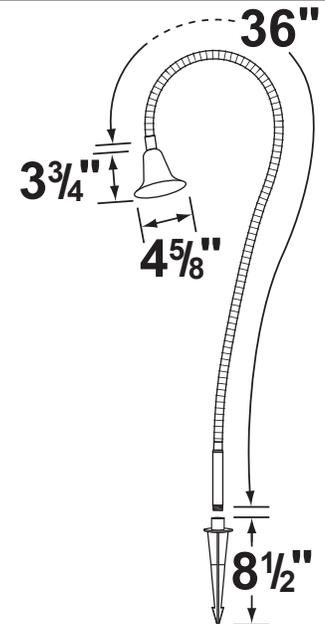

### AVAILABLE LED LAMPS (Corona LED lamps have a five (5) year limited warranty against manufacturer's defects)

LAMP NUMBER	WATTS	BEAM		COLOR & TEMP.	RATED HOURS	HALOGEN EQUIVALENT
		SPREAD	LUMEN			
L-EDBA-3W-BT	0.5-3	360°	10-200	2200K - 5700K	50,000	---
L-EDBA-2W	2	360°	200	2700K	25,000	20 Watt
L-EDBA-2.5W	2.5	180°	240	2700K	25,000	35 Watt
L-EDBA-2W-3K	2	360°	210	3000K	25,000	20 Watt
L-EDBA-2.5W-3K	2.5	180°	250	3000K	25,000	35 Watt
L-EDBA-AM*	2	360°	170	2000K	25,000	20 Watt

\* AM- Amber color  
 For more additional Lamps, and accessories visit [Coronalighting.com](http://Coronalighting.com)

### JOB INFORMATION

TYPE: DATE:

JOB NAME & ADDRESS:

PRODUCT #:

TOTAL QUANTITY:

LAMP TYPE & WATTAGE:

TRANSFORMER:

CONTRACTOR:

SPECIFIER:

• If you are ordering LED lamps you should follow the format below:

• CL - product # - Length - lamp - wattage  
 CL - 806-F-SI - 12 - L-EDBA - 2W-3K

Example: CL-806-F-SI-12-L-EDBA-2W-3K

• Corona Lighting reserves the right to make any change and/or improvement to the design and construction of this fixture without further notification.


## PRODUCT # : CL-806-F

• Flexible Garden Light

• Steel

### Mounting Pedestals

CX-603-BK 3" PVC Mounting Pedestal, 1/2" NPT Female Brass Hub on top, **Black**

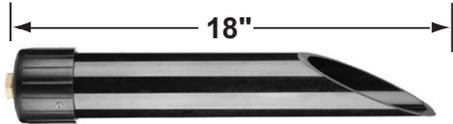

CX-603-BK


CX-621-BK 1" PVC Cap, 1/2" NPT, **Black**

CX-622-BK 2" PVC Cap, 1/2" NPT, **Black**

CX-624-BK 3" PVC Cap, 1/2" NPT Female Brass Hub, **Black**

### Cable Connectors

CX-LOC Quick-locking Cable Connectors, **Tan**  
[\(Installation Instructions\)](#)

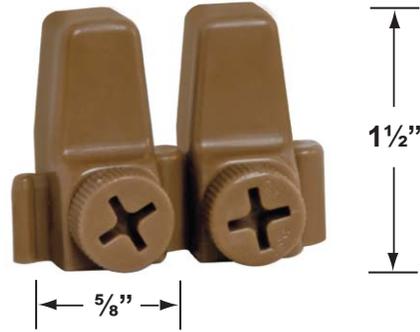


CX-LOC

### Ground Spikes

CX-640-BK 6" Aluminum Spike, 1/2" NPT Male Hub, **Black**

CX-642 8 1/2" h x 1/2" w ABS Spike, 1/2" NPT, **Black, Bronze**

CX-643-BZ 8 1/2" h x 3" w ABS Spike, 1/2" NPT, **Bronze**

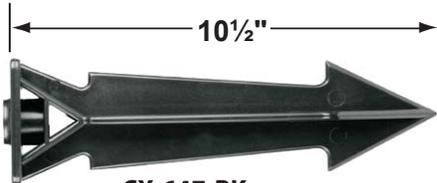

CX-647-BK

CX-646-BK 8" ABS Spike, 1/2" NPT, **Black**

CX-646-BR 8" h x 1/2" w Brass Spike, 1/2" NPT, **Natural Brass**

CX-647-BK 10.5" Heavy Duty ABS Spike, 1/2" NPT, **Black**

CX-650-BZ 8.5" Slotted ABS Spike with Brass Treads, **Bronze**

### Stainless Steel Pool and Spa Rated Transformers

T-LTF60 60W, 12V, Compact Mini Transformer

T-LT75 75W, 12 and 15V, Single Circuit Transformer w/ Integrated Mechanical Timer.

T-LT150 150W, 12-15V, Single Circuit Transformer.

T-LT300 300W, 12-15V, Single Circuit Transformer.

T-LT600 600W, 12-15V, Dual Circuit Transformer.

T-LT900 900W, 12-22V, Triple Circuit Transformer.

T-FIDT Field Installed Plug-in Digital Timer.

T-FIT Field Installed Plug-in Mechanical Timer.

T-TR-FIP Field Installed Plug-in Photocell



T-LT300



T-TR-FIP



T-FIDT



T-LT75