

SPECIFICATION SHEET

PRODUCT # : CL-807-D-SI

•Flexible BBQ- Deck Light

• Steel & Aluminum

Fixture Specifications:

Head: Diecast aluminum head, chrome plated
Arm: Flexible steel arm, available in 24" and 36" lengths.
Finish: Chrome plated fixture, in **SI- Silver Plated** finish.
Lens: Clear, tempered and heat resistant glass.
Socket: Top grade bi pin socket
Lamp: 12V, MR-16 LED
Available in 5W Bluetooth mesh smart RGB-WW;
3.5W, 5W, 6W LED or without lamp.
See lamp guide, below for more information.

Wiring: Fixture is prewired with a 3ft direct burial cable.
Wire connector sold separately.
Quick-locking connectors (**CX-LOC**) are available from Corona Lighting, see page 2 for details


Electrical Notes: A remote 12V transformer is required. Find options on Page 2. Voltage range for BT/LED lamps are 9V-17V. Some assembly needed. Proper grease/lubricant is suggested on threaded parts during installation.

Warranty: One (1) year warranty on fixture housing against manufacturer's defects.


Mounting: 3" round cast aluminum base canopy, chrome plated with on/off push button covered by rubber boot.



CL-807-D-SI-36 shown



3.5W, 5W & 6W

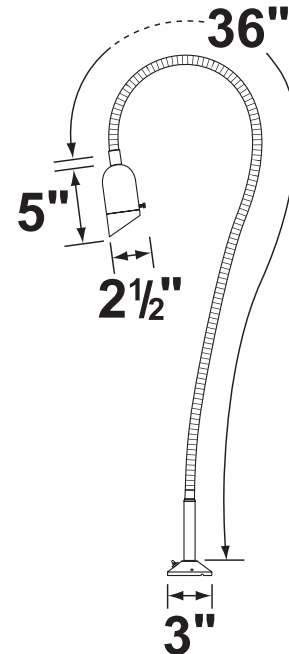

AVAILABLE LED LAMPS (Corona LED lamps have a five (5) year limited warranty against manufacturer's defects)

LAMP NUMBER	WATTS	BEAM		COLOR & TEMP.	RATED HOURS	HALOGEN EQUIVALENT
		SPREAD	LUMEN			
L-ED16-5W-BT	1-5	15° / 38° / 60°	25-530	2200K-5700K	50,000	---
L-ED16-3W / 5W-SP	3.5 / 5	15° Spot	270 / 350	2700K	50,000	25 / 40 Watt
L-ED16-3W / 5W-FL	3.5 / 5	45° Flood	270 / 350	2700K	50,000	25 / 40 Watt
L-ED16-3W / 5W-WF	3.5 / 5	60° Wide Flood	270 / 350	2700K	50,000	25 / 40 Watt
L-ED16-COB5W-SP / 3K	5	15° Spot	450 / 470	2700K / 3000K	50,000	50 Watt
L-ED16-COB5W-FL / 3K	5	38° Flood	450 / 470	2700K / 3000K	50,000	50 Watt
L-ED16-COB5W-WF / 3K	5	60° Wide Flood	450 / 470	2700K / 3000K	50,000	50 Watt
L-ED16-6W-SP / 3K	6	15° Spot	600	2700K / 3000K	50,000	75 Watt
L-ED16-6W-FL / 3K	6	38° Flood	600	2700K / 3000K	50,000	75 Watt
L-ED16-6W-WF / 3K	6	60° Wide Flood	600	2700K / 3000K	50,000	75 Watt

■5W Single color MR-16 LED available in AMBER, BLUE, GREEN, PURPLE, RED and VIOLET

JOB INFORMATION

TYPE: DATE:

JOB NAME & ADDRESS:

PRODUCT #:

TOTAL QUANTITY:

LAMP TYPE & WATTAGE:

TRANSFORMER:

CONTRACTOR:

SPECIFIER:

• When ordering LED lamp with a fixture your part number should follow the format below:

• CL - product # - Length - lamp - wattage - lamp angle

CL - 807-D-SI - 36 - L-ED16 - 5W - FL

Example: CL-807-D-SI-36-L-ED16-5W-FL

• Corona Lighting reserves the right to make any change and/or improvement to the design and construction of this fixture without further notification.

ARCHITECTURAL GRADE SERIES

ACCESSORIES SHEET

PRODUCT # : CL-807-D-SI

•Flexible BBQ- Deck Light

• Steel & Aluminum

Stainless Steel Pool and Spa Rated Transformers

T-LTF60	60W, 12V, Compact Mini Transformer
T-LT75	75W, 12 and 15V, Single Circuit Transformer w/ Integrated Mechanical Timer.
T-LT150	150W, 12-15V, Single Circuit Transformer.
T-LT300	300W, 12-15V, Single Circuit Transformer.
T-LT600	600W, 12-15V, Dual Circuit Transformer.
T-LT900	900W, 12-22V, Triple Circuit Transformer.
T-FIDT	Field Installed Plug-in Digital Timer.
T-FIT	Field Installed Plug-in Mechanical Timer.
T-TR-FIP	Field Installed Plug-in Photocell



T-FIDT



T-TR-FIP



T-LT75



T-LT300



T-LT150

Special Lenses & Honeycomb Louvers

CX-238	MR-16 Snap-on holder, Silver Plated
CX-239	MR-16 honeycomb louver, Black
CX-240-AM	MR-16 color lens, Amber
CX-240-BL	MR-16 color lens, Blue
CX-240-GR	MR-16 color lens, Green
CX-240-RD	MR-16 color lens, Red
CX-240-YL	MR-16 color lens, Yellow
CX-241	MR-16 lens, Linear Spread
CX-242	MR-16 lens, Frosted
CX-243	MR-16 lens, Prismatic

•For MR-16 Lenses and Louvers, you will need the CX-238



Cable Connectors

CX-LOC Quick-locking Cable Connectors, **Tan**
([Installation Instructions](#))

CX-LOC

