

SPECIFICATION SHEET

PRODUCT # : CL-807-D-BK

•Flexible BBQ- Deck Light

•Aluminum & Steel

Fixture Specifications:

Head: Diecast aluminum

Arm: Flexible steel black polyolefin shrink wrap arm, available in 12", 24", and 36" length.

Finish: Polyester UV powder coated, with **BK- Black** finish
Also available in **SI- Silver Plated**

Lens: Clear, tempered and heat resistant glass.

Socket: Top grade bi-pin socket

Lamp: 12V, MR-16 LED
Available in 5W Bluetooth mesh smart RGB-WW;
3.5W, 5W, 6W LED or without lamp.
See lamp guide, below for more information..

Wiring: Fixture is prewired with a 3ft direct burial cable. Wire connector sold separately. Quick-locking connectors (**CX-LOC**) are available from Corona Lighting, see page 2 for details


Electrical Notes: A remote 12V transformer is required. Find options on page 2. Voltage range for BT/LED lamps are 9V-17V. Some assembly needed. Proper grease/lubricant is suggested on threaded parts during installation.

Warranty: One (1) year warranty on fixture against manufacturer's defects.


Mounting: 3" round cast aluminum base canopy, chrome plated with on/off push button covered by rubber boot.



CL-807-D-BK-36 is shown

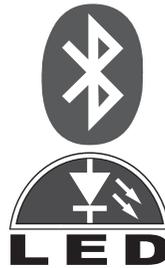

LED
3.5W, 5W & 6W

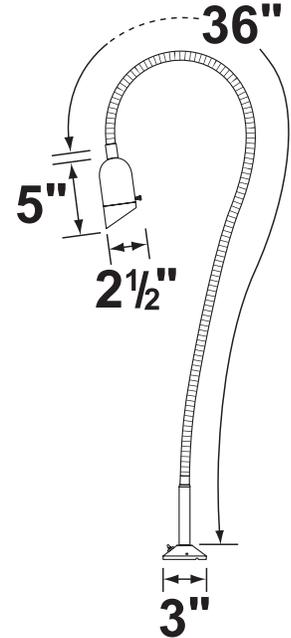

AVAILABLE LED LAMPS (Corona LED lamps have a five (5) year limited warranty against manufacturer's defects)

LAMP NUMBER	WATTS	BEAM		COLOR & TEMP.	RATED HOURS	HALOGEN EQUIVALENT
		SPREAD	LUMEN			
L-ED16-5W-BT	1-5	15° / 38° / 60°	25-530	2200K-5700K	50,000	---
L-ED16-3W / 5W-SP	3.5 / 5	15° Spot	270 / 350	2700K	50,000	25 / 40 Watt
L-ED16-3W / 5W-FL	3.5 / 5	45° Flood	270 / 350	2700K	50,000	25 / 40 Watt
L-ED16-3W / 5W-WF	3.5 / 5	60° Wide Flood	270 / 350	2700K	50,000	25 / 40 Watt
L-ED16-COB5W-SP / 3K	5	15° Spot	450 / 470	2700K / 3000K	50,000	50 Watt
L-ED16-COB5W-FL / 3K	5	38° Flood	450 / 470	2700K / 3000K	50,000	50 Watt
L-ED16-COB5W-WF / 3K	5	60° Wide Flood	450 / 470	2700K / 3000K	50,000	50 Watt
L-ED16-6W-SP / 3K	6	15° Spot	600	2700K / 3000K	50,000	75 Watt
L-ED16-6W-FL / 3K	6	38° Flood	600	2700K / 3000K	50,000	75 Watt
L-ED16-6W-WF / 3K	6	60° Wide Flood	600	2700K / 3000K	50,000	75 Watt

■ 5W Single color MR-16 LED available in AMBER, BLUE, GREEN, PURPLE, RED and VIOLET

• When ordering LED lamp with a fixture your part number should follow the format below:

• **CL** - **product #** - **Length** - **lamp** - **wattage** - **lamp angle**
CL - 807-D-BK - 36 - L-ED16 - 5W - FL

Example: CL-807-D-BK-36-L-ED16-5W-FL

• Corona Lighting reserves the right to make any change and/or improvement to the design and construction of this fixture without further notification.

JOB INFORMATION

TYPE: _____ DATE: _____

JOB NAME & ADDRESS:

PRODUCT #:

TOTAL QUANTITY:

LAMP TYPE & WATTAGE:

TRANSFORMER:

CONTRACTOR:

SPECIFIER:

ACCESSORIES SHEET

PRODUCT # : CL-807-D-BK

•Flexible BBQ- Deck Light

•Aluminum & Steel

Stainless Steel Pool and Spa Rated Transformers

- T-LTF60 60W, 12V, Compact Mini Transformer
- T-LT75 75W, 12 and 15V, Single Circuit Transformer w/ Integrated Mechanical Timer.
- T-LT150 150W, 12-15V, Single Circuit Transformer.
- T-LT300 300W, 12-15V, Single Circuit Transformer.
- T-LT600 600W, 12-15V, Dual Circuit Transformer.
- T-LT900 900W, 12-22V, Triple Circuit Transformer.
- T-FIDT Field Installed Plug-in Digital Timer.
- T-FIT Field Installed Plug-in Mechanical Timer.
- T-TR-FIP Field Installed Plug-in Photocell



T-LT75



T-LT150



T-LT300



T-FIDT



T-TR-FIP

Special Lenses & Honeycomb Louvers

- CX-238 MR-16 Snap-on holder, **Silver Plated**
- CX-239 MR-16 honeycomb louver, **Black**
- CX-240-AM MR-16 color lens, **Amber**
- CX-240-BL MR-16 color lens, **Blue**
- CX-240-GR MR-16 color lens, **Green**
- CX-240-RD MR-16 color lens, **Red**
- CX-240-YL MR-16 color lens, **Yellow**
- CX-241 MR-16 lens, **Linear Spread**
- CX-242 MR-16 lens, **Frosted**
- CX-243 MR-16 lens, **Prismatic**

• For MR-16 Lenses and Louvers, you will need the CX-238



Cable Connectors

- CX-LOC Quick-locking Cable Connectors, **Tan**
[\(Installation Instructions\)](#)

