

# SPECIFICATION SHEET

## PRODUCT # : CL-807-F-SI

•Flexible BBQ- Deck Light

•Aluminum & Steel

### Fixture Specifications:

**Head:** Diecast aluminum

**Arm:** Flexible steel s arms, available in 24" and 36" length.

**Finish:** Chrome plated fixture, in **SI- Silver Plated** finish. Also available in **BK- Black**.

**Lens:** Clear, tempered and heat resistant glass.

**Socket:** Top grade bi-pin socket



**Lamp:** 12V, MR-16 LED  
Available in 5W Bluetooth mesh RGB-WW; 3.5W, 5W, 6W LED or without lamp.  
See lamp guide, below for more information.

**Mounting:** Standard injection molded spike with 1/2" NPT threaded female hub

**Wiring:** Fixture is prewired with a 3ft direct burial cable. Wire connector sold separately. Quick-locking connectors (**CX-LOC**) are available from Corona Lighting, see page 2 for details.

**Electrical Notes:** A remote 12V transformer is required. Find options on page 2. Voltage range for BT/LED lamps are 9V-17V. Some assembly needed. Proper grease/lubricant is suggested on threaded parts during installation.

**Warranty:** One (1) year warranty on fixture against manufacturer's defects.

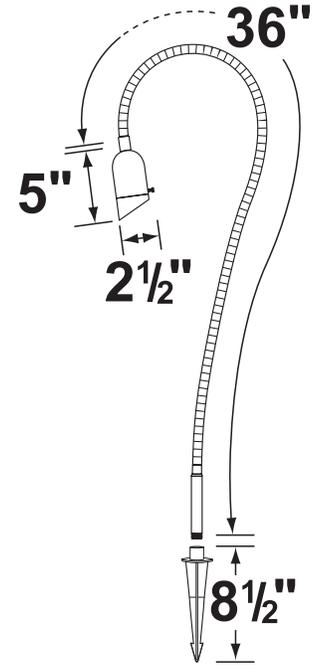

3.5W, 5W & 6W

### AVAILABLE LED LAMPS (Corona LED lamps have a five (5) year limited warranty against manufacturer's defects)

LAMP NUMBER	WATTS	BEAM		COLOR & TEMP.	RATED HOURS	HALOGEN EQUIVALENT
		SPREAD	LUMEN			
L-ED16-5W-BT	1-5	15° / 38° / 60°	25-530	2200K-5700K	50,000	---
L-ED16-3W / 5W-SP	3.5 / 5	15° Spot	270 / 350	2700K	50,000	25 / 40 Watt
L-ED16-3W / 5W-FL	3.5 / 5	45° Flood	270 / 350	2700K	50,000	25 / 40 Watt
L-ED16-3W / 5W-WF	3.5 / 5	60° Wide Flood	270 / 350	2700K	50,000	25 / 40 Watt
L-ED16-COB5W-SP / 3K	5	15° Spot	450 / 470	2700K / 3000K	50,000	50 Watt
L-ED16-COB5W-FL / 3K	5	38° Flood	450 / 470	2700K / 3000K	50,000	50 Watt
L-ED16-COB5W-WF / 3K	5	60° Wide Flood	450 / 470	2700K / 3000K	50,000	50 Watt
L-ED16-6W-SP / 3K	6	15° Spot	600	2700K / 3000K	50,000	75 Watt
L-ED16-6W-FL / 3K	6	38° Flood	600	2700K / 3000K	50,000	75 Watt
L-ED16-6W-WF / 3K	6	60° Wide Flood	600	2700K / 3000K	50,000	75 Watt

■5W Single color MR-16 LED available in AMBER, BLUE, GREEN, PURPLE, RED and VIOLET

• When ordering LED lamp with a fixture your part number should follow the format below:

• CL - **product #** - **Length** - **lamp** - **wattage** - **lamp angle**  
CL - 807-F-SI - 24 - L-ED16 - 5W - FL

Example: CL-807-F-SI-24-L-ED16-5W-FL

• Corona Lighting reserves the right to make any change and/or improvement to the design and construction of this fixture without further notification.

### JOB INFORMATION

TYPE: \_\_\_\_\_ DATE: \_\_\_\_\_

JOB NAME & ADDRESS: \_\_\_\_\_

PRODUCT #:

TOTAL QUANTITY:

LAMP TYPE & WATTAGE:

TRANSFORMER:

CONTRACTOR:


SPECIFIER:

# ACCESSORIES SHEET

## PRODUCT # : CL-807-F-SI

### Mounting Pedestals

CX-603-BK 3" PVC Mounting Pedestal, 1/2" NPT Female Brass Hub on top, **Black**

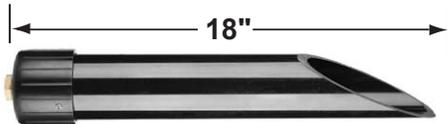


**CX-603-BK**

- CX-621-BK 1" PVC Cap, 1/2" NPT, **Black**
- CX-622-BK 2" PVC Cap, 1/2" NPT, **Black**
- CX-624-BK 3" PVC Cap, 1/2" NPT Female Brass Hub, **Black**

### Ground Spikes

- CX-640-BK 6" Aluminum Spike, 1/2" NPT Male Hub, **Black**
- CX-642 8 1/2" h x 1/2" w ABS Spike, 1/2" NPT, **Black, Bronze**
- CX-643-BZ 8 1/2" h x 3" w ABS Spike, 1/2" NPT, **Bronze**

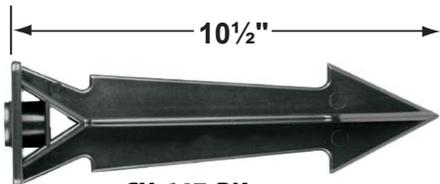

**CX-647-BK**

- CX-646-BK 8" ABS Spike, 1/2" NPT, **Black**
- CX-646-BR 8" h x 1/2" w Brass Spike, 1/2" NPT, **Natural Brass**
- CX-647-BK 10.5" Heavy Duty ABS Spike, 1/2" NPT, **Black**
- CX-650-BZ 8.5" Slotted ABS Spike with Brass Treads, **Bronze**

### Stainless Steel Pool and Spa Rated Transformers

- T-LTF60 60W, 12V, Compact Mini Transformer
- T-LT75 75W, 12 and 15V, Single Circuit Transformer w/ Integrated Mechanical Timer.
- T-LT150 150W, 12-15V, Single Circuit Transformer.
- T-LT300 300W, 12-15V, Single Circuit Transformer.
- T-LT600 600W, 12-15V, Dual Circuit Transformer.
- T-LT900 900W, 12-22V, Triple Circuit Transformer.
- T-FIDT Field Installed Plug-in Digital Timer.
- T-FIT Field Installed Plug-in Mechanical Timer.
- T-TR-FIP Field Installed Plug-in Photocell



**T-TR-FIP**

### •Flexible BBQ- Deck Light


### •Aluminum & Steel

### Cable Connectors

CX-LOC Quick-locking Cable Connectors, **Tan**  
[\(Installation Instructions\)](#)



**CX-LOC**



### Special Lenses & Honeycomb Louvers

- CX-238 MR-16 Snap-on holder, **Silver Plated**
- CX-239 MR-16 honeycomb louver, **Black**
- CX-240-AM MR-16 color lens, **Amber**
- CX-240-BL MR-16 color lens, **Blue**
- CX-240-GR MR-16 color lens, **Green**
- CX-240-RD MR-16 color lens, **Red**
- CX-240-YL MR-16 color lens, **Yellow**
- CX-241 MR-16 lens, **Linear Spread**
- CX-242 MR-16 lens, **Frosted**
- CX-243 MR-16 lens, **Prismatic**

•For MR-16 Lenses and Louvers, you will need the CX-238



**T-FIDT**



**T-LT75**