

SPECIFICATION SHEET

PRODUCT # : CL-807-F

•Flexible Garden Light

• Aluminum & Steel

Fixture Specifications:

Head: Diecast aluminum

Arm: Flexible steel black polyolefin shrink wrap arm available in 12", 24", and 36" lengths.

Finish: Polyester UV powder coated, with **BK- Black** finish
Also available in **SI- Silver Plated**

Lens: Clear, tempered and heat resistant glass.

Socket: Top grade, bi-pin socket


Lamp: 12V, MR-16 LED
Available in 5W Bluetooth mesh Smart RGB-WW;
3.5W, 5W, 6W LED or without lamp.
See lamp guide, below for more information.

Mounting: Standard injection molded spike with 1/2" NPT threaded female hub.


Wiring: Fixture is prewired with a 3ft direct burial cable. Wire connector sold separately.
Quick-locking connectors (**CX-LOC**) are available from Corona Lighting, see page 2.

Electrical Notes: A remote 12V transformer is required. Find options on page 2. Voltage range for BT/LED lamps are 9V-17V. Some assembly needed. Proper grease/lubricant is suggested on threaded parts during installation.

Warranty: One (1) year warranty on fixture against manufacturer's defects.



3.5W, 5W & 6W

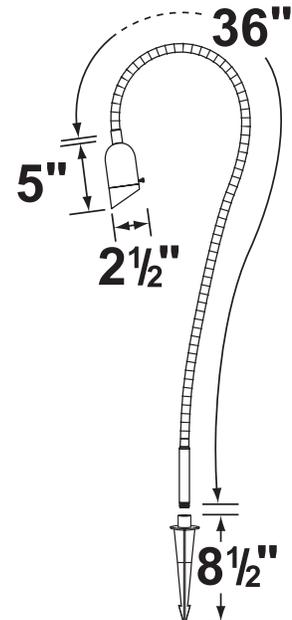

AVAILABLE LED LAMPS (Corona LED lamps have a five (5) year limited warranty against manufacturer's defects)

LAMP NUMBER	WATTS	BEAM		COLOR & TEMP.	RATED HOURS	HALOGEN EQUIVALENT
		SPREAD	LUMEN			
L-ED16-5W-BT	1-5	15° / 38° / 60°	25-530	2200K-5700K	50,000	---
L-ED16-3W / 5W-SP	3.5 / 5	15° Spot	270 / 350	2700K	50,000	25 / 40 Watt
L-ED16-3W / 5W-FL	3.5 / 5	45° Flood	270 / 350	2700K	50,000	25 / 40 Watt
L-ED16-3W / 5W-WF	3.5 / 5	60° Wide Flood	270 / 350	2700K	50,000	25 / 40 Watt
L-ED16-COB5W-SP / 3K	5	15° Spot	450 / 470	2700K / 3000K	50,000	50 Watt
L-ED16-COB5W-FL / 3K	5	38° Flood	450 / 470	2700K / 3000K	50,000	50 Watt
L-ED16-COB5W-WF / 3K	5	60° Wide Flood	450 / 470	2700K / 3000K	50,000	50 Watt
L-ED16-6W-SP / 3K	6	15° Spot	600	2700K / 3000K	50,000	75 Watt
L-ED16-6W-FL / 3K	6	38° Flood	600	2700K / 3000K	50,000	75 Watt
L-ED16-6W-WF / 3K	6	60° Wide Flood	600	2700K / 3000K	50,000	75 Watt

■ 5W Single color MR-16 LED available in AMBER, BLUE, GREEN, PURPLE, RED and VIOLET

JOB INFORMATION

TYPE: _____ DATE: _____

JOB NAME & ADDRESS: _____

PRODUCT #: _____

TOTAL QUANTITY: _____

LAMP TYPE & WATTAGE: _____

TRANSFORMER: _____

CONTRACTOR: _____

SPECIFIER: _____

• When ordering LED lamp with a fixture your part number should follow the format below:

• CL - product # - Length - lamp - wattage - lamp angle

CL - 807-F-BK - 24 - L-ED16 - 5W - FL


Example: CL-807-F-BK-24-L-ED16-5W-FL

• Corona Lighting reserves the right to make any change and/or improvement to the design and construction of this fixture without further notification.

PRODUCT # : CL-807-F

Mounting Pedestals

CX-603-BK 3" PVC Mounting Pedestal, 1/2" NPT Female Brass Hub on top, **Black**

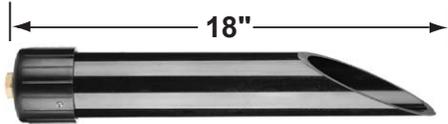

CX-603-BK

CX-621-BK 1" PVC Cap, 1/2" NPT, **Black**

CX-622-BK 2" PVC Cap, 1/2" NPT, **Black**


CX-624-BK 3" PVC Cap, 1/2" NPT Female Brass Hub, **Black**

Ground Spikes

CX-640-BK 6" Aluminum Spike, 1/2" NPT Male Hub, **Black**

CX-642 8 1/2" h x 1/2" w ABS Spike, 1/2" NPT, **Black, Bronze**

CX-643-BZ 8 1/2" h x 3" w ABS Spike, 1/2" NPT, **Bronze**

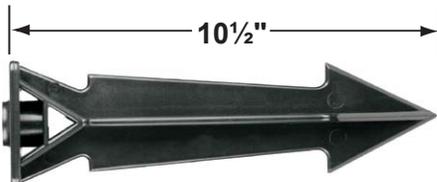

CX-647-BK

CX-646-BK 8" ABS Spike, 1/2" NPT, **Black**

CX-646-BR 8" h x 1/2" w Brass Spike, 1/2" NPT, **Natural Brass**

CX-647-BK 10.5" Heavy Duty ABS Spike, 1/2" NPT, **Black**

CX-650-BZ 8.5" Slotted ABS Spike with Brass Treads, **Bronze**

Stainless Steel Pool and Spa Rated Transformers

T-LTF60 60W, 12V, Compact Mini Transformer

T-LT75 75W, 12 and 15V, Single Circuit Transformer w/ Integrated Mechanical Timer.

T-LT150 150W, 12-15V, Single Circuit Transformer.

T-LT300 300W, 12-15V, Single Circuit Transformer.

T-LT600 600W, 12-15V, Dual Circuit Transformer.

T-LT900 900W, 12-22V, Triple Circuit Transformer.

T-FIDT Field Installed Plug-in Digital Timer.

T-FIT Field Installed Plug-in Mechanical Timer.

T-TR-FIP Field Installed Plug-in Photocell



T-TR-FIP



T-FIDT



•Flexible Garden Light

•Aluminum & Steel

Cable Connectors

CX-LOC Quick-locking Cable Connectors, **Tan**
([Installation Instructions](#))



CX-LOC

Special Lenses & Honeycomb Louvers

CX-238 MR-16 Snap-on holder, **Silver Plated**

CX-239 MR-16 honeycomb louver, **Black**

CX-240-AM MR-16 color lens, **Amber**

CX-240-BL MR-16 color lens, **Blue**

CX-240-GR MR-16 color lens, **Green**

CX-240-RD MR-16 color lens, **Red**

CX-240-YL MR-16 color lens, **Yellow**

CX-241 MR-16 lens, **Linear Spread**

CX-242 MR-16 lens, **Frosted**

CX-243 MR-16 lens, **Prismatic**

• For MR-16 Lenses and Louvers, you will need the CX-238

T-LT75

