

# SPECIFICATION SHEET

## PRODUCT # : CL-721-BZ

•Path Lights

•Machined Aluminum

### Fixture Specifications:

**Housing & Shroud:** Corrosion resistant machined aluminum.

**Stem:** 24" machined aluminum with 1/2 in NPT on bottom. 18" stem also available.

**Finish:** **BZ- Bronze.** Smooth surface (no texture) polyester UV powder coated. Also available in **BK- Black**

**Lens:** Clear and heat resistant tempered flat glass.

**Socket:** Top grade fixed ceramic bi-pin socket, with lamp retension clip to securely hold lamp in place.

**Lamp:** 12V, MR-16 LED  
Available in 3.5W, 5W, 6W or without lamp. See lamp guide, below for more information.

**Gasket:** Silicone double gasket for water tight sealing.


**Knuckle:** Adjustable machined aluminum knuckle with Stainless Steel Philips screw and 1/2" NPT threaded male hub

**Wiring:** Fixture is prewired with a 3ft 18-2 SPT1-W direct burial cord and underground connectors.


**Mounting Spike:** 8 1/2" slotted black ABS spike with 1/2" NPT threaded female hub.

**Electrical Notes:** A remote 12V transformer is required. Options are available from Corona Lighting. Voltage range for LED lamps are 9V-17V. Some assembly needed. Proper grease/lubricant is suggested on threaded parts during installation.

**Warranty:** Ten (10) year warranty on fixture housing against manufacturer's defects.

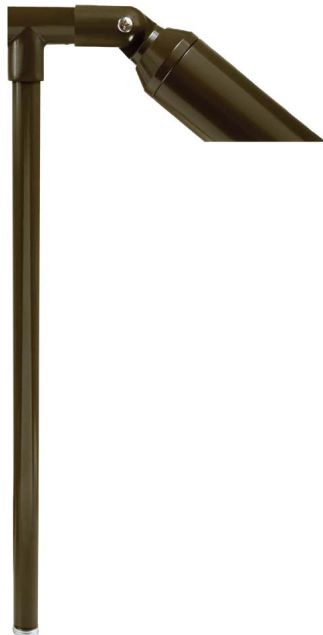

3.5W, 5W & 6W

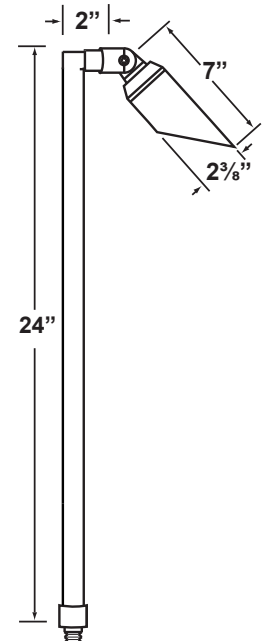

### AVAILABLE LED LAMPS (Corona LED lamps have a five (5) year limited warranty against manufacturer's defects)

| LAMP NUMBER     | WATTS | BEAM           |         | COLOR & TEMP. | RATED HOURS | HALOGEN EQUIVALENT |
|-----------------|-------|----------------|---------|---------------|-------------|--------------------|
|                 |       | SPREAD         | LUMEN   |               |             |                    |
| L-ED16-3W-SP    | 3.5   | 15° Spot       | 270     | 2700K         | 50,000      | 25 Watt            |
| L-ED16-3W-FL    | 3.5   | 45° Flood      | 270     | 2700K         | 50,000      | 25 Watt            |
| L-ED16-3W-WF    | 3.5   | 60° Wide Flood | 270     | 2700K         | 50,000      | 25 Watt            |
| L-ED16-5W-SP    | 5     | 15° Spot       | 350     | 2700K         | 50,000      | 40 Watt            |
| L-ED16-5W-FL    | 5     | 45° Flood      | 350     | 2700K         | 50,000      | 40 Watt            |
| L-ED16-5W-WF    | 5     | 60° Wide Flood | 350     | 2700K         | 50,000      | 40 Watt            |
| L-ED16-COB5W-SP | 5     | 15° Spot       | 450/470 | 2700K/3000K   | 50,000      | 50 Watt            |
| L-ED16-COB5W-FL | 5     | 38° Flood      | 450/470 | 2700K/3000K   | 50,000      | 50 Watt            |
| L-ED16-COB5W-WF | 5     | 60° Wide Flood | 450/470 | 2700K/3000K   | 50,000      | 50 Watt            |
| L-ED16-6W-SP    | 6     | 15° Spot       | 600     | 2700K/3000K   | 50,000      | 75 Watt            |
| L-ED16-6W-FL    | 6     | 38° Flood      | 600     | 2700K/3000K   | 50,000      | 75 Watt            |
| L-ED16-6W-WF    | 6     | 60° Wide Flood | 600     | 2700K/3000K   | 50,000      | 75 Watt            |

■ Single color MR-16 LED available in AMBER, BLUE, GREEN, PURPLE, RED and VIOLET

### JOB INFORMATION

TYPE: DATE:

JOB NAME & ADDRESS:

PRODUCT #:

TOTAL QUANTITY:

LAMP TYPE & WATTAGE:

TRANSFORMER:

CONTRACTOR:

SPECIFIER:

• When ordering LED lamp with a fixture your part number should follow the format below:

• **CL** - product # - **Length** - **lamp** - **wattage** - **lamp angle**  
CL - 721-BZ - 18 - L-ED16 - 5W - FL

Example: CL-721-BK-18-L-ED16-5W-FL

• Corona Lighting reserves the right to make any change and/or improvement to the design and construction of this fixture without further notification.

ARCHITECTURAL GRADE SERIES

# ACCESSORIES SHEET

## PRODUCT # : CL-721-BZ

• Directional Lights

• Machined Aluminum

### Mounting Risers

- CX-671 6" Aluminum Riser, ½ NPT Male/Female  
Finishes: **BK-** Black, **BZ-** Bronze
- CX-672 12" Aluminum Riser, ½ NPT Male/Female  
Finishes: **BK-** Black, **BZ-** Bronze
- CX-673 18" Aluminum Riser, ½ NPT Male/Female  
Finishes: **BK-** Black, **BZ-** Bronze



CX-671-BK 6"



CX-672-BK 12"



CX-673-BK 18"

### Mounting Posts For Sign Light & Path Light Applications

- CX-678 24" Aluminum Single Head Post, **BK-Black**, **BZ-Bronze**
- CX-679 24" Aluminum Double Head Post, **BK-Black**, **BZ-Bronze**
- CX-690 18" Aluminum Single Head Post, **BK-Black**, **BZ-Bronze**
- CX-693 18" Aluminum Double Head Post, **BK-Black**, **BZ-Bronze**



CX-678-BZ 24"



CX-679-BZ 24"



CX-690-BZ 18"



CX-693-BZ 18"

• CX-718 (Mounting Canopies pg 2) is required for sign light installation.

### Mounting Canopies

- CX-709 Aluminum Raised Canopy, ½" NPT.  
Finishes: **BK-** Black, **BZ-** Bronze
- CX-718 5" Aluminum Canopy, 3-Hole ½" NPT.  
Finishes: **BK-** Black, **BZ-** Bronze
- CX-721 Aluminum Tree mount Canopy with 15" Rubber Strap  
stretches to 22"  
Finishes: **BK-** Black, **BZ-** Bronze
- CX-722 Aluminum Tree mount Canopy with 22" Rubber Strap  
stretches to 33"  
Finishes: **BK-** Black, **BZ-** Bronze
- CX-723 Aluminum Tree mount Canopy with 31" Rubber Strap  
stretches to 45"  
Finishes: **BK-** Black, **BZ-** Bronze



CX-718-BZ

CX-722-BZ

CX-709-BZ


## PRODUCT # : CL-721-BZ

• Directional Lights

• Machined Aluminum

### Mounting Pedestals

CX-603-BK 3" PVC Mounting Pedestal, 1/2" NPT Female Brass Hub on top, **Black**

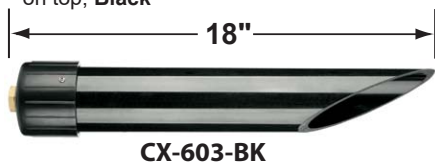

### Ground Spikes

CX-644-BK 8 1/2" x 1/2" Slotted Plastic Spike, **Black** (Included with fixture)



CX-646-BR 8" ABS Spike, 1/2" NPT, **Natural Brass**

CX-647-BK 10.5" Heavy Duty ABS Spike, 1/2" NPT, **Black**

### Special Lenses & Honeycomb Louvers

CX-238 MR-16 Snap-on holder, **Silver Plated**

CX-239 MR-16 honeycomb louver, **Black**

CX-240-AM MR-16 color lens, **Amber**

CX-240-BL MR-16 color lens, **Blue**

CX-240-GR MR-16 color lens, **Green**

CX-240-RD MR-16 color lens, **Red**

CX-240-YL MR-16 color lens, **Yellow**

CX-241 MR-16 lens, **Linear Spread**

CX-242 MR-16 lens, **Frosted**

CX-243 MR-16 lens, **Prismatic**

*For MR-16 Lenses and Louvers, you will need the CX-238*



### Transformers

|          |                                                                             |
|----------|-----------------------------------------------------------------------------|
| T-LTF60  | 60W, 12V, Compact Mini Transformer                                          |
| T-LT75   | 75W, 12 and 15V, Single Circuit Transformer w/ Integrated Mechanical Timer. |
| T-LT150  | 150W, 12-15V, Single Circuit Transformer.                                   |
| T-LT300  | 300W, 12-15V, Single Circuit Transformer.                                   |
| T-LT600  | 600W, 12-15V, Dual Circuit Transformer.                                     |
| T-LT900  | 900W, 12-22V, Triple Circuit Transformer.                                   |
| T-FIDT   | Field Installed Plug-in Digital Timer.                                      |
| T-FIT    | Field Installed Plug-in Mechanical Timer.                                   |
| T-TR-FIP | Field Installed Plug-in Photocell                                           |



**T-LT75**



**T-LT150**

### Dimmers

CX-DIM-100 100W, Low Voltage Dimmer Switch.  
Use with T-LT Series Transformers, **Black**



**CX-DIM-100**