

PRODUCT # : CL-721-T-BK

•Path Lights

•Machined Aluminum

Fixture Specifications:

Housing & Shroud: Corrosion resistant machined aluminum.

Stem: 24" machined aluminum with 1/2 in NPT on bottom. 18" stem also available.

Finish: **BK- Black.** Smooth surface (no texture) polyester UV powder coated.
Also available in **BZ- Bronze**

Lenses: Clear and heat resistant tempered flat glass.

Sockets: Top grade fixed ceramic bi-pin socket, with lamp retention clip to securely hold lamp in place.

Lamps: Two 12V, MR-16 LED
Available in 3.5W, 5W, 6W or without lamp.
See lamp guide, below for more information.

Gaskets: Silicone double gasket for water tight sealing.

Knuckles:

Adjustable machined aluminum knuckle with Stainless Steel Philips screw and 1/2" NPT threaded male hub

Wiring:

Fixture is prewired with a 3ft 18-2 SPT1-W direct burial cord and underground connectors.

Mounting Spike:

8 1/2" slotted black ABS spike with 1/2" NPT threaded male hub.

Electrical Notes:

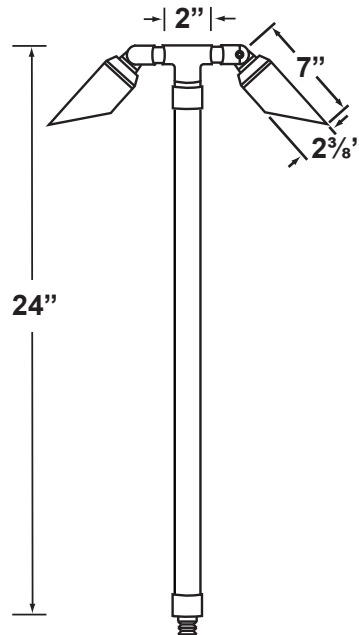
A remote 12V transformer is required. Options are available from Corona Lighting.
Voltage range for LED lamps are 9V-17V.
Some assembly needed. Proper grease/lubricant is suggested on threaded parts during installation.

Warranty:

Ten (10) year warranty on fixture housing against manufacturer's defects.



2x 3.5W, 5W & 6W



AVAILABLE LED LAMPS (Corona LED lamps have a five (5) year limited warranty against manufacturer's defects)

| LAMP NUMBER | WATTS | BEAM | | COLOR & TEMP. | RATED HOURS | HALOGEN EQUIVALENT |
|-----------------|-------|----------------|---------|---------------|-------------|--------------------|
| | | SPREAD | LUMEN | | | |
| L-ED16-3W-SP | 3.5 | 15° Spot | 270 | 2700K | 50,000 | 25 Watt |
| L-ED16-3W-FL | 3.5 | 45° Flood | 270 | 2700K | 50,000 | 25 Watt |
| L-ED16-3W-WF | 3.5 | 60° Wide Flood | 270 | 2700K | 50,000 | 25 Watt |
| L-ED16-5W-SP | 5 | 15° Spot | 350 | 2700K | 50,000 | 40 Watt |
| L-ED16-5W-FL | 5 | 45° Flood | 350 | 2700K | 50,000 | 40 Watt |
| L-ED16-5W-WF | 5 | 60° Wide Flood | 350 | 2700K | 50,000 | 40 Watt |
| L-ED16-COB5W-SP | 5 | 15° Spot | 450/470 | 2700K/3000K | 50,000 | 50 Watt |
| L-ED16-COB5W-FL | 5 | 38° Flood | 450/470 | 2700K/3000K | 50,000 | 50 Watt |
| L-ED16-COB5W-WF | 5 | 60° Wide Flood | 450/470 | 2700K/3000K | 50,000 | 50 Watt |
| L-ED16-6W-SP | 6 | 15° Spot | 600 | 2700K/3000K | 50,000 | 75 Watt |
| L-ED16-6W-FL | 6 | 38° Flood | 600 | 2700K/3000K | 50,000 | 75 Watt |
| L-ED16-6W-WF | 6 | 60° Wide Flood | 600 | 2700K/3000K | 50,000 | 75 Watt |

■ Single color MR-16 LED available in AMBER, BLUE, GREEN, PURPLE, RED and VIOLET

JOB INFORMATION

TYPE: _____ DATE: _____

JOB NAME & ADDRESS: _____

PRODUCT #: _____

TOTAL QUANTITY: _____

LAMP TYPE & WATTAGE: _____

TRANSFORMER: _____

CONTRACTOR: _____

SPECIFIER: _____

• When ordering LED lamp with a fixture your part number should follow the format below:

• CL - product # - Length - lamp - wattage - lamp angle

CL - 721-T-BK - 18 - L-ED16 - 5W - FL

Example: CL-721-T-BK-18-L-ED16-5W-FL

• Corona Lighting reserves the right to make any change and/or improvement to the design and construction of this fixture without further notification.

ACCESSORIES SHEET

PRODUCT # : CL-721-T-BK

•Path Lights

•Machined Aluminum

Mounting Risers

- CX-671 6" Aluminum Riser, ½ NPT Male/Female
Finishes: **BK**- Black, **BZ**- Bronze
- CX-672 12" Aluminum Riser, ½ NPT Male/Female
Finishes: **BK**- Black, **BZ**- Bronze
- CX-673 18" Aluminum Riser, ½ NPT Male/Female
Finishes: **BK**- Black, **BZ**- Bronze



CX-671-BK 6"



CX-672-BK 12"



CX-673-BK 18"

Mounting Posts For Sign Light & Path Light Applications

- CX-678 24" Aluminum Single Head Post, **BK**-Black, **BZ**-Bronze
- CX-679 24" Aluminum Double Head Post, **BK**-Black, **BZ**-Bronze
- CX-690 18" Aluminum Single Head Post, **BK**-Black, **BZ**-Bronze
- CX-693 18" Aluminum Double Head Post, **BK**-Black, **BZ**-Bronze



CX-678-BK 24"



CX-679-BK 24"



CX-690-BK 18"



CX-693-BK 18"

• CX-718 (Mounting Canopies pg 2) is required for sign light installation.

Mounting Canopies

- CX-701-BK Aluminum Mini 3 Hole Round Canopy, ½ NPT, **Black**
- CX-702-BK Aluminum Rectangular Canopy, ½ NPT, **Black**
- CX-709 Aluminum Raised Canopy, ½" NPT.
Finishes: **BK**- Black, **BZ**- Bronze
- CX-718 5" Aluminum Canopy, 3-Hole ½" NPT.
Finishes: **BK**- Black, **BZ**- Bronze
- CX-721 Aluminum Tree mount Canopy with 15" Rubber Strap
stretches to 22"
Finishes: **BK**- Black, **BZ**- Bronze
- CX-722 Aluminum Tree mount Canopy with 22" Rubber Strap
stretches to 33"
Finishes: **BK**- Black, **BZ**- Bronze
- CX-723 Aluminum Tree mount Canopy with 31" Rubber Strap
stretches to 45"
Finishes: **BK**- Black, **BZ**- Bronze



CX-718-BK

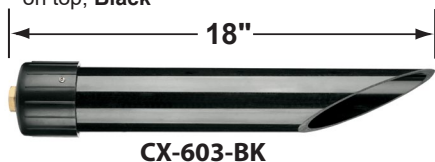
CX-709-BK

PRODUCT # : CL-721-T-BK

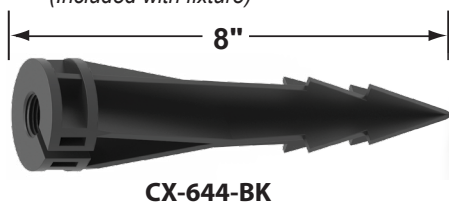
•Path Lights

•Machined Aluminum

Mounting Pedestals

CX-603-BK 3" PVC Mounting Pedestal, ½" NPT Female Brass Hub on top, **Black**


Ground Spikes

CX-644-BK 8½" x ½" Slotted Plastic Spike, **Black** (Included with fixture)

CX-646-BR 8" ABS Spike, ½" NPT, **Natural Brass**

CX-647-BK 10.5" Heavy Duty ABS Spike, ½" NPT, **Black**

Special Lenses & Honeycomb Louvers

CX-238 MR-16 Snap-on holder, **Silver Plated**

CX-239 MR-16 honeycomb louver, **Black**

CX-240-AM MR-16 color lens, **Amber**

CX-240-BL MR-16 color lens, **Blue**

CX-240-GR MR-16 color lens, **Green**

CX-240-RD MR-16 color lens, **Red**

CX-240-YL MR-16 color lens, **Yellow**

CX-241 MR-16 lens, **Linear Spread**

CX-242 MR-16 lens, **Frosted**

CX-243 MR-16 lens, **Prismatic**

For MR-16 Lenses and Louvers, you will need the CX-238



Transformers

T-LTF60 60W, 12V, Compact Mini Transformer
T-LT75 75W, 12 and 15V, Single Circuit Transformer w/ Integrated Mechanical Timer.
T-LT150 150W, 12-15V, Single Circuit Transformer.
T-LT300 300W, 12-15V, Single Circuit Transformer.
T-LT600 600W, 12-15V, Dual Circuit Transformer.
T-LT900 900W, 12-22V, Triple Circuit Transformer.
T-FIDT Field Installed Plug-in Digital Timer.
T-FIT Field Installed Plug-in Mechanical Timer.
T-TR-FIP Field Installed Plug-in Photocell


T-LT75



T-LT150

Dimmers

CX-DIM-100 100W, Low Voltage Dimmer Switch. Use with T-LT Series Transformers, **Black**


CX-DIM-100