

SPECIFICATION SHEET

PRODUCT # : CL-110B-WH

• Down Lights

• Cast Brass

Fixture Specifications:

Housing: Corrosion resistant cast brass.

Finish: **WH- White Brass**
Also available in **AB** and **GM** finishes.

Lens: Clear and heat resistant tempered flat glass

Socket: Top grade fixed ceramic bi-pin socket, with lamp retention clip to securely hold lamp in place.

Lamp: Two 12V, MR-16 LED
Available in 5W Bluetooth mesh smart RGB-WW or 6W CCT; 2 / 3 / 5W (adjustable), 5W, 6W LED or without lamp. See lamp chart on pg 2 for details

Wiring: Fixture is prewired with a 25-ft 18-2 SPT2-W direct burial cord. Wire connector sold separately.
Quick-locking connectors (**CX-LOC**) are available from Corona Lighting, see below for information.



Gasket: Silicone gaskets for water-tight sealing

Mounting: Stainless Steel mounting screws with anchor bolts

Applications: Outdoor Living Spaces, Porches, Garages, Pool Cages and Pergolas


Electrical Notes: A remote 12V transformer is required. Options are available from Corona Lighting.
Voltage range for BT/LED lamps are 9V-17V.
Proper grease/lubricant is suggested on threaded parts during installation process.
Find our range of options on page 3

Warranty: Limited lifetime warranty on fixture housing against manufacturer's defects.

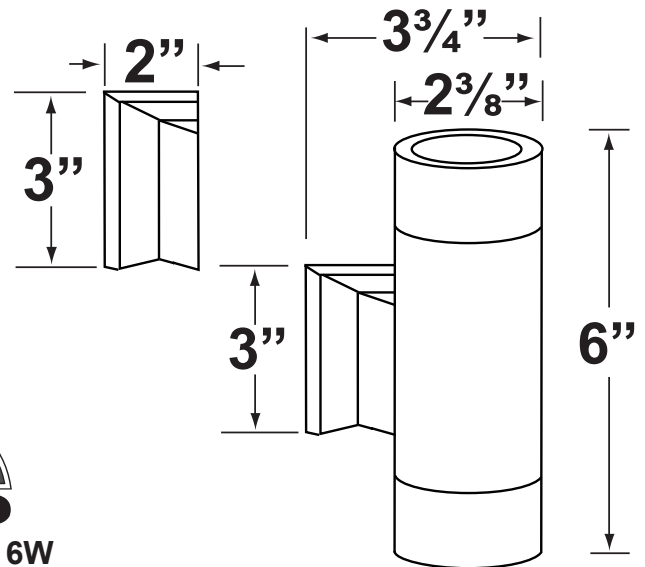

Cable Connectors

CX-LOC Quick-locking Cable Connectors, Tan
([Installation Instructions](#))

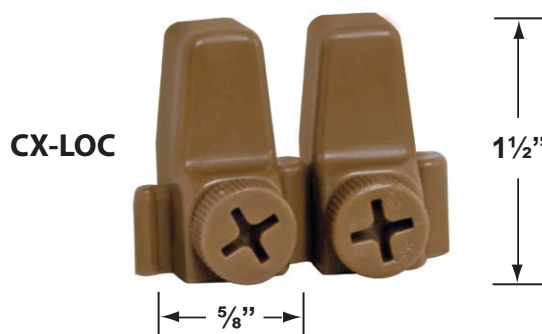

JOB INFORMATION

TYPE: **DATE:**

JOB NAME & ADDRESS:

PRODUCT #:

TOTAL QUANTITY:

LAMP TYPE & WATTAGE:

TRANSFORMER:

CONTRACTOR:

SPECIFIER:

• When ordering LED lamp with a fixture your part number should follow the format below:

• **CL** - **product #** - **lamp** - **wattage** - **lamp angle**
CL - 110B-WH - L-ED16 - 3W - SP

Example: CL-110B-WH-L-ED16-3W-SP

• Corona Lighting reserves the right to make any change and/or improvement to the design and construction of this fixture without further notification.

ACCESSORIES SHEET

PRODUCT # : CL-110B-WH

• Down Lights

• Cast Brass

AVAILABLE LED LAMPS (Corona LED lamps have a five (5) year limited warranty against manufacturer's defects)


L-ED16-5W-BT

L-ED16-6W-FL

L-ED16-6W-CCT

LAMP NUMBER	WATTS	BASE	BEAM SPREAD	BEAM LUMEN	COLOR TEMP.	RATED LIFE (HOURS)	Halogen Equivalent
L-ED16-5W-BT 	1 - 5	Bi-Pin	15° / 38° / 60° / 100°	25 - 530	2200K - 5700K	50,000	35W
<i>(Color-Changing, Color Temperature Changing, Zoning, & Dimming)</i>							
L-ED16-6W-CCT 	0.2 - 6	Bi-Pin	24° / 36° / 60° / 100°	25 - 550	2200K - 5700K	50,000	50W
<i>(Color Temperature Changing, Zoning, & Dimming)</i>							
L-ED16-5W-ADJ	Push Button Adjustable Modes Below				(with 2nd push button)		
2W- Mode	2	Bi-Pin	15° / 38° / 60° / 100°	180	2700K / 3000K	50,000	35W
3W- Mode	3	Bi-Pin	15° / 38° / 60° / 100°	270	2700K / 3000K	50,000	35W
5W- Mode	5	Bi-Pin	15° / 38° / 60° / 100°	450	2700K / 3000K	50,000	35W
L-ED16-6W-SP/3K	6	Bi-Pin	15° SP	600	2700K / 3000K	50,000	75W
L-ED16-6W-FL/3K	6	Bi-Pin	38° FL	600	2700K / 3000K	50,000	75W
L-ED16-6W-WF/3K	6	Bi-Pin	60° WF	600	2700K / 3000K	50,000	75W
L-ED16-COB5W-SP/3K	5	Bi-Pin	15° SP	450 / 470	2700K / 3000K	50,000	50W
L-ED16-COB5W-FL/3K	5	Bi-Pin	38° FL	450 / 470	2700K / 3000K	50,000	50W
L-ED16-COB5W-WF/3K	5	Bi-Pin	60° WF	450 / 470	2700K / 3000K	50,000	50W
L-ED16-5W-SP	5	Bi-Pin	15° SP	350	2700K	50,000	40W
L-ED16-5W-FL	5	Bi-Pin	45° FL	350	2700K	50,000	40W
L-ED16-5W-WF	5	Bi-Pin	60° WF	350	2700K	50,000	40W
L-ED16-3W-SP	3.5	Bi-Pin	15° SP	270	2700K	50,000	25W
L-ED16-3W-FL	3.5	Bi-Pin	45° FL	270	2700K	50,000	25W
L-ED16-3W-WF	3.5	Bi-Pin	60° WF	270	2700K	50,000	25W
L-ED16-5W-COLOR *	5	Bi-Pin	45°	---	---	35,000	25-30W

 - Bluetooth Connection (CX-BTE Range Extender, highly recommended)

 - Color Changing

 - Amber (AM), Blue (BL), Green (GR), Purple (PL), Red (RD), & Violet (VT) single colors available

For more additional Lamps, and accessories visit Coronalighting.com

Special Lenses & Honeycomb Louvers

CX-238	MR-16 Snap-on holder, Silver Plated
CX-239	MR-16 honeycomb louver, Black
CX-240-AM	MR-16 color lens, Amber
CX-240-BL	MR-16 color lens, Blue
CX-240-GR	MR-16 color lens, Green
CX-240-RD	MR-16 color lens, Red
CX-240-YL	MR-16 color lens, Yellow
CX-241	MR-16 lens, Linear Spread
CX-242	MR-16 lens, Frosted
CX-243	MR-16 lens, Prismatic

• For MR-16 Lenses and Louvers, you will need the CX-238



PRODUCT # : CL-110B-WH

Down Lights

• Cast Brass

Stainless Steel Pool and Spa Rated Transformers

- T-LT150-Z 150W, 12-15V Smart Zoning Single Circuit
([Spec Sheet](#)) | ([Installation Instructions](#))
- T-LT300-Z 300W, 12-15V Smart Zoning Single Circuit
([Spec Sheet](#)) | ([Installation Instructions](#))
- T-LTF60 60W, 12V, Compact Mini Transformer
- T-LT75 75W, 12 and 15V, Single Circuit Transformer
w/ Integrated Mechanical Timer.
- T-LT150 150W, 12-15V, Single Circuit Transformer.
- T-LT300 300W, 12-15V, Single Circuit Transformer.
- T-LT600 600W, 12-15V, Dual Circuit Transformer.
- T-LT900 900W, 12-22V, Triple Circuit Transformer.
- T-FIDT Field Installed Plug-in Digital Timer.
- T-FIT Field Installed Plug-in Mechanical Timer.
- T-TR-FIP Field Installed Plug-in Photocell



T-LT150-Z



T-LT300



T-FIDT



T-LT300-Z

Dimmers

- CX-DIM-100 100W, Low Voltage Dimmer Switch.
Use with T-LT Series Transformers, **Black**



CX-DIM-100



T-LT150



T-TR-FIP