

SPECIFICATION SHEET

PRODUCT # : CL-755-BT-T-AB

•Path Lights

•Cast Brass

Fixture Specifications:

Housing: Corrosion Resistant Cast Brass

Stem: 24" solid brass pipe with 1/2" NPT on bottom.
Stem is also available in 18".

Finish: **AB-** Antique Bronze
Natural Toning process, color may vary.
Also available in **GM-** Gun Metal

Lens: Clear, Convex Glass Lens.
15° & 60° reflectors included (see page 2)

Light Source: Two Replacable 1-6W RGB LED modules. Lumen output is between 15LM - 450LM. Standard 38° beam spread, with 15° & 60° options also included.

LED Features: CCT Options: Presets: 2200K, 2700K, 3000K, 4000K, 5000K, 5700K
Dimming: With every color temperature
Scenes: Customizable scenes with up to 8 color temperatures.
Compatibility: Amazon's Alexa* and Google Home*
*(*CX-BTG-2 gateway required, see below)*
Music: The lights will follow music collected by a device's microphone.

Connection: Bluetooth Mesh, *Range Extender (CX-BTE) is highly recommended, see below for details.*

Knuckle: Swivel cast brass knuckle with thumb screw and 1/2" NPT threaded male hub on bottom.



Gasket: Silicone double gasketed for water-tight sealing

Wiring: Fixture is prewired with a 10ft 18-2 SPT-2W direct burial cord. Wire connector sold separately. Quick-locking connectors (**CX-LOC**) are available from Corona Lighting, find on page 2.

Mounting Spike: Standard injection molded 8 1/2" large spike with 1/2" NPT threaded female hub on bottom.

Electrical Notes: A remote 12V transformer is required. Options are available from Corona Lighting for details see page 3. Voltage range for LED module is 2x10V-15V (2x10VA). Proper grease/lubricant is suggested on threaded parts during installation process.

Warranty: Lifetime limited warranty on fixture housing. Ten (10) years warranty on LED module.

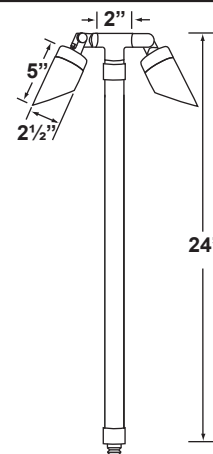

SMART ACCESSORIES

CX-BTE Bluetooth Range Extender
CX-BTG-2 Wireless Bluetooth Mesh Gateway



JOB INFORMATION

TYPE: _____ DATE: _____

JOB NAME & ADDRESS: _____

PRODUCT #: _____

TOTAL QUANTITY: _____

LAMP TYPE & WATTAGE: _____

TRANSFORMER: _____

CONTRACTOR: _____

SPECIFIER: _____

PRODUCT # : CL-755-BT-T-AB

•Path Lights


•Cast Brass

Ground Spikes

CX-640-BK 6" Aluminum Spike, 1/2" NPT Male Hub, **Black**

CX-642 8 1/2" h x 1/2" w ABS Spike, 1/2" NPT, **Black, Bronze**

CX-643-BZ 8 1/2" h x 3" w ABS Spike, 1/2" NPT, **Bronze**

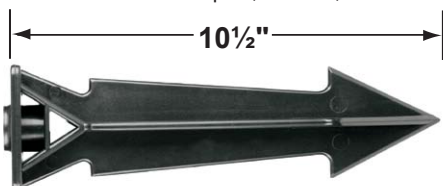

CX-647-BK

CX-646-BK 8" ABS Spike, 1/2" NPT, **Black**


CX-646-BR 8" h x 1/2" w Brass Spike, 1/2" NPT, **Natural Brass**

CX-647-BK 10.5" Heavy Duty ABS Spike, 1/2" NPT, **Black**

CX-650-BZ 8.5" Slotted ABS Spike with Brass Treads, **Bronze**

Mounting Pedestals

CX-603-BK 3" PVC Mounting Pedestal, 1/2" NPT Female Brass Hub on top, **Black**

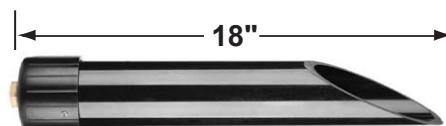

CX-603-BK

CX-621-BK 1" PVC Cap, 1/2" NPT, **Black**

CX-622-BK 2" PVC Cap, 1/2" NPT, **Black**

CX-624-BK 3" PVC Cap, 1/2" NPT Female Brass Hub, **Black**

Reflectors (Free Pack-in)

15D 15° Reflector

60D 60° Reflector



15D



60D

Mounting Canopies


CX-705B-AB Brass Flat Canopy, 1/2" NPT, **Antique Bronze**

CX-709B-AB Brass Raised Canopy, 1/2" NPT, **Antique Bronze**

CX-718B-AB 5" Brass Canopy, 3-Hole 1/2" NPT, **Antique Bronze**



CX-709B-AB




CX-718B-AB


Cable Connector

CX-LOC Quick-locking Cable Connectors, **Tan**

[\(Installation Instructions\)](#)

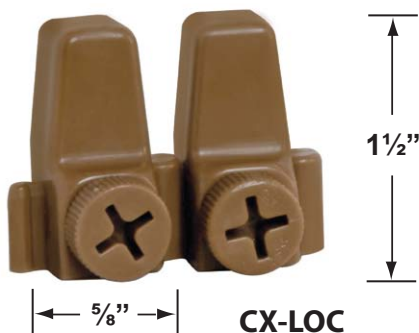

CX-LOC

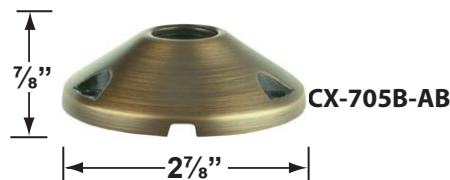

CX-705B-AB

ACCESSORIES SHEET

PRODUCT # : CL-755-BT-T-AB

•Path Lights

•Cast Brass

Mounting Risers

- CX-682B-AB 6" Brass Riser, ½ NPT Male/Female, **Antique Bronze**
- CX-683B-AB 12" Brass Riser, ½ NPT Male/Female, **Antique Bronze**
- CX-684B-AB 18" Brass Riser, ½ NPT Male/Female, **Antique Bronze**
- CX-685B-AB 24" Brass Riser, ½ NPT Male/Female, **Antique Bronze**



CX-682B-AB 6"



CX-683B-AB 12"



CX-684B-AB 18"



CX-685B-AB 24"



T-LT150-Z



T-LT300-Z

Stainless Steel Smart WiFi Zoning (3 Zone) Transformers

- T-LT150-Z 150W, 12-15V Smart Zoning Single Circuit Transformer
([Spec Sheet](#)) | ([Installation Instructions](#))
- T-LT300-Z 300W, 12-15V Smart Zoning Single Circuit Transformer
([Spec Sheet](#)) | ([Installation Instructions](#))

Stainless Steel Pool and Spa Rated Transformers

- T-LTF60 60W, 12V, Compact Mini Transformer
- T-LT75 75W, 12 and 15V, Single Circuit Transformer
w/ Integrated Mechanical Timer.
- T-LT150 150W, 12-15V, Single Circuit Transformer.
- T-LT300 300W, 12-15V, Single Circuit Transformer.
- T-LT600 600W, 12-15V, Dual Circuit Transformer.
- T-LT900 900W, 12-22V, Triple Circuit Transformer.
- T-FIDT Field Installed Plug-in Digital Timer.
- T-FIT Field Installed Plug-in Mechanical Timer.
- T-TR-FIP Field Installed Plug-in Photocell



T-FIDT



T-LT150



T-TR-FIP