

SPECIFICATION SHEET

PRODUCT # : CL-410-BT-AB

• Directional Lights

• Cast Brass

Fixture Specifications:

Housing: Die-cast Brass

Finish: **AB-Antique Bronze.** Natural toning process.
AB finish will vary due to artistic process.
GM-Gun Metal also available

Lens: Clear, Heat resistant flat glass lens

Light Source: RGB-WW LED Module, Wattage: 5W-15W
Beam spread: 60° (38° & 15° options included) ,
Light output: 75LM-1350LM

LED Features: CCT Options: Presets: 2200K, 2700K, 3000K,
4000K, 5000K, 5700K
Dimming: With every color temperature
Scenes: Customizable scenes with up to 8 color
temperatures.
Compatibility: Amazon's Alexa* and Google Home*
(***CX-BTG-2** gateway required, see below)
Music: The lights will follow music collected by a
device's microphone.

Gasket: Silicone double gasketed for water tight sealing

Connection: Bluetooth Mesh, *Range Extender (CX-BTE) is highly recommended, see below for details.*



Knuckle: Adjustable cast brass knuckle with thumb screw and 1/2" NPT threaded male hub on bottom.

Wiring: 10 Foot SPT-2W, UL Listed Wire connector sold separately. Quick-locking connectors (**CX-LOC**) are available from Corona Lighting.

Mounting Spike: 8.5" Large Slotted Spike with Brass Threads

Electrical Notes: A remote 12V transformer is required. Options are available from Corona Lighting. Voltage range for LED module is 9V-17V (12.5VA). Proper grease/lubricant is suggested on threaded parts during installation process.


Warranty: Lifetime Warranty on Fixture Housing. Ten Year Warranty on Replaceable LED Module.

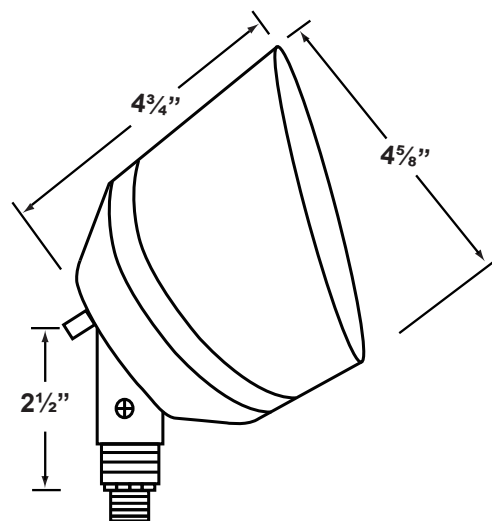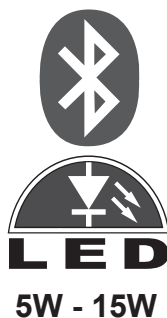

SMART ACCESSORIES

CX-BTE Bluetooth Range Extender

CX-BTG-2 Wireless Bluetooth Mesh Gateway

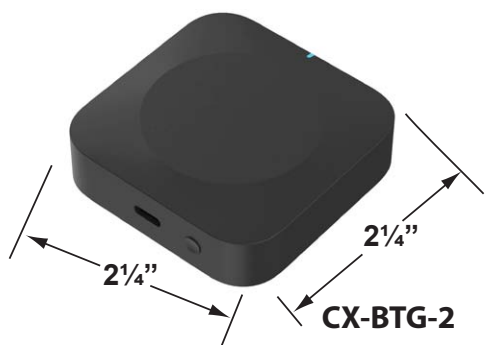

JOB INFORMATION

TYPE: DATE:

JOB NAME & ADDRESS:

PRODUCT #:

TOTAL QUANTITY:

LAMP TYPE & WATTAGE:

TRANSFORMER:

CONTRACTOR:

SPECIFIER:

ACCESSORIES SHEET

PRODUCT # : CL-410-BT-AB

• Directional Lights

• Cast Brass

Mounting Pedestals

CX-603-BK 3" PVC Mounting Pedestal, 1/2" NPT Female Brass Hub on top, **Black**



CX-621-BK 1" PVC Cap, 1/2" NPT, **Black**

CX-621-VG 1" PVC Cap, 1/2" NPT, **Verde Green**

CX-622-BK 2" PVC Cap, 1/2" NPT, **Black**

CX-622-VG 2" PVC Cap, 1/2" NPT, **Verde Green**

CX-624-BK 3" PVC Cap, 1/2" NPT Female Brass Hub, **Black**

Mounting Canopies

CX-705B-AB Brass Flat Canopy, 1/2" NPT, **Antique Bronze**

CX-709B-AB Brass Raised Canopy, 1/2" NPT, **Antique Bronze**





CX-718B-AB 5" Brass Canopy, 3-Hole 1/2" NPT, **Antique Bronze**

CX-719B-AB Brass Tree Mounting Bracket, 1/2" NPT, **Antique Bronze**

CX-721B-AB Brass Tree mount Canopy with 15" Rubber Strap stretches to 22", **Antique Bronze**


CX-722B-AB Brass Tree mount Canopy with 22" Rubber Strap stretches to 33", **Antique Bronze**

CX-723B-AB Brass Tree mount Canopy with 31" Rubber Strap stretches to 45", **Antique Bronze**

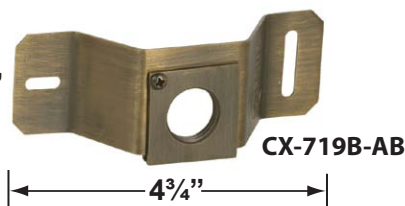

Ground Spikes

CX-650-BZ 8.5" Slotted ABS Spike, with brass threads 1/2" NPT, **Bronze**

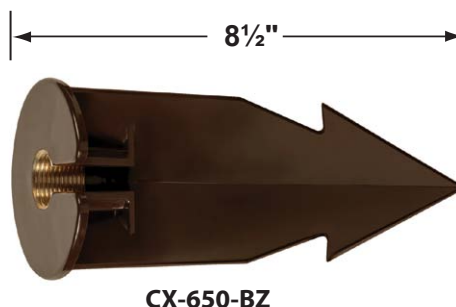

Mounting Risers

CX-682B-AB 6" Brass Riser, 1/2" NPT Male/Female, **Antique Bronze**

CX-683B-AB 12" Brass Riser, 1/2" NPT Male/Female, **Antique Bronze**

CX-684B-AB 18" Brass Riser, 1/2" NPT Male/Female, **Antique Bronze**

CX-685B-AB 24" Brass Riser, 1/2" NPT Male/Female, **Antique Bronze**



ACCESSORIES SHEET

PRODUCT # : CL-400-BT-AB


• Directional Lights

• Cast Brass

Mounting Posts For Sign Light & Path Light Applications


CX-678B-AB	24" Brass Single Head Post, Antique Bronze
CX-679B-AB	24" Brass Double Head Post, Antique Bronze
CX-690B-AB	18" Brass Single Head Post, Antique Bronze
CX-693B-AB	18" Brass Double Head Post, Antique Bronze

•CX-718B-AB (Mounting Canopies pg 2) is required for sign light installation.

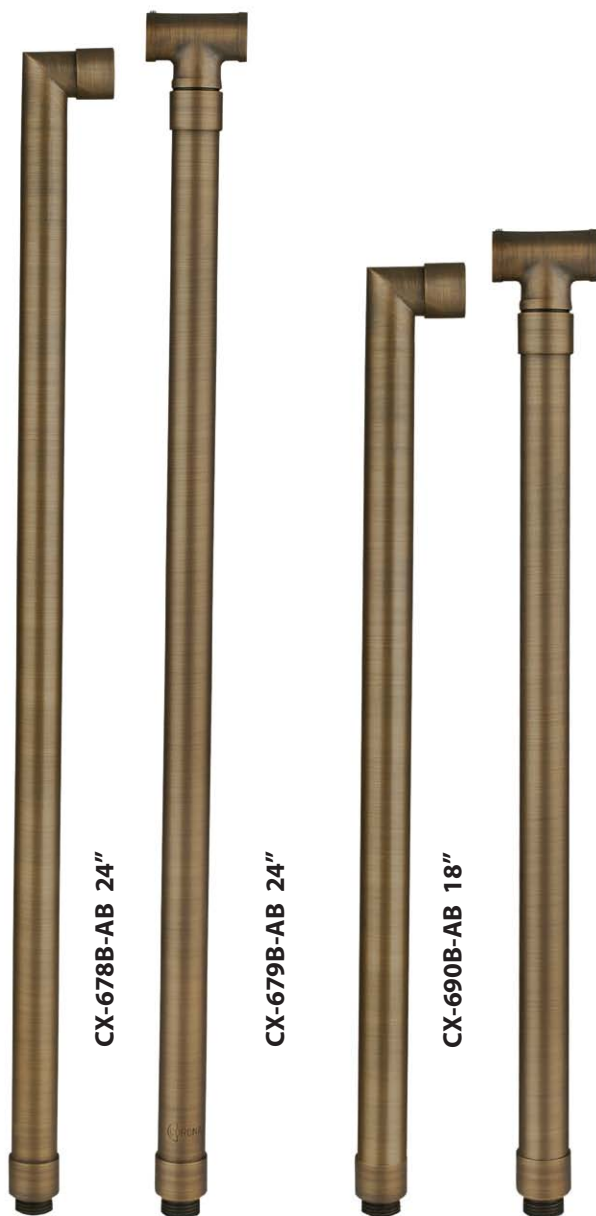

Cable Connector

CX-LOC Quick-locking Cable Connectors, Tan
([Installation Instructions](#))

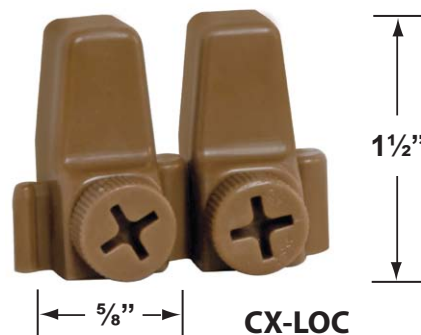

Stainless Steel Pool and Spa Rated Transformers

T-LT150-Z	150W, 12-15V Smart Zoning Single Circuit (Spec Sheet) (Installation Instructions)
T-LT300-Z	300W, 12-15V Smart Zoning Single Circuit (Spec Sheet) (Installation Instructions)
T-LTF60	60W, 12V, Compact Mini Transformer
T-LT75	75W, 12 and 15V, Single Circuit Transformer w/ Integrated Mechanical Timer.
T-LT150	150W, 12-15V, Single Circuit Transformer.
T-LT300	300W, 12-15V, Single Circuit Transformer.
T-LT600	600W, 12-15V, Dual Circuit Transformer.
T-LT900	900W, 12-22V, Triple Circuit Transformer.
T-FIDT	Field Installed Plug-in Digital Timer.
T-FIT	Field Installed Plug-in Mechanical Timer.
T-TR-FIP	Field Installed Plug-in Photocell



T-FIDT

T-LT150-Z