

SPECIFICATION SHEET

E-Mail: sales@coronalighting.com

PRODUCT # : CL-410-BT-GM

• Directional Lights

• Cast Brass

Fixture Specifications:

Housing: Die-cast Brass

Finish: **GM- Gun Metal.** Natural toning process.
AB-Antique Bronze also available

Lens: Clear, Heat resistant flat glass lens

Light Source: RGB-WW LED Module, Wattage: 5W-15W
Beam spread: 60° (38° & 15° options included) ,
Light output: 75LM-1350LM

LED Features: CCT Options: Presets: 2200K, 2700K, 3000K, 4000K, 5000K, 5700K
Dimming: With every color temperature
Scenes: Customizable scenes with up to 8 color temperatures.
Compatibility: Amazon's Alexa* and Google Home*
(***CX-BTG-2** gateway required, see below)
Music: The lights will follow music collected by a device's microphone.

Gasket: Silicone double gasketed for water tight sealing

Connection: Bluetooth Mesh, *Range Extender (CX-BTE) is highly recommended, see below for details.*



Knuckle: Adjustable cast brass knuckle with thumb screw and 1/2" NPT threaded male hub on bottom.

Wiring: 10 Foot SPT-2W, UL Listed Wire connector sold separately. Quick-locking connectors (**CX-LOC**) are available from Corona Lighting.

Mounting Spike: 8.5" Large Slotted Spike with Brass Threads

Electrical Notes: A remote 12V transformer is required. Options are available from Corona Lighting.
Voltage range for LED module is 9V - 17V (12.5VA).
Proper grease/lubricant is suggested on threaded parts during installation process.


Warranty: Lifetime Warranty on Fixture Housing. Ten Year Warranty on Replaceable LED Module.

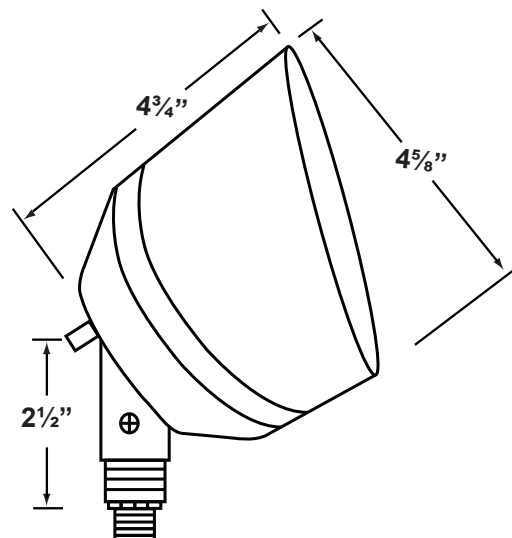

SMART ACCESSORIES

CX-BTE Bluetooth Range Extender

CX-BTG-2 Wireless Bluetooth Mesh Gateway

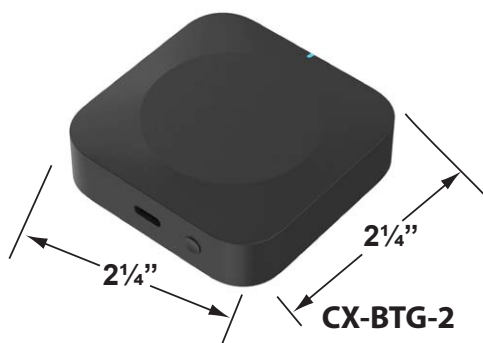

JOB INFORMATION

TYPE: DATE:

JOB NAME & ADDRESS:

PRODUCT #:

TOTAL QUANTITY:

LAMP TYPE & WATTAGE:

TRANSFORMER:

CONTRACTOR:

SPECIFIER:

ACCESSORIES SHEET

PRODUCT # : CL-410-BT-GM

• Directional Lights

• Cast Brass

Mounting Pedestals

CX-603-BK 3" PVC Mounting Pedestal, 1/2" NPT Female Brass Hub on top, **Black**



CX-621-BK 1" PVC Cap, 1/2" NPT, **Black**

CX-621-VG 1" PVC Cap, 1/2" NPT, **Verde Green**

CX-622-BK 2" PVC Cap, 1/2" NPT, **Black**

CX-622-VG 2" PVC Cap, 1/2" NPT, **Verde Green**

CX-624-BK 3" PVC Cap, 1/2" NPT Female Brass Hub, **Black**

Mounting Canopies

CX-705B-GM Brass Flat Canopy, 1/2 NPT, **Gun Metal**

CX-709B-GM Brass Raised Canopy, 1/2 NPT, **Gun Metal**



CX-718B-GM 5" Brass Canopy, 3-Hole 1/2 NPT, **Gun Metal**

CX-719B-GM Brass Tree Mounting Bracket, 1/2" NPT, **Gun Metal**

CX-721B-BK Brass Tree mount Canopy with 15" Rubber Strap stretches to 22", **Black Brass**


CX-722B-BK Brass Tree mount Canopy with 22" Rubber Strap stretches to 33", **Black Brass**

CX-723B-BK Brass Tree mount Canopy with 31" Rubber Strap stretches to 45", **Black Brass**



Ground Spikes

CX-650-BZ 8.5" Slotted ABS Spike, with brass threads 1/2" NPT, **Bronze**

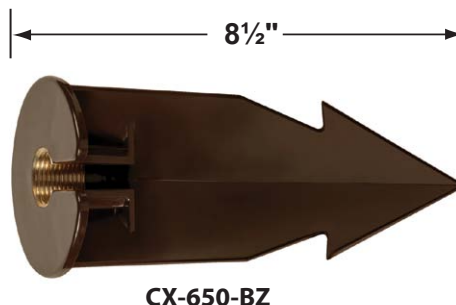

Mounting Risers

CX-682B-GM 6" Brass Riser, 1/2 NPT Male/Female, **Gun Metal**

CX-683B-GM 12" Brass Riser, 1/2 NPT Male/Female, **Gun Metal**

CX-684B-GM 18" Brass Riser, 1/2 NPT Male/Female, **Gun Metal**

CX-685B-GM 24" Brass Riser, 1/2 NPT Male/Female, **Gun Metal**



CX-718B-GM

ACCESSORIES SHEET

PRODUCT # : CL-410-BT-GM

• Directional Lights

• Cast Brass

Mounting Posts For Sign Light & Path Light Applications

- CX-678B-GM 24" Brass Single Head Post, **Gun Metal**
- CX-679B-GM 24" Brass Double Head Post, **Gun Metal**
- CX-690B-GM 18" Brass Single Head Post, **Gun Metal**
- CX-693B-GM 18" Brass Double Head Post, **Gun Metal**


• CX-718B-GM (Mounting Canopies pg 2) is required for sign light installation.



Cable Connector

CX-LOC Quick-locking Cable Connectors, Tan

[\(Installation Instructions\)](#)

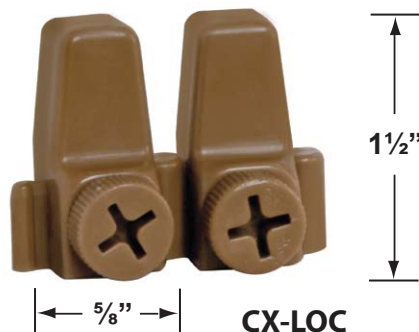

Stainless Steel Pool and Spa Rated Transformers

- T-LT150-Z 150W, 12-15V Smart Zoning Single Circuit [\(Spec Sheet\)](#) | [\(Installation Instructions\)](#)
- T-LT300-Z 300W, 12-15V Smart Zoning Single Circuit [\(Spec Sheet\)](#) | [\(Installation Instructions\)](#)
- T-LTF60 60W, 12V, Compact Mini Transformer
- T-LT75 75W, 12 and 15V, Single Circuit Transformer w/ Integrated Mechanical Timer.
- T-LT150 150W, 12-15V, Single Circuit Transformer.
- T-LT300 300W, 12-15V, Single Circuit Transformer.
- T-LT600 600W, 12-15V, Dual Circuit Transformer.
- T-LT900 900W, 12-22V, Triple Circuit Transformer.
- T-FIDT Field Installed Plug-in Digital Timer.
- T-FIT Field Installed Plug-in Mechanical Timer.
- T-TR-FIP Field Installed Plug-in Photocell



T-LT150-Z