# CORONA Lighting
WWW.CORONALIGHTING.COM

**1633 Staunton Ave**
**Los Angeles, CA 90021**

| TEL. | FAX. |
|---|---|
| (800) 727-9262 | (800) 727-9957 |
| (213) 747-4500 | (213) 747-3234 |

**ARCHITECTURAL GRADE SERIES**

# SPECIFICATION SHEET

E-Mail: sales@coronalighting.com

## PRODUCT # : CL-652B-AB

• **Area Lights**          • **Cast Brass**

## Fixture Specifications:

**Housing:** Brass shade, adjustable in height for light control.

**Stem:** Solid brass pipe with ½" NPT on bottom.

**Finish:** **AB- Antique Bronze**. Natural toning process. AB finish will vary due to artistic process.

**Lens:** Clear glass, cover over lamp providing sprinkler water protection. Frosted lens available.

**Socket:** S.C. Bayonet socket, easy tool free lamp access.

**Lamp:** 12V S.C Bayonet LED.
Available in 3W Bluetooth Mesh RGB-WW;
2W, 2.5W LED or without lamp.
See the Lamp Guide below for more information.

**Gasket:** Silicone "O" ring gasket seals lens to socket housing for water tight sealing.

**Wiring:** Fixture is prewired with a 3-ft 18-2 direct burial cord. Wire connector sold separately. Quick-locking connectors are available from Corona Lighting **(CX-LOC)** find details on page 2.

**Mounting Spike:** Standard injection molded spike with ½" NPT threaded female hub.

**Electrical Notes:** A remote 12V transformer is required. Options are available from Corona Lighting (see page 3). Voltage range for BT lamps are 9-17V, LED are 8-21V. Proper grease/lubricant is suggested on threaded parts during installation process.

**Warranty:** Limited lifetime warranty on fixture housing and stem against manufacturer's defects.



CL-652B-AB
18" Standard
stem showed

5¼"
2½"
23"
8½"
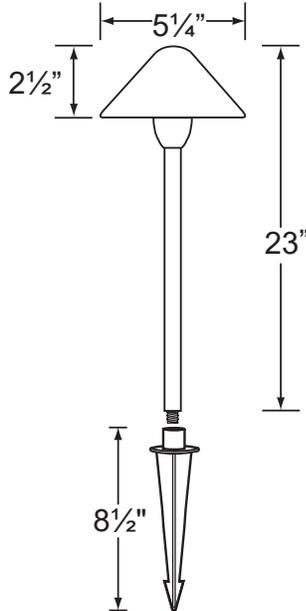
**Stem Options**

CL-652B-AB-12

CL-652B-AB-24
24" Stem shown

**L E D**
**2W, 2.5W & 3W**

### AVAILABLE LED LAMPS *(Corona LED lamps have a **five (5)** year limited warranty against manufacturer's defects)*

| LAMP NUMBER | WATTS | BEAM | | COLOR & TEMP. | RATED HOURS | HALOGEN EQUIVALENT |
|---|---|---|---|---|---|---|
| | | SPREAD | LUMEN | | | |
| L-EDBA-3W-BT | 0.5-3 | 360° | 10-200 | 2200K - 5700K | 50,000 | --- |
| L-EDBA-2W | 2 | 360° | 200 | 2700K | 25,000 | 20 Watt |
| L-EDBA-2.5W | 2.5 | 180° | 240 | 2700K | 25,000 | 35 Watt |
| L-EDBA-2W-3K | 2 | 360° | 210 | 3000K | 25,000 | 20 Watt |
| L-EDBA-2.5W-3K | 2.5 | 180° | 250 | 3000K | 25,000 | 35 Watt |
| L-EDBA-AM✣ | 2 | 360° | 170 | 2000K | 25,000 | 20 Watt |

✣ *AM- Amber color*
*For more additional Lamps, and accessories visit Coronalighting.com*

## JOB INFORMATION

TYPE:                    DATE:

JOB NAME & ADDRESS:

PRODUCT #:

TOTAL QUANTITY:

LAMP TYPE & WATTAGE:

TRANSFORMER:

CONTRACTOR:

SPECIFIER:

● When ordering a halogen or xenon lamp add lamp number to the product number. If you are ordering LED lamps you should follow the format below:

• **CL** - **product #** - **Length** - **lamp** - **wattage**

**CL** - **652B-AB** - **18** - **L-EDBA** - **2W-3K**

Example: CL-652B-AB-18-L-EDBA-2W-3K

1633 Staunton Ave
Los Angeles, CA 90021
TEL.           FAX.
(800) 727-9262   (800) 727-9957
(213) 747-4500   (213) 747-3234

E-Mail: sales@coronalighting.com

# CORONA Lighting
WWW.CORONALIGHTING.COM

**ARCHITECTURAL GRADE SERIES**

# ACCESSORIES SHEET

# PRODUCT # : CL-652B-AB

• Area Lights          • Cast Brass

## Mounting Pedestals

| | |
|---|---|
| CX-601-BK | 1" PVC Mounting Pedestal, ½" NPT, **Black** |
| CX-601-VG | 1" PVC Mounting Pedestal, ½" NPT, **Verde Green** |
| CX-603-BK | 3" PVC Mounting Pedestal, ½" NPT Female Brass Hub on top, **Black** |
| CX-603-VG | 3" PVC Mounting Pedestal, ½" NPT Female Brass Hub on top, **Verde Green** |

← 18" →

**CX-603-BK**
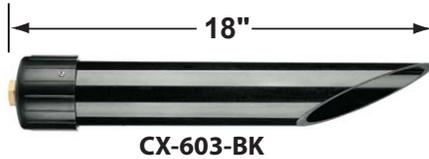
| | |
|---|---|
| CX-604-BK | 1" PVC Adjustable Mounting Pedestal, ½" NPT, **Black** |
| CX-621-BK | 1" PVC Cap, ½" NPT, **Black** |
| CX-621-VG | 1" PVC Cap, ½" NPT, **Verde Green** |
| CX-622-BK | 2" PVC Cap, ½" NPT, **Black** |
| CX-622-VG | 2" PVC Cap, ½" NPT, **Verde Green** |
| CX-624-BK | 3" PVC Cap, ½" NPT Female Brass Hub, **Black** |
| CX-624-VG | 3" PVC Cap, ½" NPT Female Brass Hub, **Verde Green** |

## Mounting Canopies

| | |
|---|---|
| CX-705B-AB | Brass Flat Canopy, ½ NPT, **Antique Bronze** |
| CX-709B-AB | Brass Raised Canopy, ½ NPT, **Antique Bronze** |
| CX-718B-AB | 5" Brass Canopy, 3-Hole ½ NPT, **Antique Bronze** |
| CX-721B-AB | Brass Tree Mount Canopy with 15" Rubber Strap stretches to 22", **Antique Bronze** |
| CX-722B-AB | Brass Tree Mount Canopy with 22" Rubber Strap stretches to 33", **Antique Bronze** |
| CX-723B-AB | Brass Tree Mount Canopy with 31" Rubber Strap stretches to 45", **Antique Bronze** |

1⅛

**CX-709B-AB**

← 2¾" →

5"

**CX-722B-AB**

**CX-718B-AB**

## Ground Spikes

| | |
|---|---|
| CX-642-BK | 8.5" ABS Spike, ½" NPT, **Black** |
| CX-642-BZ | 8.5" ABS Spike, ½" NPT, **Bronze** |
| CX-643-BZ | 8.5" ABS Spike, ½" NPT, **Bronze** |

← 10½" →
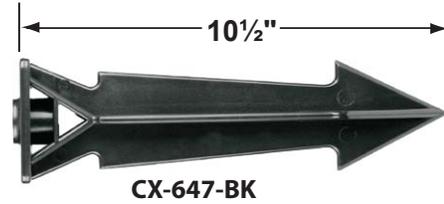
**CX-647-BK**

| | |
|---|---|
| CX-646-BK | 8" ABS Spike, ½" NPT, **Black** |
| CX-646-BR | 8" ABS Spike, ½" NPT, **Natural Brass** |
| CX-646-SS | 8" ABS Spike, ½" NPT, **Stainless Steel** |
| CX-647-BK | 10.5" Heavy Duty ABS Spike, ½" NPT, **Black** |

## Mounting Risers

| | |
|---|---|
| CX-682B-AB | 6" Brass Riser, ½ NPT Male/Female, **Antique Bronze** |
| CX-683B-AB | 12" Brass Riser, ½ NPT Male/Female, **Antique Bronze** |
| CX-684B-AB | 18" Brass Riser, ½ NPT Male/Female, **Antique Bronze** |
| CX-685B-AB | 24" Brass Riser, ½ NPT Male/Female, **Antique Bronze** |

**CX-682B-AB 6"**

**CX-683B-AB 12"**

**CX-684B-AB 18"**

**CX-685B-AB 24"**
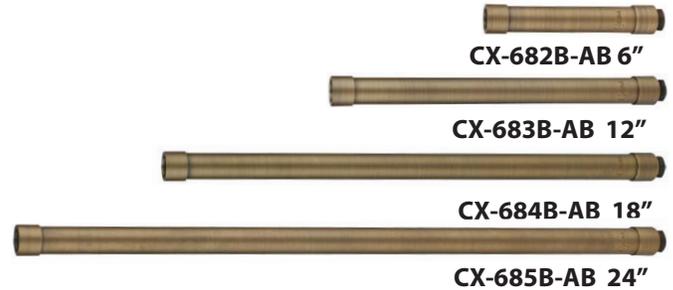
## Cable Connectors

| | |
|---|---|
| CX-LOC | Quick-locking Cable Connectors, **Tan** |
| | (Installation Instructions) |

**CX-LOC**

1½"

⅝"

# CORONA Lighting

WWW.CORONALIGHTING.COM
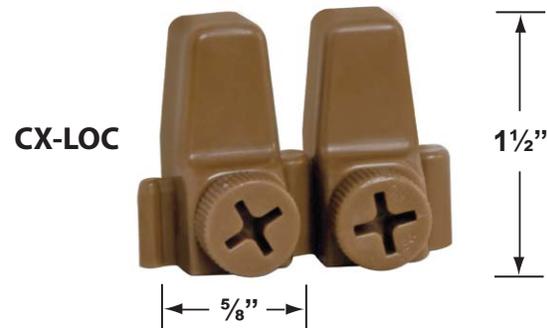
# ACCESSORIES SHEET

## PRODUCT # : CL-652B-AB

• Area Lights

• Cast Brass

### Stainless Steel Pool and Spa Rated Transformers

| | |
|---|---|
| T-LTF60 | 60W, 12V, Compact Mini Transformer |
| T-LT75 | 75W, 12 and 15V, Single Circuit Transformer w/ Integrated Mechanical Timer. |
| T-LT150 | 150W, 12-15V, Single Circuit Transformer. |
| T-LT300 | 300W, 12-15V, Single Circuit Transformer. |
| T-LT600 | 600W, 12-15V, Dual Circuit Transformer. |
| T-LT900 | 900W, 12-22V, Triple Circuit Transformer. |
| T-FIDT | Field Installed Plug-in Digital Timer. |
| T-FIT | Field Installed Plug-in Mechanical Timer. |
| T-TR-FIP | Field Installed Plug-in Photocell |

**T-LT75**

**T-LT150**

**T-FIDT**

**T-LT300**

**T-TR-FIP**

### Dimmers

CX-DIM-100    100W, Low Voltage Dimmer Switch.
Use with T-LT Series Transformers, **Black**

**CX-DIM-100**