

# SPECIFICATION SHEET

## PRODUCT # : CL-410B-BK

• Directional Lights

• Cast Brass

### Fixture Specifications:

**Housing & Shroud:** Corrosion Resistant Cast Brass.

**Finish:** BK- Black Brass

**Lens:** Clear, heat resistant flat glass

**Socket:** PAR36 screw terminal.

**Lamp:** 12V, PAR36 LED  
Available in 15W Bluetooth mesh smart RGB-WW; 6W, 10W, 13W LED or without lamp.  
See Lamp Guide below for more information.

**Wiring:** Fixture is prewired with a 3-ft 18-2 SPT2-W direct burial cord. Wire connector sold separately.  
Quick-locking connectors (**CX-LOC**) are available from Corona Lighting.


**Gasket:** Silicone double gasketed for water tight sealing

**Knuckle:** Adjustable cast brass knuckle with thumb screw and  $\frac{1}{2}$ " NPT threaded male hub on bottom.


**Mounting Spike:** 8.5" Large slotted spike with brass threads

**Electrical Notes:** A remote 12V transformer is required. See page 3 for options. Voltage range for BT lamps are 9-17V, LED are 9-24V. Proper grease/lubricant is suggested on threaded parts during installation process.

**Warranty:** Limited lifetime warranty on fixture housing against manufacturer's defects.



**6W, 10W, 13W & 15W**

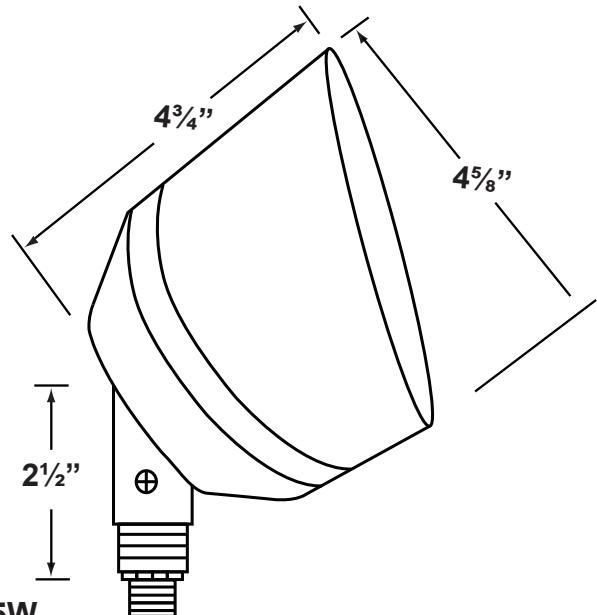

### AVAILABLE LED LAMPS

(Corona LED lamps have a five (5) year limited warranty against manufacturer's defects)

LAMP NUMBER	WATTS	BEAM SPREAD	LUMEN	COLOR & TEMP.	RATED HOURS	HALOGEN EQUIVALENT
L-ED36-15W-BT	1W-15W	15° / 38° / 60°	25-1200	2200K-5700K	50,000	----
L-ED36-6W-FL	6	45° Flood	610	2700K	50,000	35 Watt
L-ED36-6W-WF	6	60° Wide Flood	610	2700K	50,000	35 Watt
L-ED36-10W-FL	10	45° Flood	800	2700K	50,000	50 Watt
L-ED36-10W-WF	10	60° Wide Flood	800	2700K	50,000	50 Watt
L-ED36-13W-FL	13	45° Flood	1150	2700K	50,000	75 Watt
L-ED36-13W-WF	13	60° Wide Flood	1150	2700K	50,000	75 Watt

### JOB INFORMATION

TYPE: DATE:

JOB NAME & ADDRESS:

PRODUCT #:

TOTAL QUANTITY:

LAMP TYPE & WATTAGE:

TRANSFORMER:

CONTRACTOR:

SPECIFIER:

For more additional Lamps, and accessories visit [Coronalighting.com](http://Coronalighting.com)

• When ordering LED lamp with a fixture your part number should follow the format below:

• CL - **product #** - **lamp** - **wattage** - **lamp angle** Example: CL-410B-BK-L-ED36-9W-FL

CL - **410B-BK** - **L-ED36** - **9W** - **FL**


• Corona Lighting reserves the right to make any change and/or improvement to the design and construction of this fixture without further notification.

# ACCESSORIES SHEET

## PRODUCT # : CL-410B-BK

### Mounting Pedestals

CX-603-BK 3" PVC Mounting Pedestal,  $\frac{1}{2}$ " NPT Female Brass Hub on top, **Black**

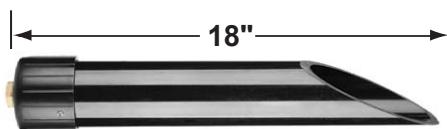
**CX-603-BK**

CX-621-BK 1" PVC Cap,  $\frac{1}{2}$ " NPT, **Black**

CX-622-BK 2" PVC Cap,  $\frac{1}{2}$ " NPT, **Black**

CX-624-BK 3" PVC Cap,  $\frac{1}{2}$ " NPT Female Brass Hub, **Black**

### Mounting Canopies

CX-705B-BK Brass Flat Canopy,  $\frac{1}{2}$  NPT, **Black Brass**

CX-709B-BK Brass Raised Canopy,  $\frac{1}{2}$  NPT, **Black Brass**

CX-718-BK 5" Aluminum Canopy, 3-Hole  $\frac{1}{2}$  NPT, **Black**

CX-719B-BK Brass Tree Mounting Bracket, 1/2" NPT, **Black Brass**

CX-721B-BK Brass Tree mount Canopy with 15" Rubber Strap stretches to 22", **Black Brass**

CX-722B-BK Brass Tree mount Canopy with 22" Rubber Strap stretches to 33", **Black Brass**

CX-723B-BK Brass Tree mount Canopy with 31" Rubber Strap stretches to 45", **Black Brass**


**CX-705B-BK**

**CX-718-BK**

**CX-722B-BK**


**CX-709B-BK**

- Directional Lights

- Cast Brass


### Ground Spike Supplied

CX-650-BZ 8 1/2" h x 3" w Slotted ABS Spike with Brass Threads,  $\frac{1}{2}$ " NPT, **Bronze**

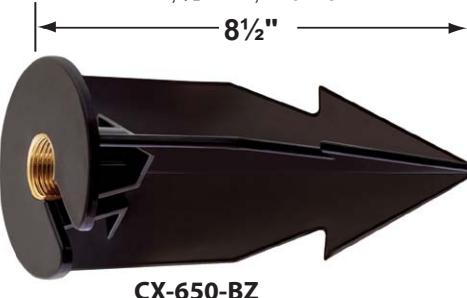
**CX-650-BZ**

### Optional Ground Spikes

CX-646-BR 8" h x  $\frac{1}{2}$ " w Brass Spike,  $\frac{1}{2}$ " NPT, **Natural Brass**

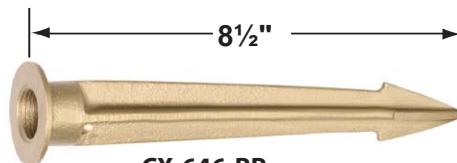
**CX-646-BR**

### Mounting Risers

CX-782B-BK 6" Brass Riser,  $\frac{1}{2}$  NPT Male/Female, **Black Brass**

CX-783B-BK 12" Brass Riser,  $\frac{1}{2}$  NPT Male/Female, **Black Brass**

CX-784B-BK 18" Brass Riser,  $\frac{1}{2}$  NPT Male/Female, **Black Brass**

CX-785B-BK 24" Brass Riser,  $\frac{1}{2}$  NPT Male/Female, **Black Brass**


**CX-782B-BK 6"**

**CX-783B-BK 12"**

**CX-784B-BK 18"**

**CX-785B-BK 24"**

**CX-719B-BK**

# ACCESSORIES SHEET

## PRODUCT # : CL-410B-BK

• Directional Lights

• Cast Brass

### Stainless Steel Pool and Spa Rated Transformers

T-LTF60	60W, 12V, Compact Mini Transformer
T-LT75	75W, 12 and 15V, Single Circuit Transformer w/ Integrated Mechanical Timer.
T-LT150	150W, 12-15V, Single Circuit Transformer.
T-LT300	300W, 12-15V, Single Circuit Transformer.
T-LT600	600W, 12-15V, Dual Circuit Transformer.
T-LT900	900W, 12-22V, Triple Circuit Transformer.
T-FIDT	Field Installed Plug-in Digital Timer.
T-FIT	Field Installed Plug-in Mechanical Timer.
T-TR-FIP	Field Installed Plug-in Photocell


**T-LT75**

**T-LT150**


**T-FIDT**

**T-LT300**

**T-TR-FIP**

### Cable Connectors

**CX-LOC** Quick-locking Cable Connectors, Tan  
[\(Installation Instructions\)](#)

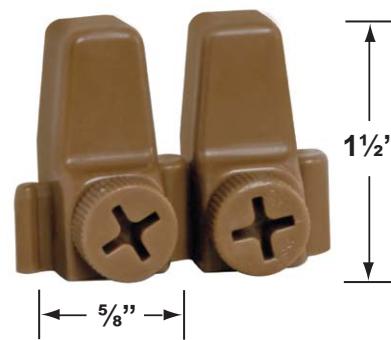

### Dimmer

**CX-DIM-100** 100W, Low Voltage Dimmer Switch.  
Use with T-LT Series Transformers, **Black**


**CX-DIM-100**