

SPECIFICATION SHEET

PRODUCT # : CL-490-BT-BK


•Directional Lights

• Cast Brass

Fixture Specifications:


Housing: Corrosion resistant cast brass
Finish: BK-Black Brass
Light Source: Integrated 1-2W RGB LED module. Lumen output is between 15LM - 100LM. 45° beam spread
LED Features: CCT Options: Presets: 2700K, 3000K, 4000K, 5000K
 RGB : Unlimited color wheel options & quick presets.
 Dimming: Every color choice
 Scenes: Customizable scenes with up to 8 colors.
 Compatibility: Amazon's Alexa* and Google Home* (***CX-BTG** gateway required, see below)
 Music: The lights will follow music collected by a device's microphone.
Dimensions: 4¾" (bottom) & 1¼" (top) W x 3" H
Connection: Bluetooth Mesh, *Range Extender (CX-BTE) is highly recommended, see below for details.*
Mounting: 304 Stainless Steel, Directional/Underwater bracket rotates 180° for light control

Wiring: Fixture is prewired with a 10ft SPT-1W wire. Wire connector sold separately. Quick-locking connectors (**CX-LOC**) are available. See page 2 for information.
Applications: Suitable for "SHALLOW" fountains, ponds, waterfalls, stone lanterns, Rock Beds, Any place a small beam of light is needed. Do not use in Swimming Pools, lakes or spas. **Fixture should be installed 3"-4" above waterline for the best BT reception.** Glare Shield is included.
Electrical Notes: A remote 12V magnetic transformer is required. Options are available from Corona Lighting. Not for use with electronic transformers. Voltage range for LED module is: 9-17V (2.5VA), Ambient temperature: -22°F to 176°F CRI: >85 Proper grease/lubricant is suggested on threaded parts during installation process.
Warranty: 10 year warranty, with a rated life of 50,000 hours.

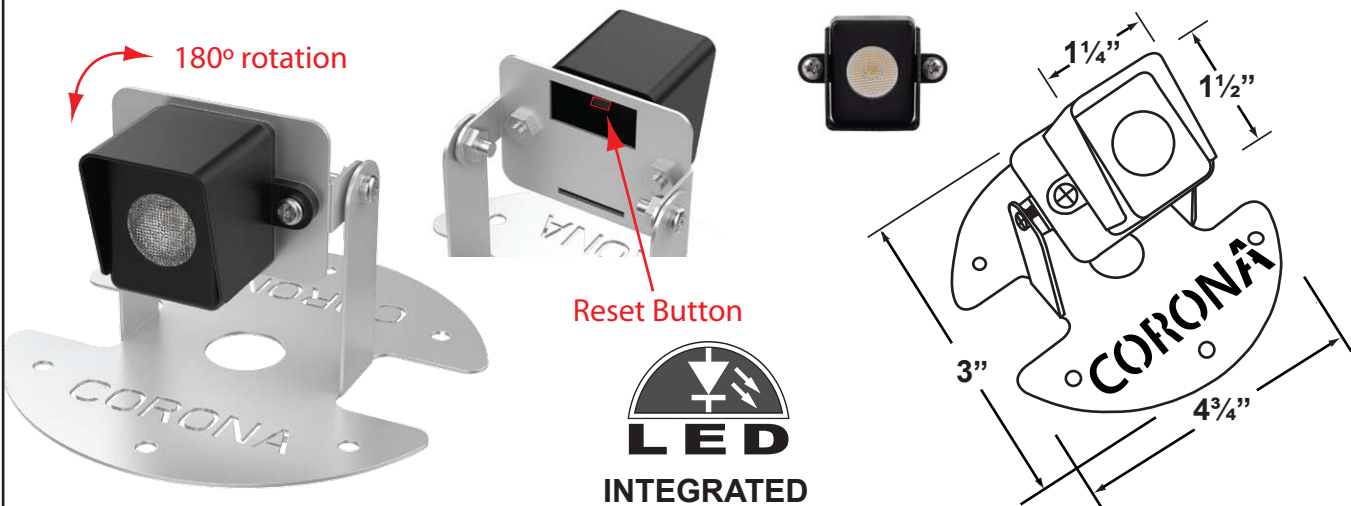

SMART ACCESSORIES

CX-BTE Bluetooth Range Extender
 CX-BTG Wireless Bluetooth Mesh Gateway

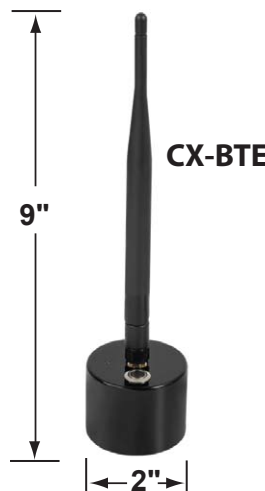

JOB INFORMATION

TYPE: DATE:
 JOB NAME & ADDRESS:
 PRODUCT #:
 TOTAL QUANTITY:
 LAMP TYPE & WATTAGE:
 TRANSFORMER:
 CONTRACTOR:
 SPECIFIER:

PRODUCT # : CL-490-BT-BK

• Specialty Lights

• Cast Brass

Stainless Steel Pool and Spa Rated Transformers

- T-LTF60 60W, 12V, Compact Mini Transformer
- T-LT75 75W, 12 and 15V, Single Circuit Transformer w/ Integrated Mechanical Timer.
- T-LT150 150W, 12-15V, Single Circuit Transformer.
- T-LT300 300W, 12-15V, Single Circuit Transformer.
- T-LT600 600W, 12-15V, Dual Circuit Transformer.
- T-LT900 900W, 12-22V, Triple Circuit Transformer.
- T-FIDT Field Installed Plug-in Digital Timer.
- T-FIT Field Installed Plug-in Mechanical Timer.
- T-TR-FIP Field Installed Plug-in Photocell



T-LT75



T-LT150



T-FIDT




T-LT300



T-TR-FIP

Cable Connector

- CX-LOC Quick-locking Cable Connectors, Tan
[\(Installation Instructions\)](#)

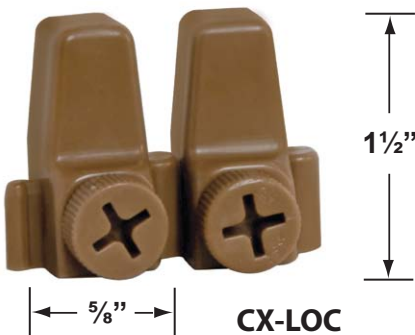

CX-LOC



T-LT600