

SPECIFICATION SHEET

PRODUCT # : CL-445-BT-AB

• Fence/Wall Lights

• Cast Brass

Housing: Corrosion Resistant Cast Brass

Finish: **AB-** Antique Bronze
Finishes may vary due to artistic process
Also available in **BK** and **WH**

Light Source: 1W- 3W RGB-WW LED module. Lumen output is between 20LM - 150LM. Allows for 90° beam spread. 20W Halogen Equivalent, 50,000 Rated Hours, 2700K-5000K color temperature, CRI: >90

LED Features: 2.4 ghz External antenna and Reset button.
CCT Options: Presets: 2700K, 3000K, 4000K, 5000K
RGB : Unlimited color wheel options & quick presets.
Dimming: Every color choice
Scenes: Customizable scenes with up to 8 colors.
Compatibility: Amazon's Alexa* and Google Home*
(***CX-BTG-2** gateway required, see below)
Music: The lights will follow music collected by a device's microphone.

Connection: Bluetooth Mesh, *Range Extender (CX-BTE) is highly recommended, see below for details.*

Antenna: External, 2.4 GHZ

Ambient Temp: -13° Fahrenheit to 140° Fahrenheit

Wiring: Fixture is prewired with a 10-ft 18-2 SPT-1W direct burial cord, Wire connector sold separately. Quick-locking connectors (**CX-LOC**) are available from Corona Lighting, see page 2 for details

Mounting: Surface mounted, best used for Walls, Fence Posts, Around Pools, and Other Outdoor Living Areas



Electrical Notes: A remote 12V transformer is required. Options are available from Corona Lighting, see page 2 for info. Voltage range for LED module is 9-17V AC/DC (2.57VA). Proper grease/lubricant is suggested on threaded parts during installation process.

IP Rating IP67

Warranty: Lifetime Warranty on Fixture Housing. Ten Year Warranty on LED Module




Reset Button

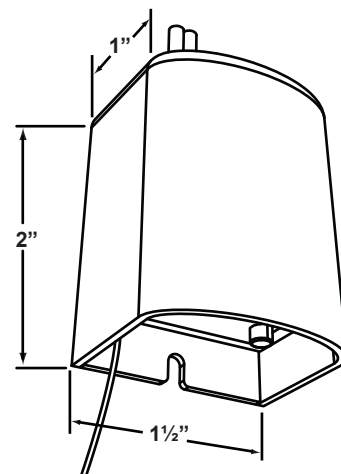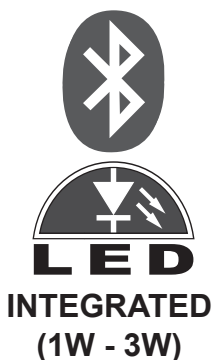

SMART ACCESSORIES

CX-BTE Bluetooth Range Extender
CX-BTG-2 Wireless Bluetooth Mesh Gateway

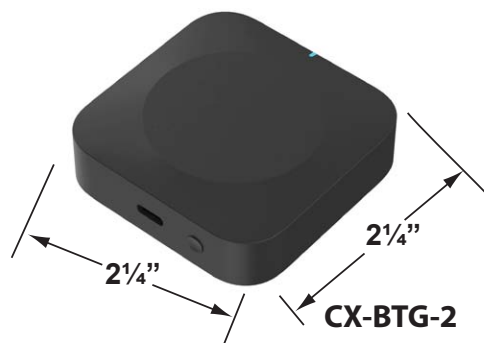

CX-BTG-2



CX-BTE

JOB INFORMATION

TYPE: DATE:

JOB NAME & ADDRESS:

PRODUCT #:

TOTAL QUANTITY:

LAMP TYPE & WATTAGE:

TRANSFORMER:

CONTRACTOR:

SPECIFIER:

PRODUCT # : CL-445-BT-AB

• Fence/Wall Lights

• Cast Brass

Stainless Steel Pool and Spa Rated Transformers

- T-LT150-Z 150W, 12-15V Smart Zoning Single Circuit
([Spec Sheet](#)) | ([Installation Instructions](#))
- T-LT300-Z 300W, 12-15V Smart Zoning Single Circuit
([Spec Sheet](#)) | ([Installation Instructions](#))
- T-LTF60 60W, 12V, Compact Mini Transformer
- T-LT75 75W, 12 and 15V, Single Circuit Transformer
w/ Integrated Mechanical Timer.
- T-LT150 150W, 12-15V, Single Circuit Transformer.
- T-LT300 300W, 12-15V, Single Circuit Transformer.
- T-LT600 600W, 12-15V, Dual Circuit Transformer.
- T-LT900 900W, 12-22V, Triple Circuit Transformer.
- T-FIDT Field Installed Plug-in Digital Timer.
- T-FIT Field Installed Plug-in Mechanical Timer.
- T-TR-FIP Field Installed Plug-in Photocell



T-LT150-Z



T-LT300




T-FIDT



T-LT300-Z

Cable Connector

- CX-LOC Quick-locking Cable Connectors, Tan
([Installation Instructions](#))

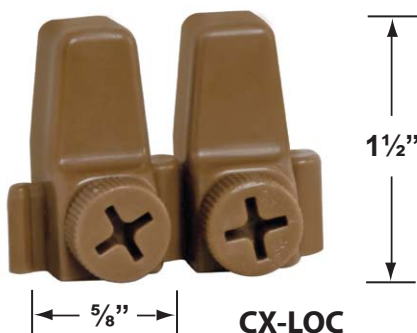

CX-LOC



T-LT150



T-TR-FIP