

SPECIFICATION SHEET

E-Mail: sales@coronalighting.com

PRODUCT # : CL-MINI-BT-BK

• Specialty Lights

• Cast Brass

Fixture Specifications:

Housing: Corrosion resistant cast brass

Finish: BK-Black Brass

Light Source: Replacable 1-2W RGB LED module. Lumen output is between 15LM - 100LM. 45° beam spread

LED Features: CCT Options: Presets: 2700K, 3000K, 4000K, 5000K
RGB : Unlimited color wheel options & quick presets.
Dimming: Every color choice
Scenes: Customizable scenes with up to 8 colors.
Compatibility: Amazon's Alexa and Google Home
Music: The lights will follow music collected by a phone microphone.

Mouting: Optional 6" stainless steel stake

Rating IP68

Dimensions: 1 1/4" W x 7 1/4" L

Wiring:

Fixture is prewired with a 10ft SPT-1W wire. Wire connector sold separately. Silicone filled wire nuts (**CX-854**) and quick-locking connectors (**CX-LOC**) are available from Corona Lighting.

Applications:

Suitable for fountains, ponds, waterfalls, stone lanterns, rock beds, underneath steps, etc. Any place a small beam of light is needed. Do not use in Swimming pools, lakes or spas.



Glare shield & optional stake are included.

Electrical Notes:

A remote 12V magnetic transformer is required. Options are available from Corona Lighting. Not for use with electronic transformers. Voltage range for LED module is: 9-17V, Ambient temperature: -22°F to 176°F CRI: >80 Proper grease/lubricant is suggested on threaded parts during installation process.

Warranty:


10 year warranty, with a rated life of 50,000 hours.

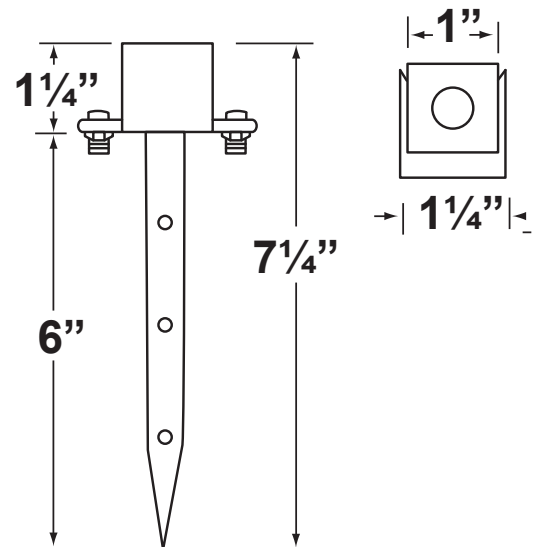

SMART ACCESSORIES

CX-BTE Bluetooth Range Extender

CX-BTG Wireless Bluetooth Mesh Gateway

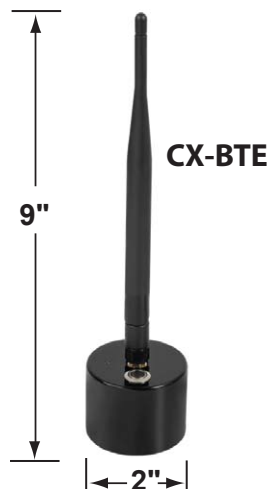

JOB INFORMATION

TYPE:

DATE:

JOB NAME & ADDRESS:

PRODUCT #:

TOTAL QUANTITY:

LAMP TYPE & WATTAGE:

TRANSFORMER:

CONTRACTOR:

SPECIFIER:

PRODUCT # : CL-MINI-BK

• Specialty Lights

• Cast Brass

Stainless Steel Pool and Spa Rated Transformers

- T-LTF60 60W, 12V, Compact Mini Transformer
- T-LT75 75W, 12 and 15V, Single Circuit Transformer w/ Integrated Mechanical Timer.
- T-LT150 150W, 12-15V, Single Circuit Transformer.
- T-LT300 300W, 12-15V, Single Circuit Transformer.
- T-LT600 600W, 12-15V, Dual Circuit Transformer.
- T-LT900 900W, 12-22V, Triple Circuit Transformer.
- T-FIDT Field Installed Plug-in Digital Timer.
- T-FIT Field Installed Plug-in Mechanical Timer.
- T-TR-FIP Field Installed Plug-in Photocell



T-LT75



T-LT150



T-FIDT



T-LT300



T-TR-FIP