CORONA Lighting
WWW.CORONALIGHTING.COM

1633 Staunton Ave
Los Angeles, CA 90021

TEL.
(800) 727-9262
(213) 747-4500

FAX.
(800) 727-9957
(213) 747-3234

E-Mail: sales@coronalighting.com

ARCHITECTURAL GRADE SERIES

SPECIFICATION SHEET

PRODUCT # : CL-298-BZ-3K

•Rail Lights   • Aluminum

Fixture Specifications:

Light Bar Housing: Die-Cast Aluminum. Replaceable LED Capsule. Fully Potted.

Finish: **BZ- Bronze**.

Lighting Source: Integrated LED Strip (12 Chips), Wattage: 2W, beam. Spread: 120 Degree, Light Output: 110 Lumens, Color Temperature: **3000K** Cool White. Operating Voltage: 9-17V AC. CRI: RA >85. Halogen Equivalent: 20W. Ambient Operating Temperature: -4° F - 122° F

Features: IP65. Suitable for Damp Locations. Rated for Outdoor. Dimmable with magnetic transformers.
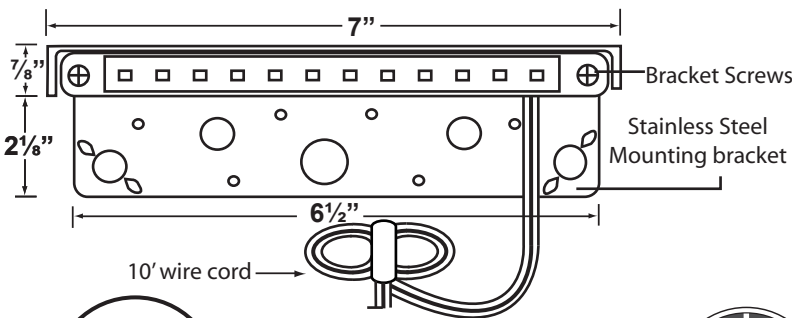
Dimensions: 7" X ⅞"

Warranty: 10 year warranty, with a rated life of 50,000 hours.

Wiring: Fixture is prewired with a 10-ft 18-2 direct burial cord,pre-stripped for easy connection, wire connector sold seperately. Universal connector (**CX-839**), silicone filled wire nut (**CX-854**) or quick locking wire connector (**CX-LOC**) are available from Corona Lighting.

Mouting Brackets: Stainless Steel Mounting Bracket is removable for further applications. Break off corners for easy installation. Additional shorter Mounting Brackets (Small and "L" Shape) provided. Supplied with Wall Anchors and Screws.

Electrical Notes: A remote 12V magnetic transformer is required, can be be ordered from Corona Lighting, seperately. Not for use with electronic transformer. Increasing voltage above 12 volts AC may decrease life of LED chips.

Applications: Retaining walls, Patios, Gazebos, Decks, Benches, Stairs, and Outdoors Living Spaces.

7"

⅞"

2⅛"

6½"

Bracket Screws

Stainless Steel Mounting bracket

10' wire cord

10 YEAR WARRANTY

L E D
INTEGRATED

INTERTEK
ETL
LISTED
US

Replaceable LED Capsule

LED Capsule, is attached to the housing with two S.S. screws, making it simple to remove and install.

Housing

SS. Screws (on LED Capsule)

Removable LED Capsule
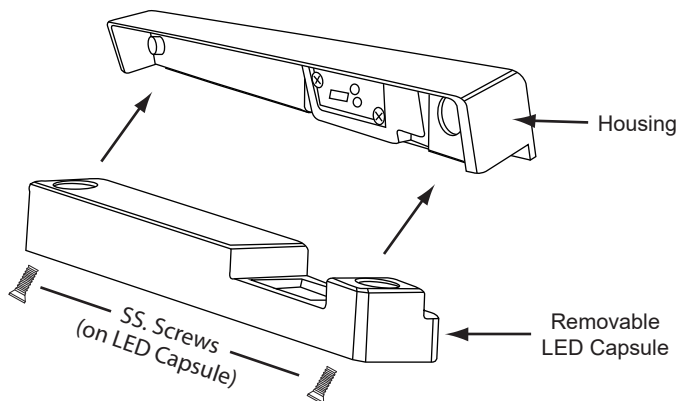
JOB INFORMATION

TYPE: **DATE:**

JOB NAME & ADDRESS:

PRODUCT #:

TOTAL QUANTITY:

LAMP TYPE & WATTAGE:

TRANSFORMER:

CONTRACTOR:

SPECIFIER:

• Corona Lighting reserves the right to make any change and/or improvement to the design and construction of this fixture without further notification.

CORONA Lighting
WWW.CORONALIGHTING.COM

1633 Staunton Ave
Los Angeles, CA 90021
TEL. (800) 727-9262 (213) 747-4500
FAX. (800) 727-9957 (213) 747-3234
E-Mail: sales@coronalighting.com

ARCHITECTURAL GRADE SERIES

ACCESSORIES SHEET

PRODUCT # : CL-298-BZ-3K

• Rail Lights   • Aluminum

INCLUDED

Stainless Steel Brackets

Short Bracket

"L" Shaped
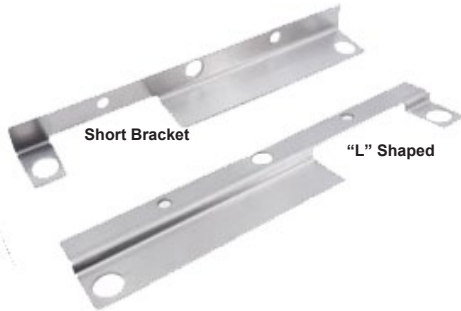
Wall Anchors

OFFERED SEPERATELY

Additional LED CAPSULE

CX-LEDCAP-27K   Replacement LED Capsule, 2700K

CX-LEDCAP-3K   Replacement LED Capsule, 3000K

CX-LEDCAP-27K

Cable Connectors

CX-854   Direct Burial Silicone Filled Wire Nut, **Tan**

CX-858   Speedy Cable Connector, Supply Cable up to 10-2, **Black**

CX-839   Universal cable connector, Supply cable up to 8-2, one/Pack **Black**

CX-LOC   Quick-Locking Silicone Filled Wire Connector, 25 Sets (50 per Pack)

CX-LOC

1½"

⅝"

②