

SPECIFICATION SHEET

PRODUCT # : ES-2603

• 120V Flood Light

• Aluminum

Fixture Specifications:

Housing: Vandal and corrosion resistant injection molded polycarbonate with anodized aluminum reflector. Suitable for wet location.

Finish: Available in **BK- Black**, **GR- Green** and **WH- White**.

Lens: High impact clear polycarbonate prismatic lens

Socket: Top grade GX23 base bi-pin sockets

Lamp: 120V, PL Compact Fluorescent, 2x13W. Supplied with two (2) L-PL13, 13W Warm White (2700K) Twin Tube. 13W Cool White (4100K) twin tube is also available.

Wiring: Fixture is prewired with a 7inch 18-3 VW-1 direct burial cord. Wire connector sold separately. Universal connector (**CX-839**) is available from Corona Lighting.

Gasket: Tabular silicone lens gasket. Seals lens and housing, providing weather-tight protection.

Ballast: 120 volts, normal power factor.

Knuckle: 3"x½" threaded cast aluminum swivel knuckle for flexible aiming.



Mounting: ½" NPT male hub. Optional mounting accessories are available from Corona Lighting (see below).

Electrical Notes: A remote 120V transformer required, may be ordered to Corona Lighting separately. Voltage range for 120V Fluorescent lamps are 120V-129V Proper grease/lubricant is suggested on threaded parts during installation process.

Warranty: One (1) year limited warranty on fixture housing and faceplate against manufacturer's defects.



ES-1303-BK shown

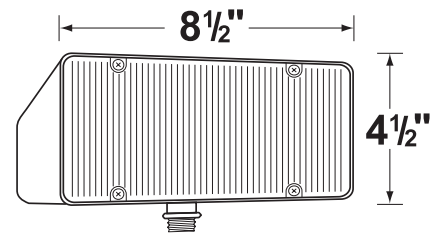

MOST COMMON ACCESSORIES USED WITH THIS FIXTURE



Mounting Spikes

CX-641-BK 6" height
CX-643-BK 8.5" height
CX-646-BK 8" height



Mounting Canopies

CX-701-BK Round Canopy
CX-702-BK Rectangle Canopy
CX-703 Tree Mount

BK - Black
VG- Verde Green



Mounting Brackets

CX-700 3¾" length
CX-704 3½" length

BK - Black
VG- Verde Green

JOB INFORMATION

TYPE: DATE:

JOB NAME & ADDRESS:

PRODUCT #:

TOTAL QUANTITY:

LAMP TYPE & WATTAGE:

TRANSFORMER:

CONTRACTOR:

SPECIFIER: