

SPECIFICATION SHEET

E-Mail: sales@coronalighting.com

PRODUCT # : CL-602

•Area Lights

• Aluminum

Fixture Specifications:

Housing: Interlocking die-cast aluminum sections, assembled with three (3) stainless steel screws.

Stem: Die-cast aluminum stem with ½" NPT on bottom.

Finish: Polyester UV powder coated, in **BK-Black**

Lens: Frosted tempered glass.

Socket: Top grade fixed ceramic bi-pin socket. Easy tool free lamp access.

Lamp: 12V T3 LED.
Available in 3W Bluetooth Mesh smart RGB-WW;
2W, 2.5W LED or without lamp.
See the Lamp Guide below for more information.

Wiring:

Fixture is prewired with a 3ft 18-2 direct burial cord. Wire connector sold separately. Quick-locking connectors are available from Corona Lighting (**CX-LOC**) find details on page 3.

Mounting Spike:

6" cast aluminum spike with ½" NPT female hub

Electrical Notes:



Voltage range for BT lamps are 9-17V, LED are 8-21V. A remote 12V transformer is required. See page 3 for available options
Proper grease/lubricant is suggested on threaded parts during installation process.

Warranty:

Limited one (1) year warranty on fixture housing and stem against manufacturer's defects.



GR- Green finish shown

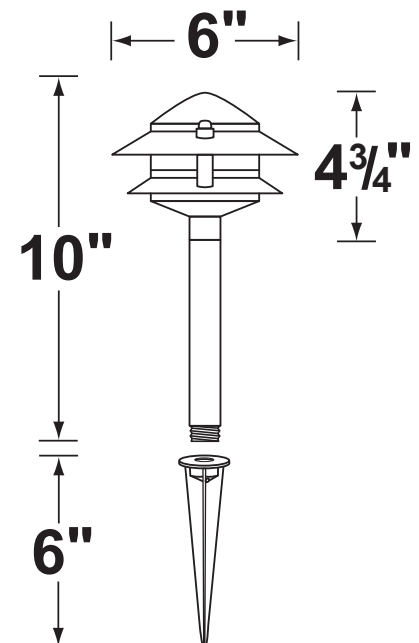

AVAILABLE LED LAMPS (Corona LED lamps have a five (5) year limited warranty against manufacturer's defects)

LAMP NUMBER	WATTS	BEAM		COLOR & TEMP.	RATED HOURS	HALOGEN EQUIVALENT
		SPREAD	LUMEN			
L-EDT3-3W-BT	0.5-3	360°	10-200	2200K-5700K	50,000	---
L-EDT3-2W	2	360°	200	2700K	25,000	20 Watt
L-EDT3-2.5W	2.5	180°	240	2700K	25,000	35 Watt
L-EDT3-2W-3K	2	360°	210	3000K	25,000	20 Watt
L-EDT3-2.5W-3K	2.5	180°	250	3000K	25,000	35 Watt
L-EDT3-AM*	2	360°	170	2000K	25,000	20 Watt

AM- Amber color
For more additional Lamps, and accessories visit Coronalighting.com

JOB INFORMATION

TYPE: DATE:

JOB NAME & ADDRESS:

PRODUCT #:

TOTAL QUANTITY:

LAMP TYPE & WATTAGE:

TRANSFORMER:

CONTRACTOR:

SPECIFIER:

• When ordering LED lamp with a fixture your part number should follow the format below:

• CL - product # - color - lamp - wattage
CL - 602 - GR - L-EDT3 - 2W-3K

Example: CL-602-GR-L-EDT3-2W-3K

• Corona Lighting reserves the right to make any change and/or improvement to the design and construction of this fixture without further notification.

ACCESSORIES SHEET

E-Mail: sales@coronalighting.com


PRODUCT # : CL-602

• Area Lights

• Aluminum

Mounting Pedestals

CX-603-BK 3" PVC Mounting Pedestal, ½" NPT Female Brass Hub on top, **Black**

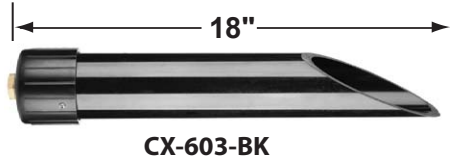

CX-603-BK

CX-621-BK 1" PVC Cap, ½" NPT, **Black**

CX-622-BK 2" PVC Cap, ½" NPT, **Black**

CX-624-BK 3" PVC Cap, ½" NPT Female Brass Hub, **Black**

Mounting Canopies

CX-701-BK Aluminum Mini 3 Hole Round Canopy, ½ NPT, **Black**

CX-702-BK Aluminum Rectangular Canopy, ½ NPT, **Black**

CX-709 Aluminum Raised Canopy, ½" NPT.
Finishes: **BK**- Black, **BZ**- Bronze , **WH**- White

CX-718 5" Aluminum Canopy, 3-Hole ½" NPT.
Finishes: **BK**- Black, **BZ**- Bronze , **WH**- White

CX-721 Aluminum Tree Mount Canopy with 15" Rubber Strap stretches to 22"
Finishes: **BK**- Black, **BZ**- Bronze , **WH**- White

CX-722 Aluminum Tree mount Canopy with 22" Rubber Strap stretches to 33"
Finishes: **BK**- Black, **BZ**- Bronze , **WH**- White

CX-723 Aluminum Tree Mount Canopy with 31" Rubber Strap stretches to 45"
Finishes: **BK**- Black, **BZ**- Bronze , **WH**- White



CX-722-BK




CX-718-BZ

Ground Spikes

CX-640-BK 6" Aluminum Spike, ½" NPT Male Hub, **Black**

CX-642 8½"h x ½"w ABS Spike, ½" NPT, **Black, Bronze**

CX-643-BZ 8½"h x 3"w ABS Spike, ½" NPT, **Bronze**

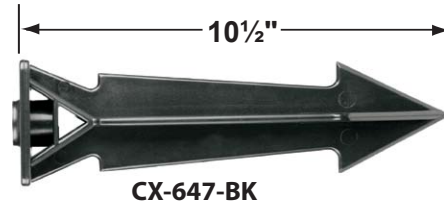

CX-647-BK

CX-646-BK 8" ABS Spike, ½" NPT, **Black**

CX-646-BR 8"h x ½"w Brass Spike, ½" NPT, **Natural Brass**

CX-647-BK 10.5" Heavy Duty ABS Spike, ½" NPT, **Black**

CX-650-BZ 8.5" Slotted ABS Spike with Brass Treads, **Bronze**

Mounting Risers

CX-671 6" Aluminum Riser, ½ NPT Male/Female
Finishes: **BK**- Black, **BZ**- Bronze, **GR**- Green,
GT- Granite, **RT**- Rust, **VG**- Verde Green,
WH- White

CX-672 12" Aluminum Riser, ½ NPT Male/Female
Finishes: **BK**- Black, **BZ**- Bronze, **GR**- Green,
GT- Granite, **RT**- Rust, **VG**- Verde Green,
WH- White

CX-673 18" Aluminum Riser, ½ NPT Male/Female
Finishes: **BK**- Black, **BZ**- Bronze, **GR**- Green,
GT- Granite, **RT**- Rust, **VG**- Verde Green,
WH- White



CX-671-BK 6"



CX-672-BK 12"



CX-673-BK 18"

CX-709-BK



ACCESSORIES SHEET

PRODUCT # : CL-602

• Area Lights

• Aluminum

Mounting Brackets

CX-700 Aluminum Bracket, ½" NPT
Finishes: **BK**- Black, **BZ**- Bronze, **GR**- Green,
GT- Granite, **RT**- Rust, **VG**- Verde Green,
WH- White

CX-704 Aluminum Bracket, ½" NPT
Finishes: **BK**- Black, **BZ**- Bronze, **GR**- Green,
GT- Granite, **RT**- Rust, **VG**- Verde Green,
WH- White

CX-700-BK




CX-704-BK



Cable Connectors

CX-LOC Quick-locking Cable Connectors, Tan
([Installation Instructions](#))

CX-LOC

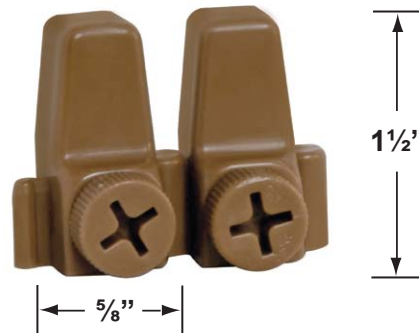

Stainless Steel Pool and Spa Rated Transformers

T-LTF60 60W, 12V, Compact Mini Transformer
T-LT75 75W, 12 and 15V, Single Circuit Transformer
w/ Integrated Mechanical Timer.
T-LT150 150W, 12-15V, Single Circuit Transformer.
T-LT300 300W, 12-15V, Single Circuit Transformer.
T-LT600 600W, 12-15V, Dual Circuit Transformer.
T-LT900 900W, 12-22V, Triple Circuit Transformer.
T-FIDT Field Installed Plug-in Digital Timer.
T-FIT Field Installed Plug-in Mechanical Timer.
T-TR-FIP Field Installed Plug-in Photocell

T-LT75



T-FIDT



T-LT300

