

## SPECIFICATION SHEET

E-Mail: sales@coronalighting.com

### PRODUCT # : CL-450-BT-BK

• Rail Lights

• Cast Brass

#### Fixture Specifications:

**Housing:** Die-Cast Brass with Fully Rotatable Shroud to Control Light Direction

**Finish:** BK- Black

**Lens:** Frosted Lens with Reset Button

**Light Source:** Replacable 1-4W RGB-WW LED module. Lumen output is between 15-250LM. Standard 120° Beam Spread.


**LED Features:** CCT Options: Presets: 2700K, 3000K, 4000K, 5000K  
RGB : Unlimited color wheel options & quick presets.  
Dimming: Every color choice  
Scenes: Customizable scenes with up to 8 colors.  
Compatibility: Amazon's Alexa and Google Home Music: The lights will follow music collected by a phone microphone.

**Wiring:** Fixture is prewired with a 10ft SPT1W (UL listed) direct burial cord. Wire connector sold separately. Quick-locking connectors (**CX-LOC**) are available from Corona Lighting.



**Mounting Bracket:** Stainless Steel Bracket is removable for further applications. Short & L shaped mounting brackets also provided.

**Electrical Notes:** A remote 12V transformer is required. Options are available from Corona Lighting. Voltage range for LED module is 9V-17V (7.5VA). Proper grease/lubricant is suggested on threaded parts during installation process.

**Warranty:** Lifetime warranty on fixture housing. Ten (10) year warranty on LED module.

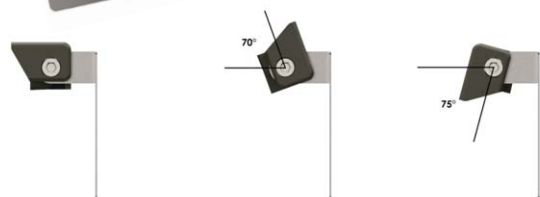

The pivoting head can be angled down to 75° and up to 70°

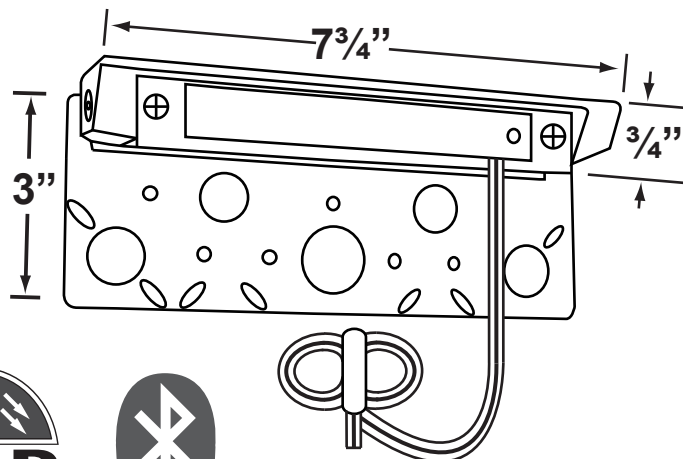

#### SMART ACCESSORIES

CX-BTE Bluetooth Range Extender  
CX-BTG Wireless Bluetooth Mesh Gateway



#### JOB INFORMATION

TYPE: DATE:

JOB NAME & ADDRESS:

PRODUCT #:

TOTAL QUANTITY:

LAMP TYPE & WATTAGE:

TRANSFORMER:

CONTRACTOR:

SPECIFIER:


**PRODUCT # : CL-450-BT-BK**

• Rail Lights

• Cast Brass

### INCLUDED

#### Stainless Steel Brackets

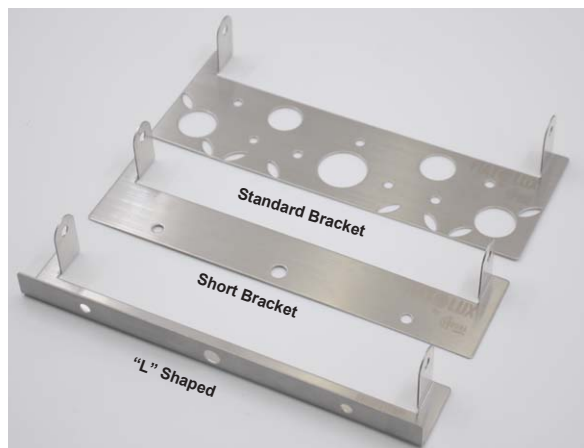


#### Wall Anchors



### OFFERED SEPERATELY

#### Cable Connectors

CX-LOC Quick-locking Cable Connectors, Tan

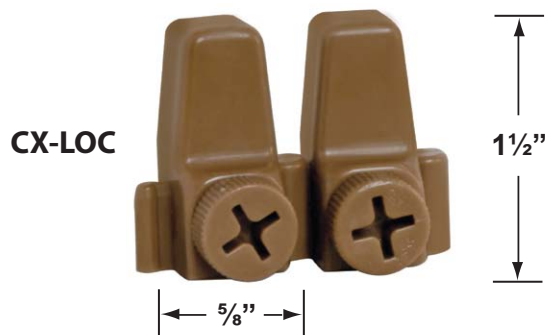

#### Transformers

T-LTF60 60W, 12V, Compact Mini Transformer  
T-LT75 75W, 12 and 15V, Single Circuit Transformer w/ Integrated Mechanical Timer.  
T-LT150 150W, 12-15V, Single Circuit Transformer.  
T-LT300 300W, 12-15V, Single Circuit Transformer.  
T-LT600 600W, 12-15V, Dual Circuit Transformer.  
T-LT900 900W, 12-22V, Triple Circuit Transformer.  
T-FIDT Field Installed Plug-in Digital Timer.  
T-FIT Field Installed Plug-in Mechanical Timer.  
T-TR-FIP Field Installed Plug-in Photocell

#### Dimmers

CX-DIM-100 100W, Low Voltage Dimmer Switch.  
Use with T-LT Series Transformers, Black



CX-DIM-100



T-LT150

#### T-LT75

