

SPECIFICATION SHEET



PRODUCT # : CL-410B-AB

• Directional Lights

• Cast Brass

Fixture Specifications:

<p>Housing: Die-cast brass</p> <p>Finish: AB- Antique Bronze. Natural toning process. AB finish will vary due to artistic process. BK- Black Brass also available</p> <p>Lens: Clear, heat resistant flat glass</p> <p>Socket: PAR36 screw terminal.</p> <p>Lamp: 12V, PAR36 LED Available in 15W Bluetooth mesh smart RGB-WWW, or CCT; 5 / 10 / 15W (adjustable), 6W economy LED or without lamp. See Lamp Guide below for more information.</p> <p>Wiring: Fixture is prewired with a 3-ft 18-2 SPT2-W direct burial cord. Wire connector sold separately. Quick-locking connectors are available from Corona Lighting (CX-LOC) find details on page 2.</p>	<p>Gasket: Silicone double gasketed for water tight sealing</p> <p>Knuckle: Adjustable cast brass knuckle with thumb screw and 1/2" NPT threaded male hub on bottom.</p> <p>Mounting Spike: 8.5" Large slotted spike with brass threads</p> <p>Electrical Notes: A remote 12V transformer is required. Options are available from Corona Lighting (see page 4). Voltage range for lamps are 9-17V. Proper grease/lubricant is suggested on threaded parts during installation process.</p> <p>Warranty: Limited lifetime warranty on fixture housing against manufacturer's defects.</p>
--	---

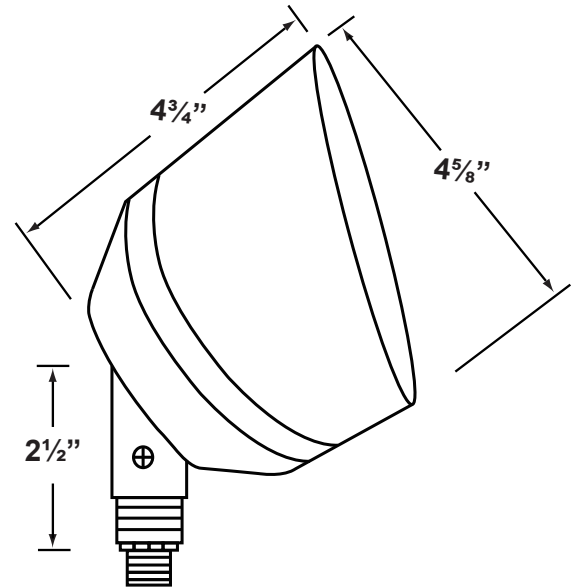

AVAILABLE LED LAMPS

LAMP NUMBER	WATTS	BEAM		COLOR & TEMP.	RATED HOURS	HALOGEN EQUIVALENT
		SPREAD	LUMEN			
Premium LED Lamps <small>(Premium LED lamps have a five (5) year limited warranty against manufacturer's defects)</small>						
L-ED36-15W-BT	1-15	15° / 38° / 60° / 100°	25-1200	2200K-5700K	50,000	100W
L-ED36-15W-CCT	0.2-15	15° / 38° / 60° / 100°	25-1200	2200K-5700K	50,000	100W
L-ED36-15W-ADJ	Push Button Adjustable Modes below:					
5W-Mode	5	15° / 38° / 60° / 100°	450	2700K / 3000K	50,000	40W
10W- Mode	10	15° / 38° / 60° / 100°	800	2700K / 3000K	50,000	75W
15W- Mode	15	15° / 38° / 60° / 100°	1200	2700K / 3000K	50,000	100W
Economy LED Lamps <small>(Economy LED lamps have a three (3) year limited warranty against manufacturer's defects)</small>						
L-ED36-6WEC-FL	6	38°	630	2700K	50,000	35W
L-ED36-6WEC-FL-3K	6	38°	700	3000K	50,000	35W

Bluetooth connection Color changing

For more additional Lamps, and accessories visit Coronalighting.com

JOB INFORMATION

TYPE: DATE:

JOB NAME & ADDRESS:

PRODUCT #:

TOTAL QUANTITY:

LAMP TYPE & WATTAGE:

TRANSFORMER:

CONTRACTOR:

SPECIFIER:

• When ordering LED lamp with a fixture your part number should follow the format below:

• CL - product # - lamp - wattage - lamp angle
CL - 410B-AB - L-ED36 - 6WEC - FL

Example: CL-410B-AB-L-ED36-6WEC-FL

• Corona Lighting reserves the right to make any change and/or improvement to the design and construction of this fixture without further notification.

ACCESSORIES SHEET


PRODUCT # : CL-410B-AB

• Directional Lights

• Cast Brass

Mounting Pedestals

CX-603-BK 3" PVC Mounting Pedestal, 1/2" NPT Female Brass Hub on top, **Black**

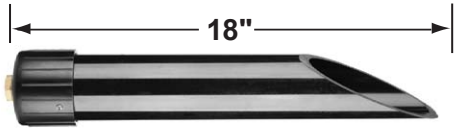

CX-603-BK


CX-621-BK 1" PVC Cap, 1/2" NPT, **Black**

CX-622-BK 2" PVC Cap, 1/2" NPT, **Black**

CX-624-BK 3" PVC Cap, 1/2" NPT Female Brass Hub, **Black**

Ground Spike Supplied


CX-650-BZ 8 1/2" h x 3" w Slotted ABS Spike with Brass Threads, 1/2" NPT, **Bronze**

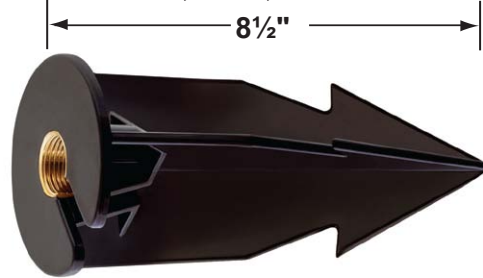

CX-650-BZ

Cable Connectors

CX-LOC Quick-locking Cable Connectors, **Tan**
([Installation Instructions](#))

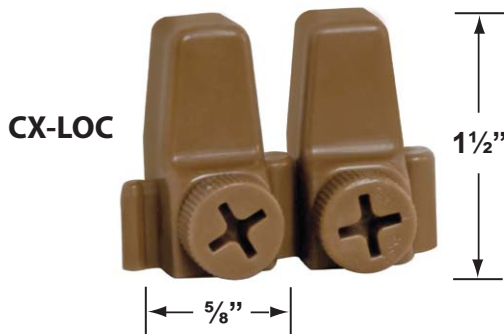

CX-LOC

Optional Ground Spikes

CX-646-BR 8" h x 1/2" w Brass Spike, 1/2" NPT, **Natural Brass**



CX-646-BR

Mounting Canopies

CX-705B-AB Brass Flat Canopy, 1/2" NPT, **Antique Bronze**

CX-709B-AB Brass Raised Canopy, 1/2" NPT, **Antique Bronze**

CX-718B-AB 5" Brass Canopy, 3-Hole 1/2" NPT, **Antique Bronze**

CX-719B-AB Brass Tree Mounting Bracket, 1/2" NPT, **Antique Bronze**

CX-721B-AB Brass Tree Mount Canopy with 15" Rubber Strap stretches to 22", **Antique Bronze**

CX-722B-AB Brass Tree Mount Canopy with 22" Rubber Strap stretches to 33", **Antique Bronze**


CX-723B-AB Brass Tree Mount Canopy with 31" Rubber Strap stretches to 45", **Antique Bronze**




CX-705B-AB



CX-709B-AB



CX-718B-AB

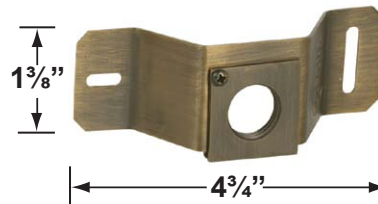

CX-719B-AB



CX-722B-AB

ACCESSORIES SHEET

PRODUCT # : CL-410B-AB


• Directional Lights

• Cast Brass

Mounting Posts For Sign Light & Path Light Applications


- CX-678B-AB 24" Brass Single Head Post, **Antique Bronze**
- CX-679B-AB 24" Brass Double Head Post, **Antique Bronze**
- CX-690B-AB 18" Brass Single Head Post, **Antique Bronze**
- CX-693B-AB 18" Brass Double Head Post, **Antique Bronze**

CX-718B-AB (Mounting Canopies pg 2) is required for sign light installation.

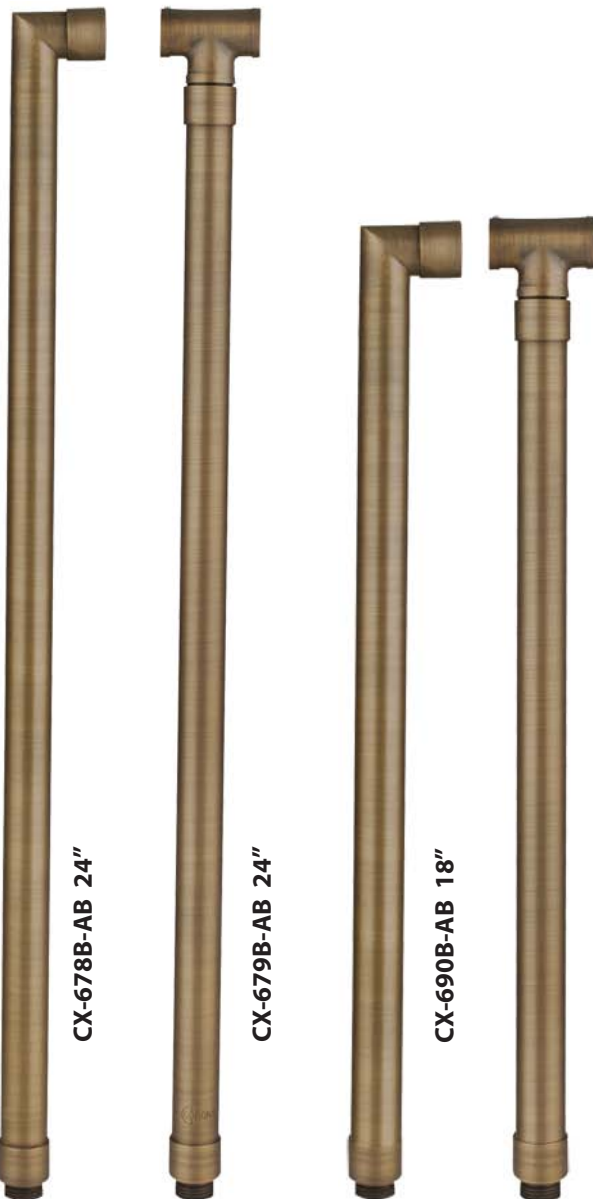

Mounting Risers

- CX-682B-AB 6" Brass Riser, 1/2 NPT Male/Female, **Antique Bronze**
- CX-683B-AB 12" Brass Riser, 1/2 NPT Male/Female, **Antique Bronze**
- CX-684B-AB 18" Brass Riser, 1/2 NPT Male/Female, **Antique Bronze**
- CX-685B-AB 24" Brass Riser, 1/2 NPT Male/Female, **Antique Bronze**

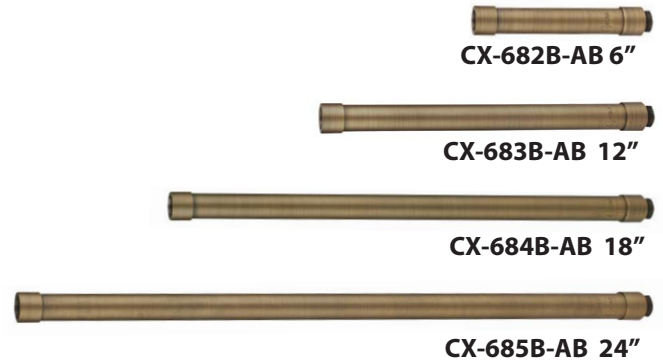

Dimmer

- CX-DIM-100 100W, Low Voltage Dimmer Switch.
Use with T-LT Series Transformers, **Black**



CX-DIM-100

PRODUCT # : CL-410B-AB

• Directional Lights

• Cast Brass

Stainless Steel Pool and Spa Rated Transformers

- T-LTF60 60W, 12V, Compact Mini Transformer
- T-LT75 75W, 12 and 15V, Single Circuit Transformer w/ Integrated Mechanical Timer.
- T-LT150 150W, 12-15V, Single Circuit Transformer.
- T-LT300 300W, 12-15V, Single Circuit Transformer.
- T-LT600 600W, 12-15V, Dual Circuit Transformer.
- T-LT900 900W, 12-22V, Triple Circuit Transformer.
- T-FIDT Field Installed Plug-in Digital Timer.
- T-FIT Field Installed Plug-in Mechanical Timer.
- T-TR-FIP Field Installed Plug-in Photocell



T-LT75



T-LT150



T-FIDT



T-LT300



T-TR-FIP



T-LT600



T-LT900